



VD-7032

VDSL BANDPASS FILTER P/N: VD-7032 DATA SHEET

Feature




- Design to meet,UL94v-0.
- Operating Temperature: -10°C to+60°C .
- Storage temperature: -25°C to +75°C .

Electrical Specifications @ 25°C

Description	Passband Frequency	Insertion loss (dB Max)	Return loss (dB Min)	Stopband Frequency	Attn. (dB min)		Impedance
					20K ~ 600KHz	600K ~ 700KHz	
BPF	1.1MHz ~7.9MHz	-2	-10	20K ~ 600KHz	-50	-25	120 Ω
				600K ~ 700KHz			

Mechanical

PIN	ALOCALTION
1	LINE
2	LINE
9	RX +
10	RX -
15	TX +
16	TX -
3,4,5,6,7,8	NC
11,12,13,14	NC

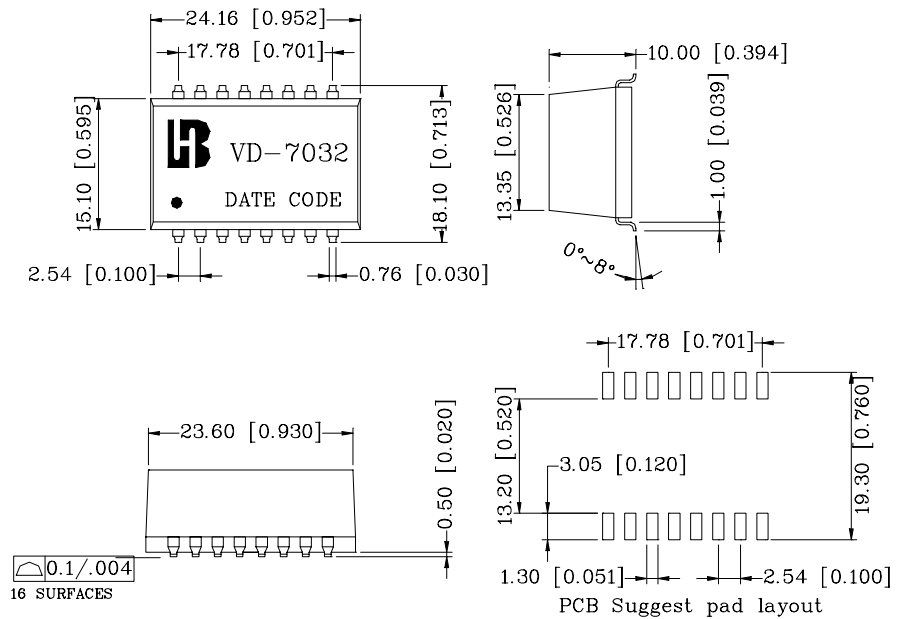

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]
0.xx±[0.002]