

**P/N: VD-7064 DATA SHEET****Feature**


- Design to meet, UL94v-0.
- Operating temperature range: 0°C to +60°C.
- Storage temperature range: -25°C to +75°C.

Electrical Specifications @ 25°C

Description	LPF
Cut off frequency	-3.0dB Typ. @18KHz
Passband Frequency	DC to 16KHz
Insertion Loss	-1.0dB MAX. @DC~16KHz
Return Loss	-12dB Min. @DC~16KHz
Attenuation	-65dB MIN @ 30KHz -52dB MIN @ 60KHz
Impedance	150Ω

Schematic**Mechanical**

PIN	ALOCATION
1	LINE+
2	LINE-
9	TEL+
10	TEL-
3,4,5,6,7,8,	NC
11,12,13,14,15,16	NC

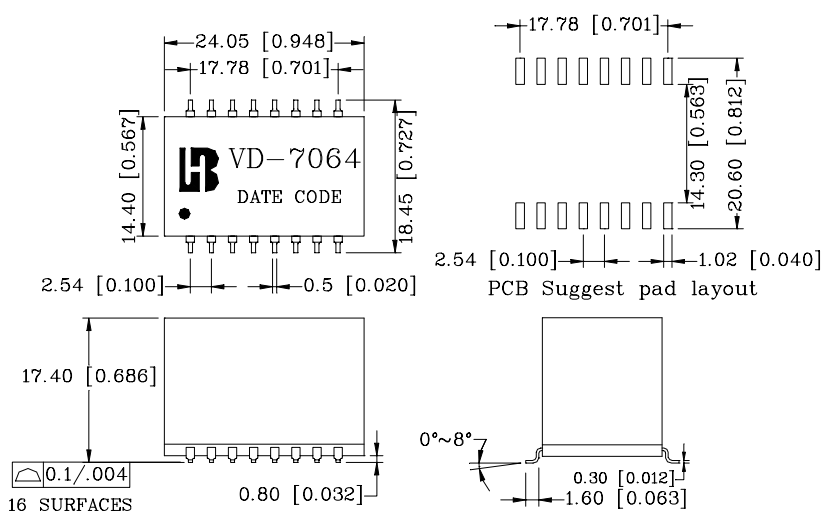

Units: mm[Inches] Tolerances: xx.x0±0.25[0.010]
0.xx±0.05[0.002]