


IEC Appliance Outlet F, Snap-in Mounting, Front Side, Solder or Quick-connect Terminal



Snap-In Version

**Description**

- Panel Mount:
 - Snap-in version from front side
- Connector, Pin temperature 70 °C, Protection class I
- Solder terminals or quick connect terminals

Approvals

- VDE License Number: 40017345
- UL License Number: E103791

Other versions on request

- Other panel thickness
- Types for rivet mounting available upon request
- Types for enhanced glow wire test requirements acc. IEC 60695-2-11 to -13 for the use in unattended household equipment acc. IEC 60335-1

Weblinks

[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

Technical Data


Ratings IEC	10A / 250VAC; 50Hz
Ratings UL/CSA	15A / 250VAC; 60Hz
Dielectric Strength	> 2kVAC between L-N > 2kVAC between L/N-PE (1 min/50Hz)
Allowable Operation Temp.	-25 °C to 70 °C
Degree of Protection	from front side IP 30 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Solder terminals or quick connect terminals
Panel Thickness s	Snap-in: 1/ 1.2/ 1.5/ 2/ 2.5/ 3 mm
Material: Housing	Thermoplastic, black, UL 94V-0

Appliance-Inlet/-Outlet	F acc. to IEC/EN 60320-2-2, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 10A, Protection class I
-------------------------	---

Dimensions

6600-4

Length 35 mm

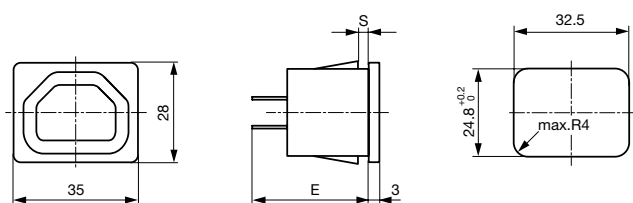

- E: solder terminals 3.5x0.8mm 24.1mm
- E: quick connect terminals 4.8x0.8mm 26.5mm
- E: quick connect terminals 6.3x0.8mm 27.5mm
- S: 1.0; 1.2; 2.0; 2.5; 3.0 mm

Distributor-Stock-Check | SCHURTER-Stock-Check | e-Store

Variants

Panel mounting	Panel Thickness s [mm]	Terminal	Order Number
Snap-in	1	Quick connect terminals 4.8 x 0.8 mm	6600.4210
Snap-in	1.2	Quick connect terminals 4.8 x 0.8 mm	6600.4212
Snap-in	1.5	Quick connect terminals 4.8 x 0.8 mm	6600.4215
Snap-in	2	Quick connect terminals 4.8 x 0.8 mm	6600.4220
Snap-in	2.5	Quick connect terminals 4.8 x 0.8 mm	6600.4225
Snap-in	3	Quick connect terminals 4.8 x 0.8 mm	6600.4230
Snap-in	1	Quick connect terminals 6.3 x 0.8 mm	6600.4310
Snap-in	1.2	Quick connect terminals 6.3 x 0.8 mm	6600.4312
Snap-in	1.5	Quick connect terminals 6.3 x 0.8 mm	6600.4315
Snap-in	2	Quick connect terminals 6.3 x 0.8 mm	6600.4320
Snap-in	2.5	Quick connect terminals 6.3 x 0.8 mm	6600.4325
Snap-in	3	Quick connect terminals 6.3 x 0.8 mm	6600.4330
Snap-in	1	Solder terminals 3.8 x 0.8 mm	6600.4110
Snap-in	1.2	Solder terminals 3.8 x 0.8 mm	6600.4112
Snap-in	1.5	Solder terminals 3.8 x 0.8 mm	6600.4115
Snap-in	2	Solder terminals 3.8 x 0.8 mm	6600.4120
Snap-in	2.5	Solder terminals 3.8 x 0.8 mm	6600.4125
Snap-in	3	Solder terminals 3.8 x 0.8 mm	6600.4130

Articles for enhanced glow wire test requirements acc. IEC 60695-2-11 to -13 can be ordered with ending ".15" (xxxx.xxxx.15). They are suitable for the use in unattended household equipment acc. IEC 60335-1.

Packaging unit 50 Pcs

Accessory

Description



Assorted Covers
Rear Cover

0859.0047



Cord retaining kits
Cord retaining strain relief

Countersunk, D
Countersunk, F

4700.0004
4700.0006

Mating Inlets/Plugs

Category / Description

Interconnection Cord



Interconnection Cord with IEC Plug E, Angled
Interconnection Cord with IEC Plug E, Angled
Interconnection Cord with IEC Plug E, Straight
Interconnection Cord with IEC Plug G, Angled
Interconnection Cord with IEC Plug G, Angled
Interconnection Cord with IEC Plug G, Straight

0607
0608
0609
607B
608B
609B



Plug

IEC Plug E, Cord Connector (Rewireable), Straight, max. cable Diameter 8.5 mm	4732
IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 10 mm	4733
IEC Plug E, Cord Connector (Rewireable), Straight, max. Cable Diameter 10 mm	4735
IEC Plug E, Cord Connector (Rewireable), Angled, max. Cable Diameter 10 mm	4736
IEC Plug E, Cord Connector (Rewireable), Straight	9009
IEC Plug E, Cord Connector (Rewireable), Angled	9013
IEC Plug E, Cord Connector (Rewireable), Angled	P685