
## FERROXCUBE



Supersedes data of September 2008

2010 Sep 01

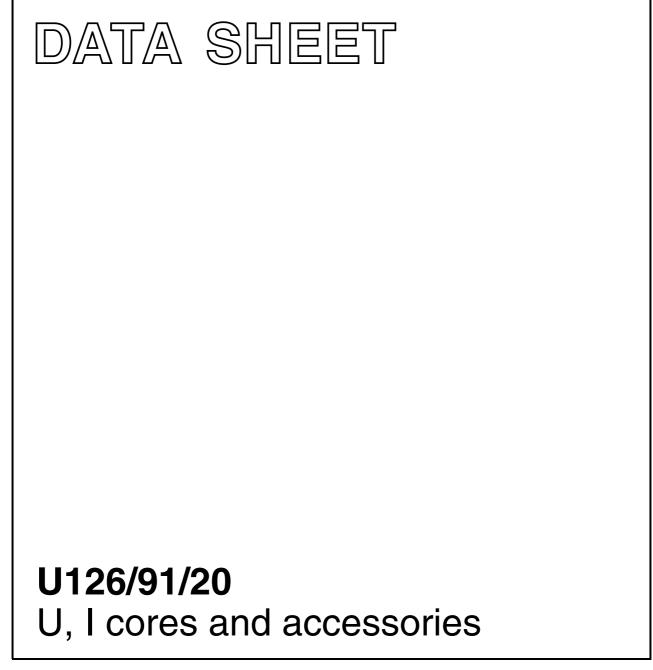


# U, I cores and accessories

## U126/91/20

#### **U CORES**

#### Effective core parameters

SYMBOL	PARAMETER	VALUE	UNIT
Σ(I/A)	core factor (C1)	0.857	mm <sup>-1</sup>
Ve	effective volume	268800	mm <sup>3</sup>
l <sub>e</sub>	effective length	480	mm
A <sub>e</sub>	effective area	560	mm <sup>2</sup>
A <sub>min</sub>	minimum area	560	mm <sup>2</sup>
m	mass of core half	≈ 680	g

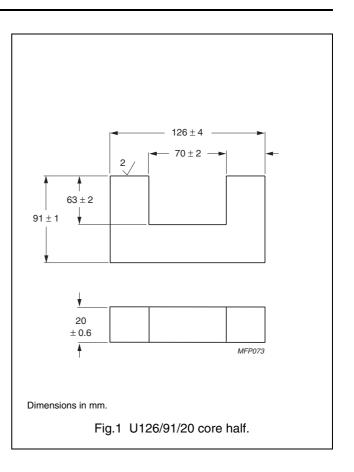

#### Core halves

 $A_L$  measured on a combination of 2 U cores.

GRADE	A <sub>L</sub> (nH)	μ <sub>e</sub>	TYPE NUMBER
3C90	3300 ± 25 %	≈ 2050	U126/91/20-3C90
3C94	3300 ± 25 %	≈ 2050	U126/91/20-3C94

#### Properties of core sets under power conditions

	B (mT) at	CORE LOSS (W) at		
GRADE	H = 250 A/m; f = 25 kHz; T = 100 °C	f = 25 kHz; B = 200 mT; T = 100 °C	f = 100 kHz; B = 100 mT; T = 100 °C	
3C90	≥ 320	≤ <b>35</b>	≤ <b>40</b>	
3C94	≥ 320	_	≤ <b>32</b>	

### U, I cores and accessories

#### DATA SHEET STATUS DEFINITIONS

DATA SHEET STATUS	PRODUCT STATUS	DEFINITIONS
Preliminary specification	Development	This data sheet contains preliminary data. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.
Product specification	Production	This data sheet contains final specifications. Ferroxcube reserves the right to make changes at any time without notice in order to improve design and supply the best possible product.

#### DISCLAIMER

**Life support applications** — These products are not designed for use in life support appliances, devices, or systems where malfunction of these products can reasonably be expected to result in personal injury. Ferroxcube customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Ferroxcube for any damages resulting from such application.

#### **PRODUCT STATUS DEFINITIONS**

STATUS	INDICATION	DEFINITION
Prototype	prot	These are products that have been made as development samples for the purposes of technical evaluation only. The data for these types is provisional and is subject to change.
Design-in	des	These products are recommended for new designs.
Preferred		These products are recommended for use in current designs and are available via our sales channels.
Support	sup	These products are <b>not</b> recommended for new designs and may not be available through all of our sales channels. Customers are advised to check for availability.