



1. Mechanical Dimensions:

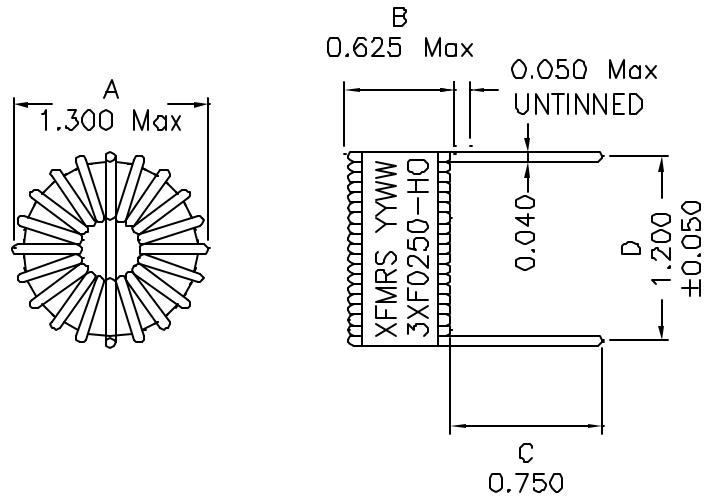

2. Schematic:



3. Electrical Specifications: @25°C

Inductance: 250 μ H \pm 10% @1.0KHz 1.0V

Rated Current: 3.0Adc

DC Resistance: 0.070 Ohms Max

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

DOC REV: A/4

PROPRIETARY Document is the property of XFMR3 Group & is not allowed to be duplicated without authorization.

XFMR3 Inc www.XFMR3.com	Title: INDUCTOR		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx \pm 0.020 Dimensions in Inch	P/N: 3XF0250-H0		REV. A
	DWN.	Juan Mao	Oct-19-07
SHEET 1 OF 1	CHK.	YK Liao	Oct-19-07
	APP.	MS	Oct-19-07