



High vacuum FULL WAVE RECTIFYING VALVE
 TUBE REDRESSEUR BIPLAQUE à vide poussé
 Hochvakuum VOLLWEGGLEICHRICHTERROHRE

Heating: direct by A.C.
 Chauffage: direct par C.A.
 Heizung: direkt durch Wechselstrom

$V_f = 4,0 \text{ V}$
 $I_f = 0,72 \text{ A}$

Dimensions in mm
 Dimensions en mm
 Abmessungen in mm





Base, culot, Fuss: Rimlock

Operating characteristics and limiting values
 Caractéristiques d'utilisation et caractéristiques limites
 Betriebs- und Grenzdaten

| | | | |
|--------------|------------|------------|----------------------|
| $V_{tr} =$ | 2x300 | 2x400 | max. 2x500 V_{eff} |
| $I_o =$ | max. 70 | max. 60 | max. 60 mA |
| $C_{filt} =$ | max. 50 | max. 50 | max. 50 μF |
| $R_t =$ | min. 2x100 | min. 2x150 | min. 2x200 Ω |

AZ 41

PHILIPS

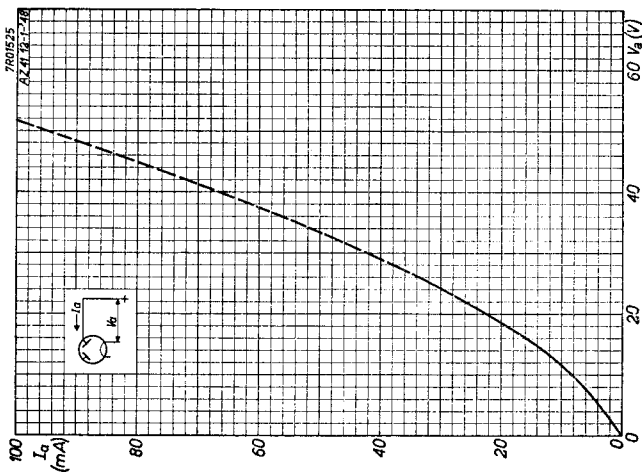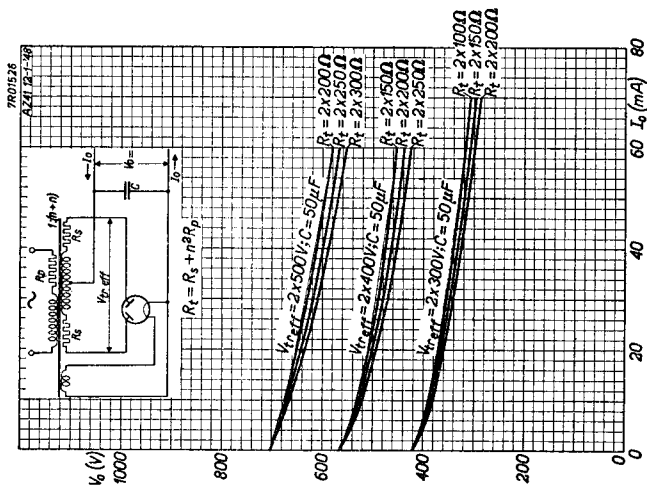

A

PHILIPS



*Electronic
Tube*

HANDBOOK

| page | AZ41 sheet | date |
|-------------|-----------------------|-------------|
| 1 | 1 | 1953.06.06 |
| 2 | A | 1953.06.06 |
| 3 | FP | 1999.06.26 |