20 x 6.0 x 4.0 Ceramic Patch Antenna (CP-Standard)

1. Explanation of Product Number

H 2 P 1 3 Q B D A G 0 1 0 0 (1) (2) (3) (4) (5) (6)



Product Code:

(1) Product Categories:

3: ceramic patch antenna

(2) Dimensions and Polarization:

QB: 20 x 6.0 x 4.0 (mm)//right hand circular polarization

(3) Material:

D: MA-HM

(4) Working Frequency:

A: 1575.42MHz

(5) Ground Plane Dimensions:

G: 25x25(mm)

(6) Antenna Series:

01 : serial number

Tolerances (Unless other X: \pm 1 X.X: \pm 0. Angle: \pm	• •	Unictr	Unictron Technologies Co Website: www.unictro	•
Scale :	Unit: mm			
Prepared By : Meiping	Checked By : Chinling	TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCE		
Designed By : Mike	Approved By : Herbert	OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION		ERMISSION
TITLE: 20 x 6.0 x 4.0 Ceramic Patch		DOCUMENT	H2P13QBDAG0100	REV.
Antenna (CP-Standard)		NO.		E

2. Features

- *Stable and reliable in performances
- *Low temperature coefficient of frequency
- *Compact size
- *RoHS compliance

3. Applications

- *Navigation systems or position tracking systems
- *Hand-held devices when GPS function is needed, e.g., PDA, Smart phone, PND.

4. Description

Unictron's patch antenna series are ceramic antennas specially designed for GPS application. This ceramic patch antenna has excellent stability and sensitivity through the use of high performance proprietary ceramic materials and processes.


5. Electrical Specifications (25x25 (mm) ground plane)

Characteristics		Specifications	Unit	
Outline Dimensions		20 x 6.0 x 4.0	mm	
Ground Plane		25×25	mm	
Center Frequency*		1575.42 <u>+</u> 2	MHz	
Bandwidth (under -10dB return loss)		9.6 min.	MHz	
VSWR		1.5 max.		
Impedance		50	Ω	
Polarization		RHCP		
Gain	@Zenith	-4.7 (typical)	dDia	
	@10°Elevation	-8.9 (typical)	dBic	
Axial Ratio		3 (typical)	dB	
Temperature Coefficient of Frequency		0±20 max (@ -20°C~80°C)	ppm/°C	

^{*}Center frequency will be offset to working frequency according to the conditions of user's ground plane and radome.

Tolerances (Unless other $X: \pm 1$ $X.X: \pm 0.1$ Angle: \pm	• •	Unictr	Unictron Technologies Co Website: www.unictro	•
Scale :	Unit: mm			
Prepared By : Meiping	Checked By : Chinling		ORPORATION AND SHALL NOT BE REF	
Designed By : Mike	Approved By : Herbert	OR USED IN ALL CI	RCUMSTANCES WITHOUT WRITTEN PE	RMISSION
TITLE: 20 x 6.0 x 4.0 Ceramic Patch		DOCUMENT	H2P13QBDAG0100	REV.
Antenna (CP-Standard)		NO.	HZF 13QBDAG0100	E


6. Antenna Dimensions (unit: mm)

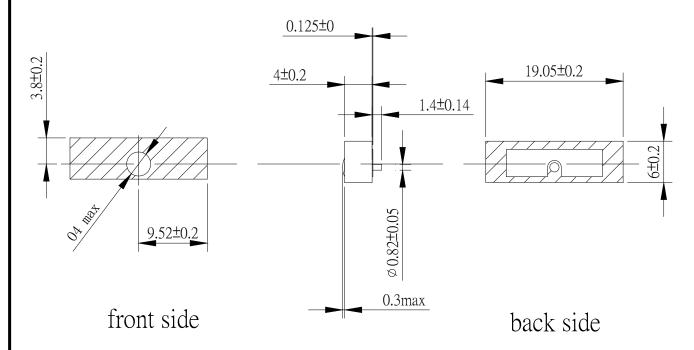


7. Electrical Characteristics (25x25(mm) ground plane)

Return Loss(S_{11})


Smith Chart

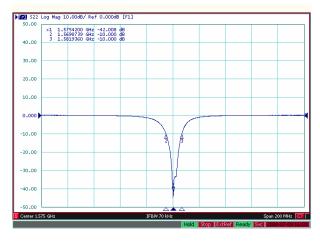

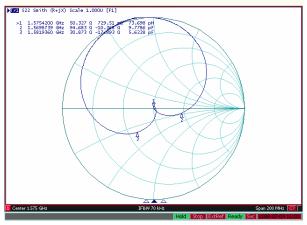



Tolerances (Unless oth X: \pm 1 X.X: \pm 0 Angle: \pm	• •	Unictr Technologies	Unictron Technologies Co Website: www.unictro	•
Scale :	Unit: mm			
Prepared By : Meiping	Checked By : Chinling	TECHNOLOGIES CORPORATION AND SHALL NOT BE REPRODUCI		
Designed By : Mike	Approved By : Herbert	OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION		
TITLE: 20 x 6.0 x 4.0 Ceramic Patch		DOCUMENT	H2P13QBDAG0100	REV.
Antenna (CP-Standard)		NO.	TIZI ISQBDAG0100	Е

8. Axial Ratio (25x25 (mm) ground plane)

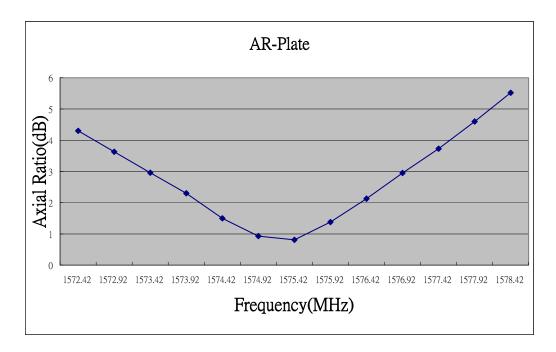

9. Radiation Pattern (25x25(mm) ground plane)



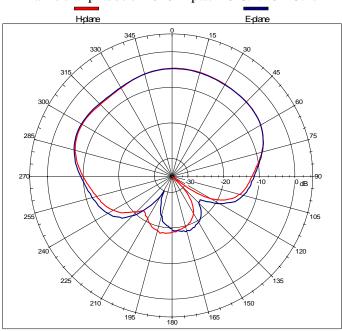

Right hand circular polarized signal f₀=1575.42MHz

Tolerances (Unless other X: \pm 1 X.X: \pm 0.1 Angle: \pm	• •	Unictr Technologies	Unictron Technologies Co Website: www.unictro	
Scale :	Unit: mm			
Prepared By : Meiping	Checked By : Chinling		ORPORATION AND SHALL NOT BE REF	
Designed By : Mike	Approved By : Herbert	OR USED IN ALL CIRCUMSTANCES WITHOUT WRITTEN PERMISSION		ERMISSION
TITLE: 20 x 6.0 x 4.0 Ceramic Patch		DOCUMENT	H2P13QBDAG0100	REV.
Antenna (CP-Standard)		NO.		Е