


## Absolute maximum ratings

(Ta=25°C)

| Symbol                | Ratings   | Unit |
|-----------------------|---|------|
| V <sub>DSS</sub>      | 60  | V    |
| V <sub>GSS</sub>      | ±20   | V    |
| I <sub>D</sub>        | ±3  | A    |
| I <sub>D(pulse)</sub> | ±6 (PW≤1ms, Du≤1%)  | A    |
| E <sub>AS*</sub>      | 6.8   | mJ   |
| I <sub>AS</sub>       | 3   | A    |
| P <sub>T</sub>        | 4 (Ta=25°C, with all circuits operating, without heatsink)<br>28 (Tc=25°C, with all circuits operating, with infinite heatsink) | W    |
| θ <sub>J-a</sub>      | 31.2 (Junction-Air, Ta=25°C, with all circuits operating)   | °C/W |
| θ <sub>J-c</sub>      | 4.46 (Junction-Case, Tc=25°C, with all circuits operating)  | °C/W |
| T <sub>ch</sub>       | 150   | °C   |
| T <sub>stg</sub>      | -40 to +150   | °C   |


\* : V<sub>DD</sub>=20V, L=1mH, I<sub>L</sub>=3A, unclamped, see Fig. E on page 15.

## Equivalent circuit diagram

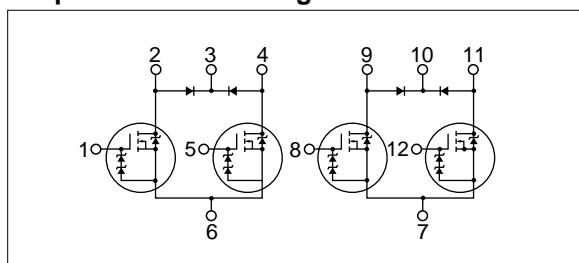


## Characteristic curves


### I<sub>D</sub>-V<sub>Ds</sub> Characteristics (Typical)

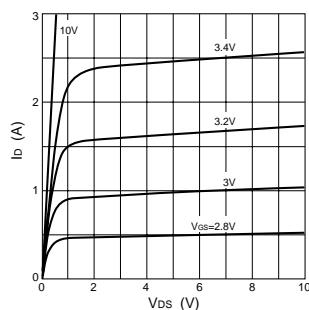


### I<sub>D</sub>-V<sub>Gs</sub> Characteristics (Typical)

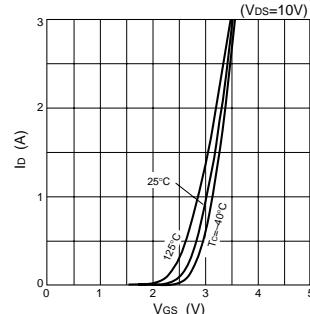


### R<sub>Ds(on)</sub>-I<sub>D</sub> Characteristics (Typical)

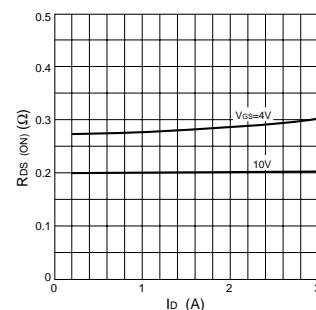


### R<sub>e(yfs)</sub>-I<sub>D</sub> Characteristics (Typical)

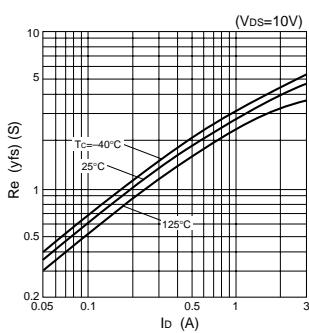


### R<sub>Ds(on)</sub>-T<sub>c</sub> Characteristics (Typical)

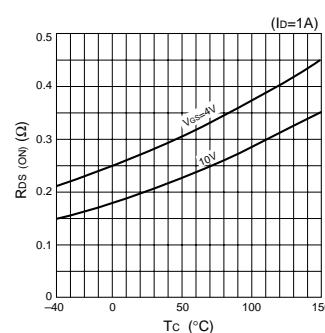


### Capacitance-V<sub>Ds</sub> Characteristics (Typical)

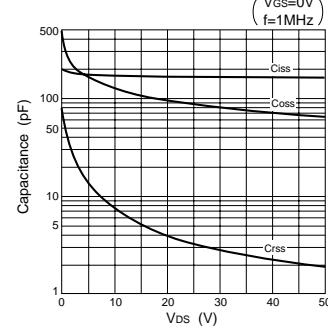

### I<sub>DR</sub>-V<sub>Ds</sub> Characteristics (Typical)

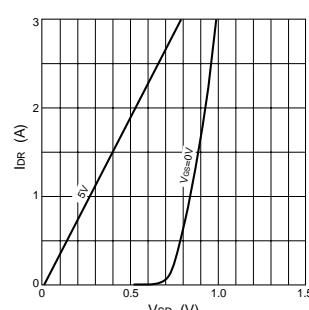

### Safe Operating Area (SOA)

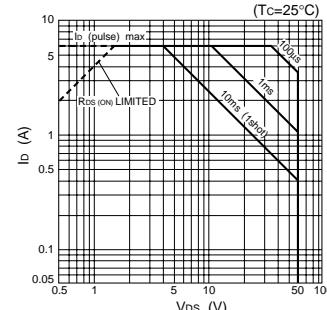

### P<sub>T</sub>-T<sub>a</sub> Characteristics

