

8.0kV 5mA HIGH VOLTAGE DIODES

ESJA54-08A is high reliability resin molded type high voltage diode in small size package which is sealed a multilayed mesa type silicon chip by epoxy resin.

■ Features

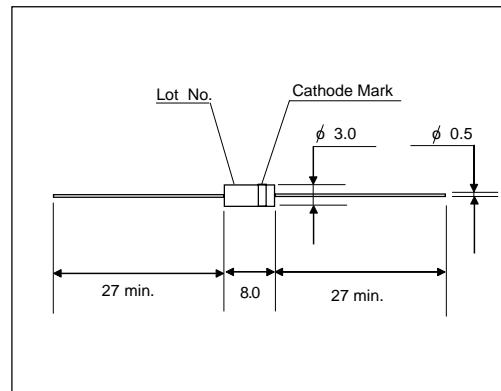
- High speed switching
- High Current
- High surge resistivity for CRT discharge
- High reliability design
- High Voltage

■ Applications

- X light Power supply
- Laser
- Voltage doubler circuit
- Microwave emission power

■ Maximum Ratings and Characteristics

- Absolute Maximum Ratings

■ Outline Drawings : mm**■ Cathode Mark**

Type	Mark
ESJA54-08A	

Items	Symbols	Condition	ESJA54-08A	Units
Repetitive Peak Reverse Voltage	V_{RRM}		8.0	kV
Average Output Current	I_o	Ta=25°C, Resistive Load	5.0	mA
Surge Current	I_{FSM}		0.5	A _{peak}
Junction Temperature	T_j		125	°C
Allowable Operation Case Temperature	T_c		125	°C
Storage Temperature	T_{stg}		-40 to +125	°C

- Electrical Characteristics (Ta=25°C Unless otherwise specified)

Items	Symbols	Conditions	ESJA54-08A	Units
Maximum Forward Voltage Drop	V_F	at 25°C, $I_F = I_{F(AV)}$	30	V
Maximum Reverse Current	IR1	at 25°C, $V_R = V_{RRM}$	2.0	uA
	IR2	at 100°C, $V_R = V_{RRM}$	5.0	uA
Maximum Reverse Recovery Time	T_{rr}	at 25°C	100	nS
Junction Capacitance	C_j	at 25°C, $V_R=0V, f=1MHz$	2.0	pF