
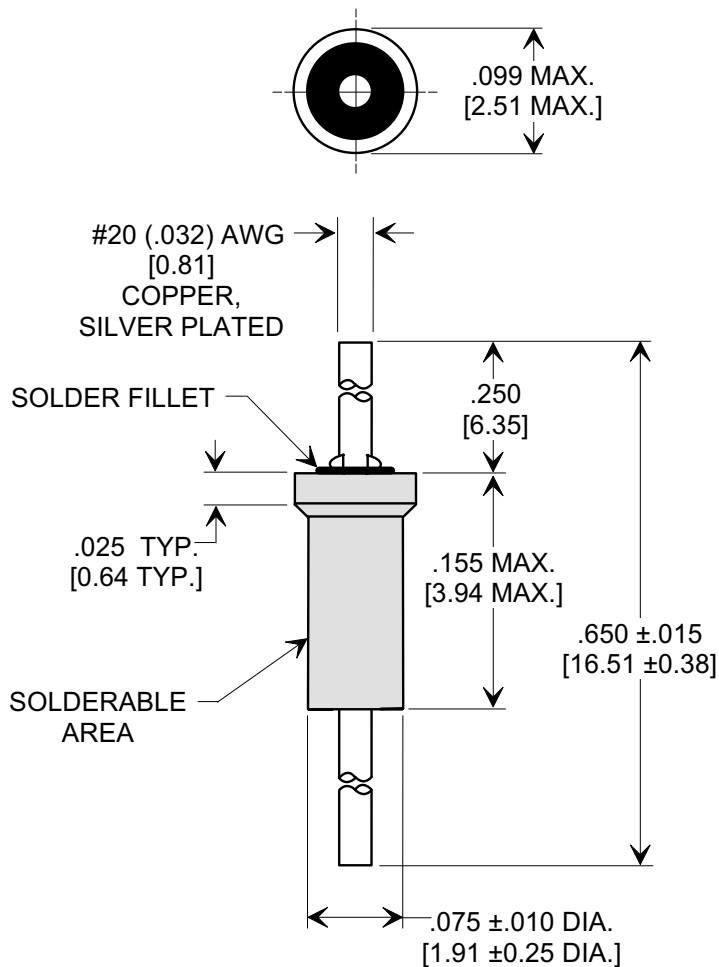



MARKETING SALES DRAWING

DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



SPECIFICATIONS

CAP. VALUE	1500 pF
CAP. TOL.	+100, -0%
TEMP. CHAR.	X7U
OPERATING TEMP.	-55° TO +125°C
OPERATING VOLT.	100 WVDC @ +125°C
DIELECTRIC WITHSTANDING	400 VDC, 2 SEC.

NOTES:

- TUSONIX STANDARD PART NUMBER: 2463-002-X7U0-152P.
 TUSONIX RoHS COMPLIANT PART
 NUMBER: 2463-002-X7U0-152P LF.
 CUSTOMER MUST SPECIFY STANDARD OR RoHS PART
 NUMBER WHEN ORDERING.
- PART MARKING: STANDARD PART, NO MARKING.
 RoHS PART: GREEN LABELING ON PACKAGING.

X-2015 Rev-0

REVISION RECORD Original Release C.O. 19990301-1-01 ADDED NOTES 1, 2, CIRCUIT & DIEL. WITH. ADDED TOL TO DIM .650. S.M. 08-19-05 20050818-7-06	0	1	--TOLERANCES-- Unless Otherwise Specified	Title SHOULDER FEED-THRU	
	DECIMAL ± .031 [0.79]		Drawn S.M. 03-03-99 Scale NONE		
	ANGLES ±		Approved H.R. 03-03-99		
	TUSONIX TUCSON, ARIZONA		A	2463-002-X7U0-152P	