




**PART NUMBER: CP60440**

**DESCRIPTION: PELTIER MODULE**

**FEATURES**

- solid state device
- small and lightweight
- precise temperature control
- quiet operation
- RoHS compliant

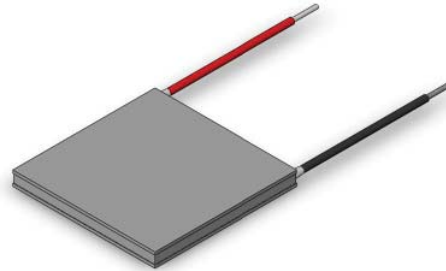

**INPUT**

parameter	conditions/description	min	nom	max	units
resistance	measured by AC 4-terminal method at 25°C	1.953	2.170	2.387	Ω
current	maximum current at ΔTmax			6	A
voltage	maximum voltage at ΔTmax			15.4	V

**OUTPUT**

parameter	conditions/description	min	nom	max	units
Qmax <sup>1</sup>	Th = 27°C			53.0	W
	Th = 50°C			59.3	W
ΔTmax <sup>2</sup>	Th = 27°C			68	°C
	Th = 50°C			75	°C

Notes: 1. Maximum cooling capacity at Imax, Vmax, and ΔT = 0°C  
2. Maximum temperature difference at Imax, Vmax, Q = 0 W (maximum parameters are measured in a vacuum)

**GENERAL**

parameter	conditions/description	min	nom	max	units
solder melting temperature	connection between thermoelectric pairs			138	°C
assembly compression				98.07	N/cm <sup>2</sup>
				10	kgf/cm <sup>2</sup>
hot side plate				90	°C
MTBF				200,000	hours


\*for further information and product selection refer to peltier application notes.pdf




PART NUMBER: CP60440

DESCRIPTION: PELTIER MODULE


**PERFORMANCE (Th=27°C)**

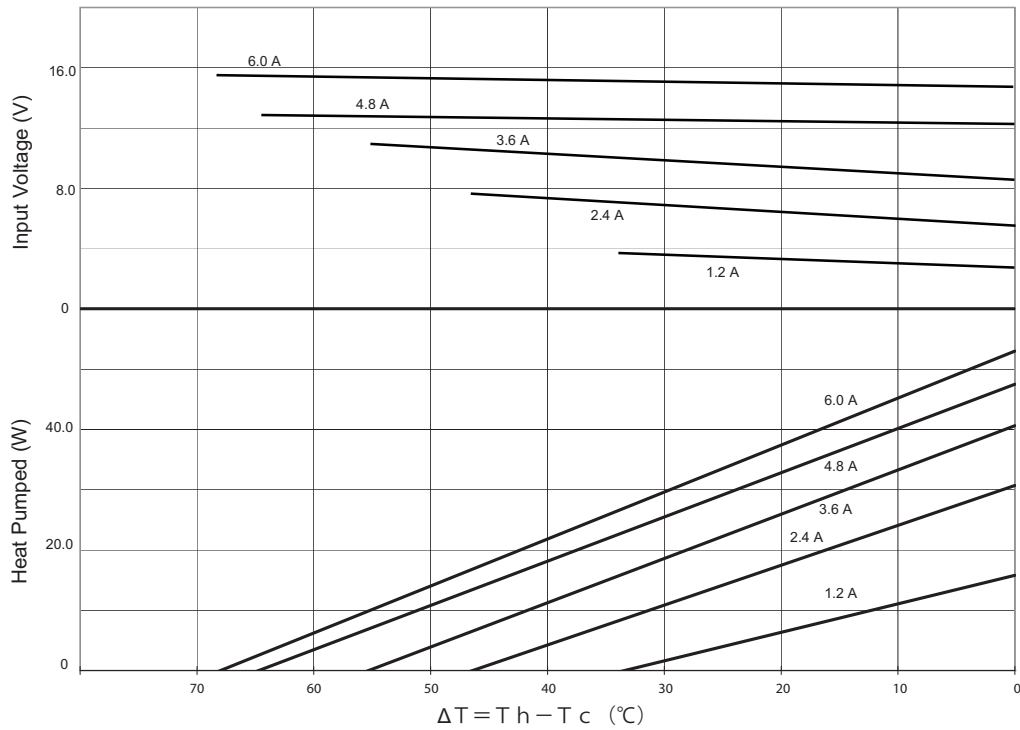

**PERFORMANCE (Th=50°C)**

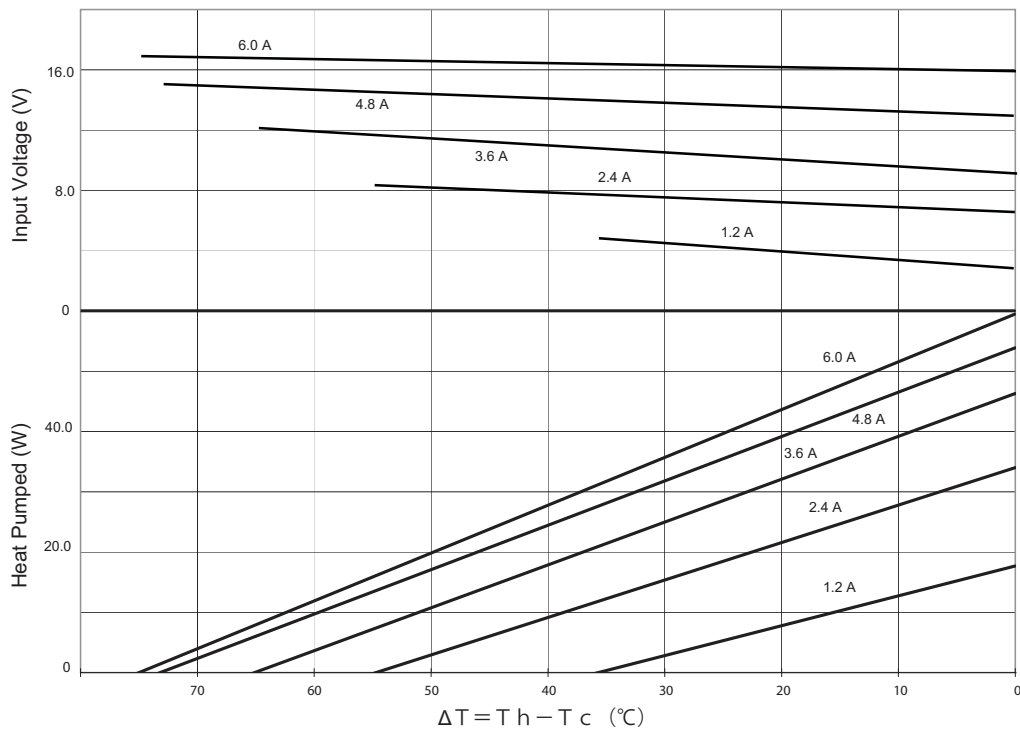

REV.	DESCRIPTION	DATE
A	NEW DRAWING	10/3/2007
B	lead wire material change	8/11/2008

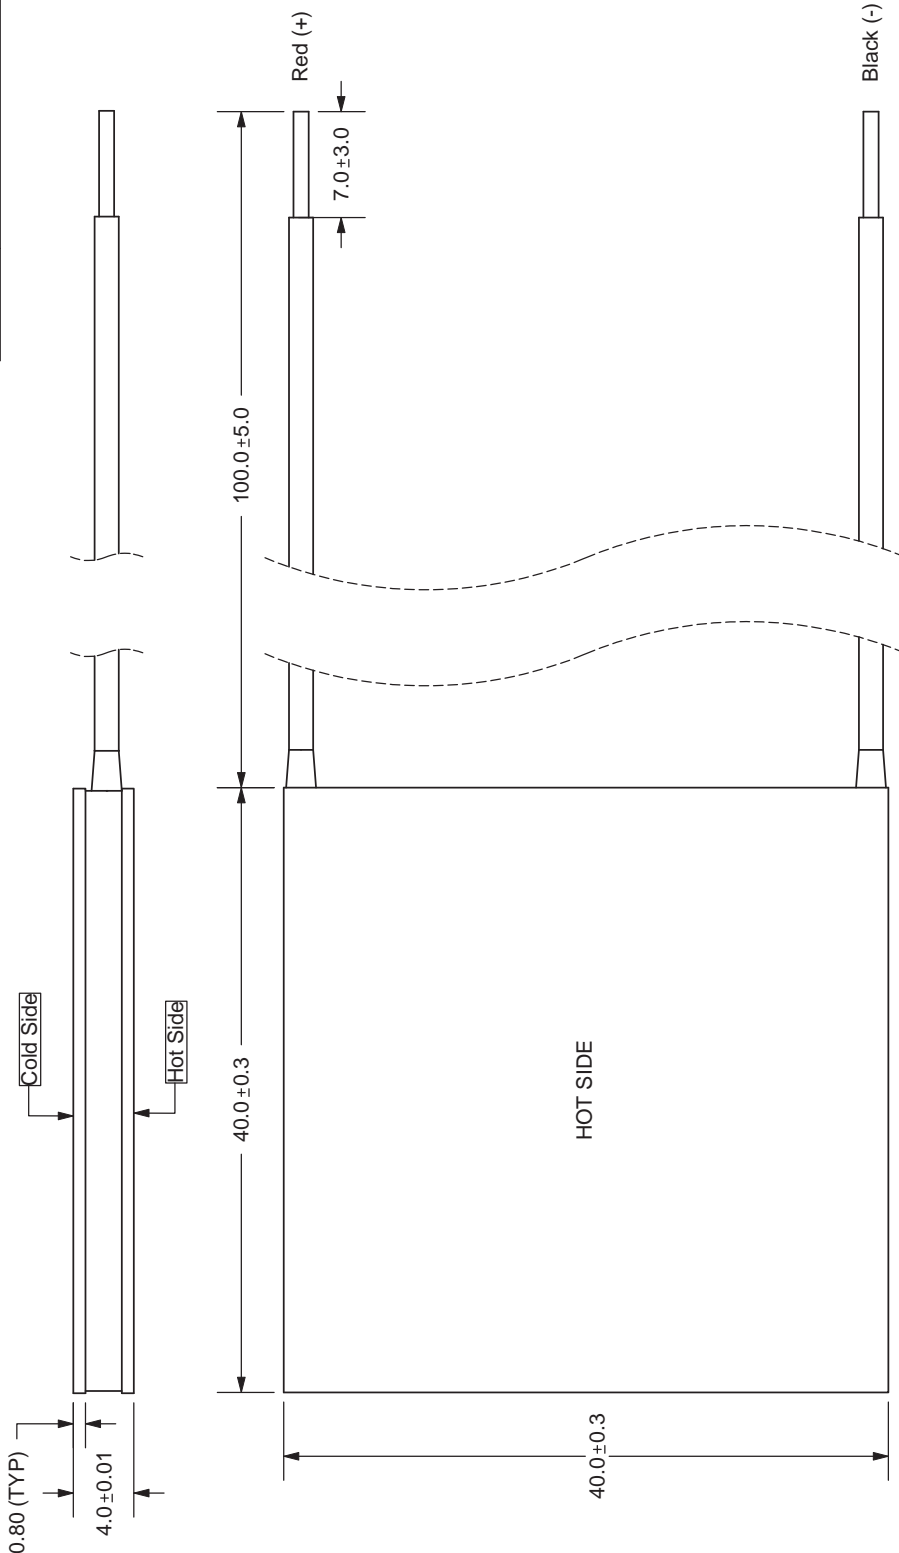

TOLERANCE:  
±0.1mm UNLESS OTHERWISE NOTED

**CUI INC**  
 20050 SW 112th Ave.  
 Tualatin, OR 97062  
 Phone: 503-612-2300  
 800-275-4899  
 Fax: 503-612-2383  
 Website: www.cui.com

TITLE: PELTIER MODULE	REV: B
PART NO. CP60440	UNITS: MM [INCHES]
DRAWN BY: ZRJ	APPROVED BY:
	SCALE: 2:1

CERAMIC PLATE	MATERIAL	PLATING
SEALER	Al <sub>2</sub> O <sub>3</sub> (Alumina)	White Color
LEAD WIRE	Silicon Rubber RTV	White Color
JOINT COVER	UL1674	Tin
	Silicon Rubber RTV	White Color

PC FILE NAME: CP60440

COPYRIGHT 2009 BY CUI INC.