

## MOSFET BASED DC SOLID-STATE RELAY

- ▶ Latest MOSFET technology generation.
- ▶ Ultra low on-state resistance.
- ▶ Low output leakage current.
- ▶ Low control current consumption.
- ▶ Built-in overvoltage protection
- ▶ Reverse protected triggered control input to avoid linear control risks
- ▶ No radiated or conducted disturbances
- ▶ Touch protected housing IP20

SOM04060



Control voltage range	3.5-32VDC
Max. permanent output voltage	40VDC
Max. load current with heatsink	40ADC

Load voltage range	Load current range	Control input voltage range	In & case / Out Insulation	Connections	Dimensions (WxHxD)	Weight
5-40VDC	Up to 40A (with heatsink)	3.5-32VDC	2.5kV	Screw terminals	45 x 58.5 x 30	80g

Fig. 1


HIGH SIDE WIRING DIAGRAM  
(Load connected to “-“)

Fig. 2



LOW SIDE WIRING DIAGRAM  
(Load connected to “+“)

Fig. 3

INTERNAL DIAGRAM

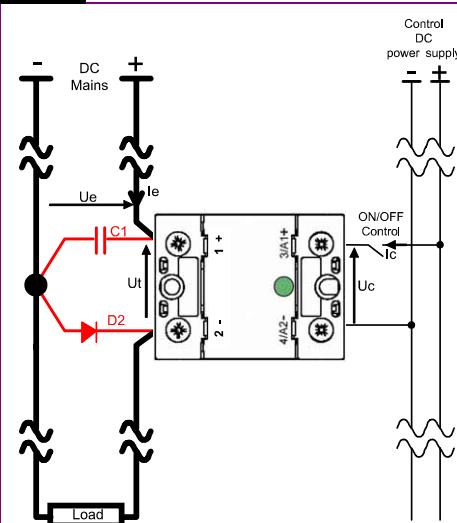

Proud to serve you

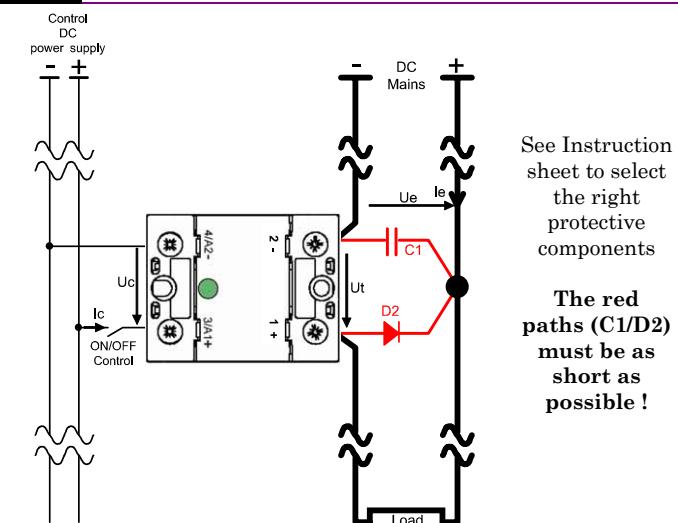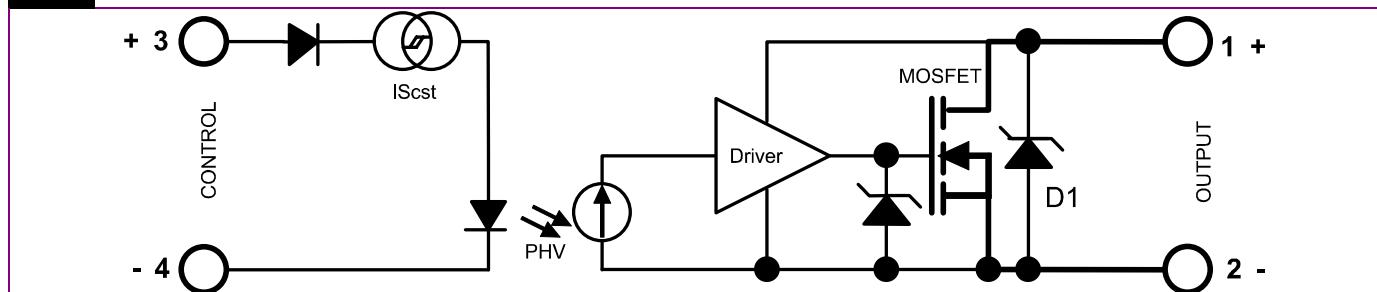

## PRELIMINARY DATA

Page 2/5 UK

## CONTROL INPUT CHARACTERISTICS

INPUT CIRCUIT	CHARACTERISTIC	LABEL	VALUE	INFO.
	Nom. Control voltage	Ucnom	12-24VDC	
	Min. Control current	Iemin	35mAADC	-100µA/°C
	Control voltage range	Ue	3.5 - 32VDC	typical ON=3.3V
	Control current consumption	Ic	32 - 35mAADC (for control voltage range)	See fig. 5
	Releasing control voltage	Ucoffmax	1VDC	typical OFF= 2.6V
	Max. reverse control voltage	-Uemax	32VDC	-Icmax<100µA
	Input impedance	Rin	Current limitation	See fig. 5

## POWER OUTPUT CHARACTERISTICS


POWER CIRCUIT	CHARACTERISTIC	LABEL	VALUE	INFO.
	Nominal voltage	Uenom	24VDC	
	Voltage range	Ut    Ue	5-40VDC	
	Non-repetitive peak voltage	Utp	60V	
	Overvoltage protection	D1	Transient voltage suppressor 39V (1500W/1ms)	
	Max reverse voltage drop (internal diode at OFF state)	-Ut	1.3V	@Ie=80A @Uc=0
	Maximum nominal currents	Ie max	Resistive    Motor 40A              Please contact us	See fig. 7 (limits)
	Non-repetitive peak overload current	Iepeak	320A	See fig. 8
	Min. load current	Iemin	5mA	
	Max. leakage current	Ielk max	3mA	@Utmax @Tjmax
	Max. on-state resistance	RDSon	18.2mOhms	@Iemax @Tjmax
	Typ. output capacitance	Cout	0.9nF	
	Junction/case thermal resistance per power element	Rthjc	1.2K/W	
	Built-in heatsink thermal resistance vertically mounted	Rthra	10K/W	@ΔTra=75°C
	Heatsink thermal time constant	Tthra	10 minutes	@ΔTra=60°C
	Control inputs/power outputs insulation voltage	Uimp	2.5kV	
	Inputs/case insulation voltage	Uimp	2.5kV	
	Outputs/case insulation voltage	Uimp	2.5kV	
	Isolation resistance	Rio	1GΩ	
	Isolation capacitance	Cio	<8pF	
	Maximum junction temperature	Tjmax	175°C	
	Storage ambient temperature	Tstg	-40->+100°C	
	Operating ambient temperature	Tamb	-25->+90°C	See fig. 7
	Max. case temperature	Tc	100°C	

## PROTECTION CHARACTERISTICS

PROTECTION	Leakage current (Ielk) vs DC voltage (Ut)	Absolute limits								
	<p>Graph showing Leakage current (Ielk) / Ie vs DC voltage (Ut). The curve starts at 0 for Ut &lt; Utmax (Uelk = Uemax) and increases linearly to 1 at Ut = Utp.</p> <table border="1"> <caption>Data points for Graph</caption> <thead> <tr> <th>Ut (V)</th> <th>Ielk / Ie</th> </tr> </thead> <tbody> <tr><td>40</td><td>0</td></tr> <tr><td>50</td><td>0.5</td></tr> <tr><td>60</td><td>1.0</td></tr> </tbody> </table>	Ut (V)	Ielk / Ie	40	0	50	0.5	60	1.0	<p><b>Absolute limits</b></p> <p><math>U_{to} &lt; U_{tp}</math></p> $t_{max} = \frac{0.75}{(U_{to} - U_{t\ max}) \times I_e}$ $P_{(protection)} = I_e \times t$ $\Rightarrow \frac{(U_{to} - U_{t\ max}) \times I_e \times t}{T} \leq 1$
Ut (V)	Ielk / Ie									
40	0									
50	0.5									
60	1.0									
	<p>Ielk : Leakage current of the relay Ie : User load nominal current Utp : Relay max. non repetitive peak voltage</p>	<p>Utmax : Max. nominal voltage of the relay Uto : Possible overvoltage above Utmax Utn = Ue : User DC power supply voltage</p> <p>t : Overvoltage duration T: Time between 2 overvoltage</p>								

**PRELIMINARY DATA****TIME CHARACTERISTICS**

Fig. 4

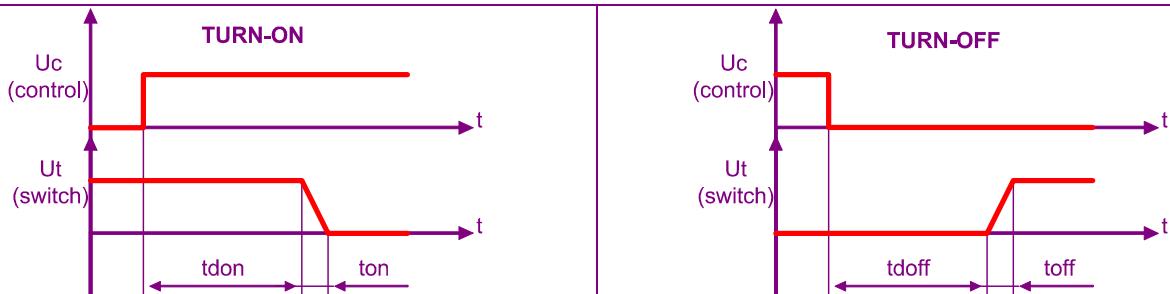**TIME DIAGRAMS****TIME CHARACT.**

CHARACTERISTIC	LABEL	VALUE	INFO.
Turn on time	ton	20µs	
Turn on delay	tdon	20µs	
Turn off time	toff	20µs	
Turn off delay	tdooff	20µs	
Max. On-Off frequency	F(on-off)	>1000Hz (for high frequency, take 2 x Ie to calculate the heatsink; the protections must be chosen carefully)	Refer to the instruction sheet

**GENERAL INFORMATION****CONNEX.**

Connections	Power	Control	
Screwdriver advised		POZIDRIV2	
Min and max tightening torque	2 N.m	1.2 N.m	
Insulated crimp terminals (round tabs, eyelet type)	M5	M4	

**MISC.**

Display	Green LED (indicates relay has switched ON)	
Housing	UL94V0	
Mounting	2 screws (M4x12mm ; tightening = 1.2N.m)	See mounting sheet
Noise level	None	
Weight	80g	

**STANDARDS****GENERAL**

Standards		IEC60947-1	
Protection level		IP20	
Protection against direct touch		Yes	
CE marking		Yes	
UL, cULUS and VDE approvals		Pending	

**E.M.C.  
IMMUNITY**

TYPE OF TEST	STANDARD	LEVEL	EFFECT
E.S.D. (Electrostatic discharges)	EN61000-4-2	Pending	?
Radiated electromagnetic fields	EN61000-4-3	Pending	?
Fast transients bursts	EN61000-4-4	Pending	?
Electric chocks	EN61000-4-5	Pending	?
Voltage drop	EN61000-4-11	-	

**E.M.C.  
EMISSION**

Radiated and conducted disturbances	NFEN55011	Pending	
-------------------------------------	-----------	---------	--



**PRELIMINARY DATA**

Page 4/5 UK

**CHARACTERISTIC CURVES**

Fig. 5

**INPUT CHARACTERISTIC**

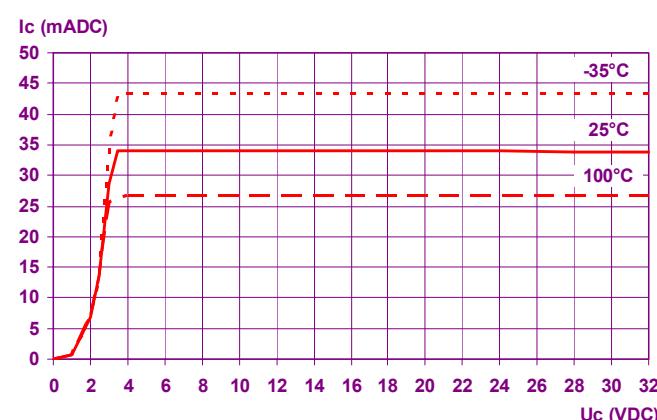


Fig. 6

**ON RESISTANCE VS JUNCTION TEMPERATURE**

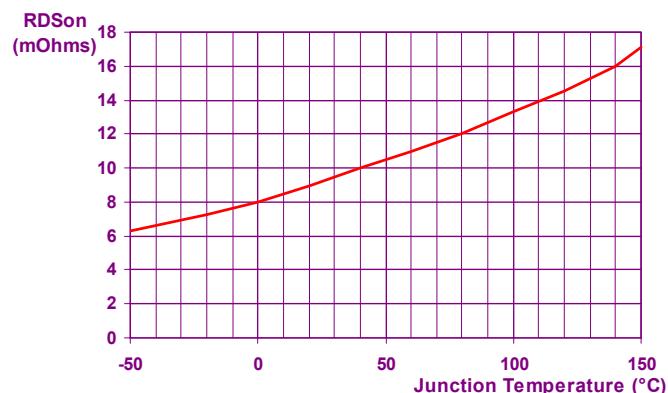




Fig. 7

**POWER DISSIPATED AND LOAD CURRENT LIMIT VS TEMPERATURE**



Fig. 8

**PEAK OVERLOAD CURRENT vs. PULSE DURATION CHARACTERISTIC**

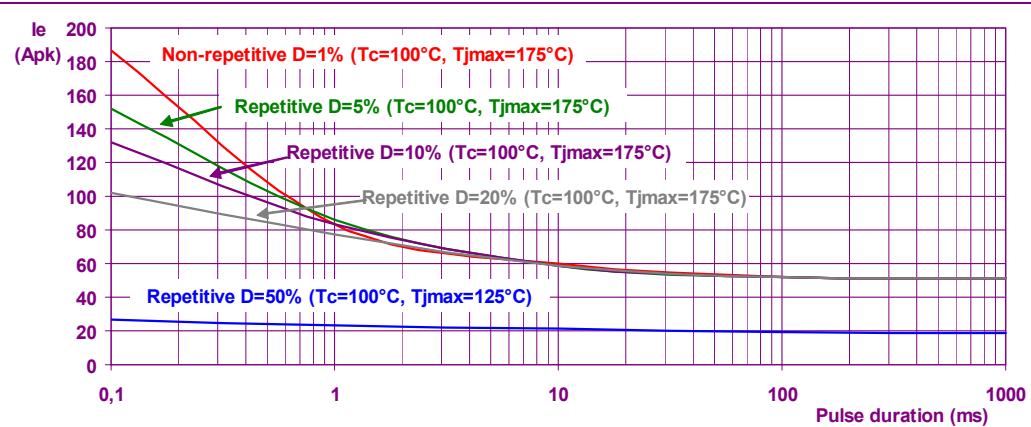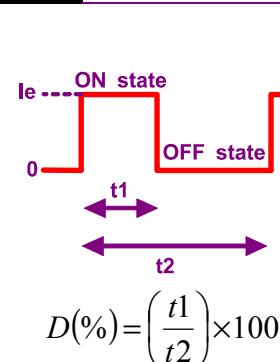

DIMENSIONS AND ACCESSORIES

Fig. 9

DIMENSIONS (mm)




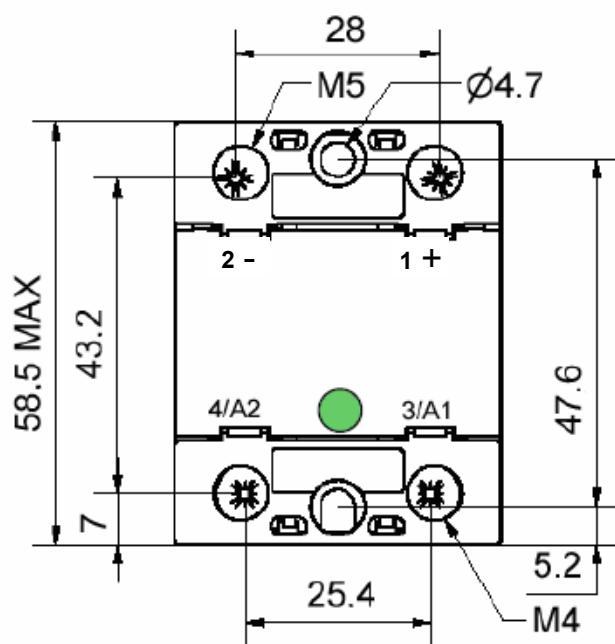


Fig.  
10

ACCESSORIES

FASTON : Please contact us

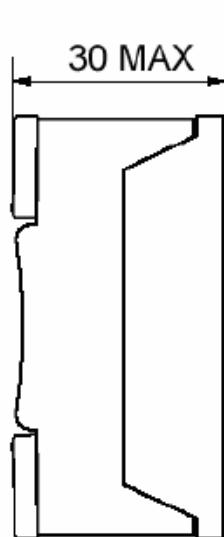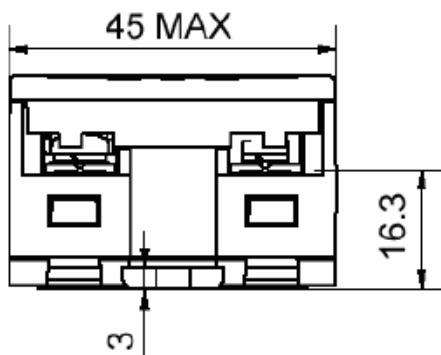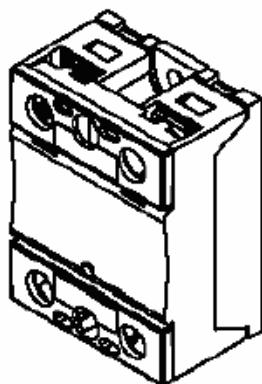