


## Glass Passivated Junction Fast Switching Rectifier

Reverse Voltage 50 to 600V  
Forward Current 1.0A

DO-204AL (DO-41)

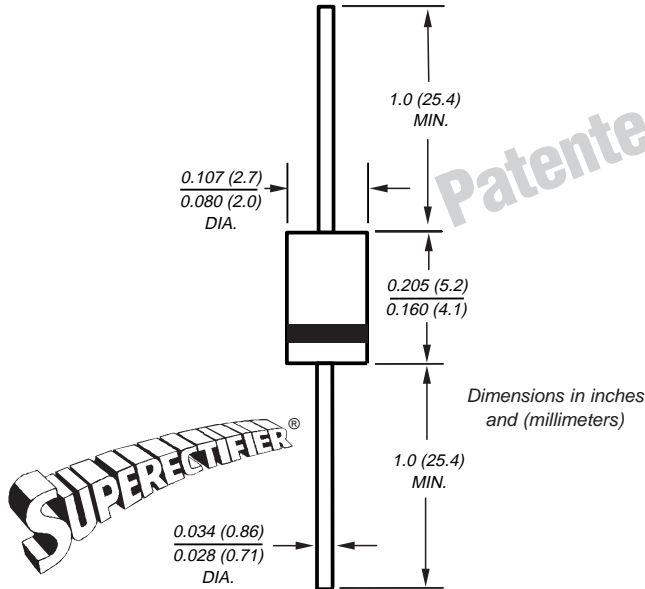

NOTE: Lead diameter is  $\frac{0.026 (0.66)}{0.023 (0.58)}$  for suffix "E" part numbers

Dimensions in inches and (millimeters)

\*Glass-plastic encapsulation technique is covered by

Patent No. 3,996,602, and brazed-lead assembly by Patent No. 3,930,306

### Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- High temperature metallurgically bonded construction
- Capable of meeting environmental standards of MIL-S-19500
- For use in high frequency rectifier circuits
- Fast switching for high efficiency
- Cavity-free glass passivated junction
- 1.0 Ampere operation at  $T_A=75^\circ\text{C}$  with no thermal runaway
- Typical  $I_R$  less than  $0.1\mu\text{A}$
- High temperature soldering guaranteed:  $300^\circ\text{C}/10$  seconds,  $0.375"$  (9.5mm) lead length, 5 lbs. (2.3kg) tension

### Mechanical Data

**Case:** JEDEC DO-204AL, molded plastic over glass body

**Terminals:** Plated axial leads, solderable per

MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.012 oz., 0.34 g

## Maximum Ratings & Thermal Characteristics Ratings at $25^\circ\text{C}$ ambient temperature unless otherwise specified.

Parameter	Symbol	1N4933GP	1N4934GP	1N4935GP	1N4936GP	1N4937GP	Unit
*Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	V
*Maximum RMS voltage	$V_{RMS}$	35	70	145	280	420	V
*Maximum DC blocking voltage	$V_{DC}$	50	100	200	400	600	V
*Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=75^\circ\text{C}$	$I_{F(AV)}$	1.0					A
*Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	30					A
Typical thermal resistance <sup>(1)</sup>	$R_{\theta JA}$	55					$^\circ\text{C}/\text{W}$
*Operating junction and storage temperature range	$T_J, T_{STG}$	-65 to +175					$^\circ\text{C}$

## Electrical Characteristics Ratings at $25^\circ\text{C}$ ambient temperature unless otherwise specified.

*Maximum instantaneous forward voltage at 1.0A	$V_F$	1.2					V
*Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=125^\circ\text{C}$	$I_R$	5.0 100					$\mu\text{A}$
*Maximum reverse recovery time at $I_F=1.0\text{A}, V_R=30\text{V}$	$t_{rr}$	200					ns
Typical junction capacitance at 4.0V, 1MHz	$C_J$	15					pF

### Notes:


(1) Thermal resistance from junction to ambient, and from junction to lead at  $0.375"$  (9.5mm) lead length, P.C.B. mounted

\*JEDEC registered values


Vishay Semiconductors  
formerly General Semiconductor

## Ratings and Characteristic Curves ( $T_A = 25^\circ\text{C}$ unless otherwise noted)


**Fig. 1 — Forward Current Derating Curves**

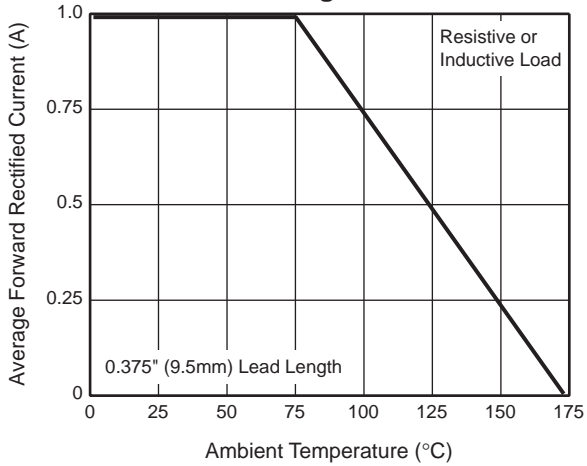


**Fig. 2 — Maximum Non-Repetitive Peak Forward Surge Current**

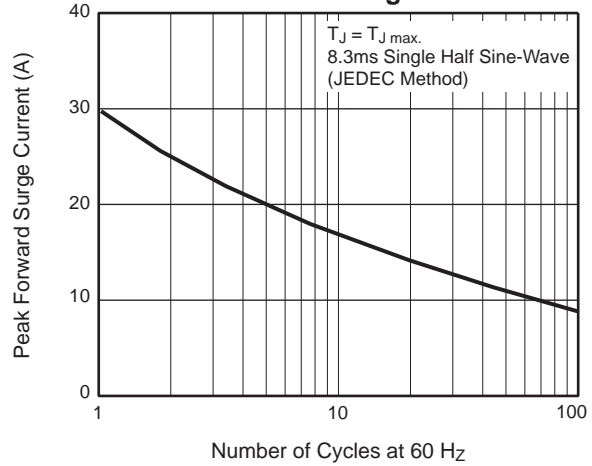


**Fig. 3 — Typical Instantaneous Forward Characteristics**

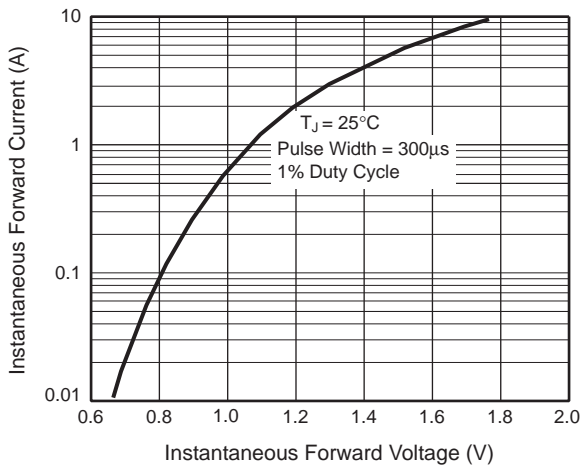

**Fig. 4 — Typical Reverse Characteristics**

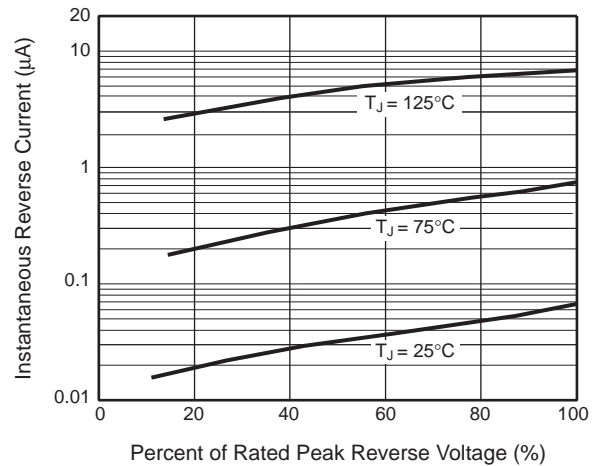

**Fig. 5 — Typical Junction Capacitance**

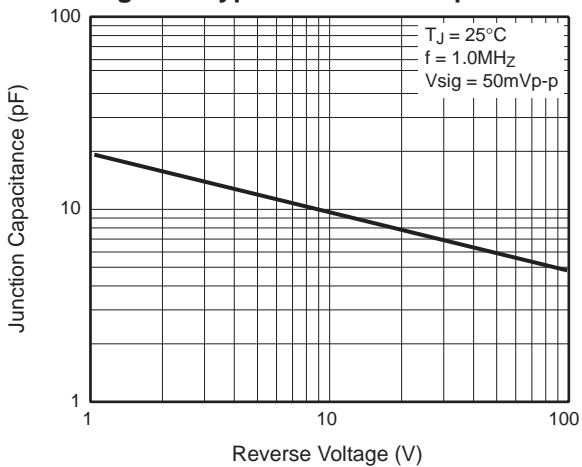

**Fig. 6 — Typical Transient Thermal Impedance**

