

PRODUCT SPECIFICATION

DATE:05/04/2011


COSMO ELECTRONICS CORPORATION	Photocoupler: KTLP250H	No.62P32001	REV
		SHEET 1 OF 8	1

※THE KTLP250 BUILT- IN DIRECT DRIVE CIRCUIT FOR GATE DRIVING CIRCUIT OF IGBT OR POWER MOSFET.

• Feature:

- 1.This unit is 8.lead DIP package.
- 2.Input threshold current: IF=5mA(max.)
- 3.Supply current (I_{CC}): 11mA(max.)
- 4.Supply voltage (V_{CC}): 10 – 35V
- 5.Output current (I_O): ±1.5A (max.)
- 6.Switching time (t_{pLH}/t_{pHL}): 0.5μs(max.)
- 7.Isolation voltage: 2500Vrms(min.)

■ Functional Diagram

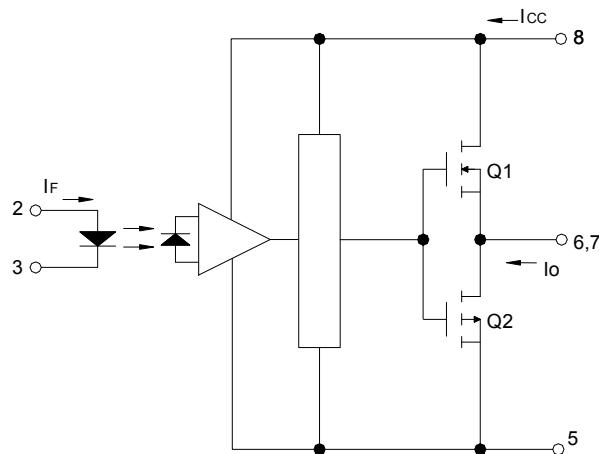

• Applications:

- 1.Transistor Inverter
- 2.Inverter For Air Conditionor
- 3.IGBT Gate Drive
- 4.Power MOS FET Gate Drive

■ Truth Table

LED	OUTPUT	Q1	Q2
ON	HIGH LEVEL	ON	OFF
OFF	LOW LEVEL	OFF	ON

* The use of a 0.1μF bypass capacitor must be connected between pins 8 and 5 is recommended.

PRODUCT SPECIFICATION

DATE:05/04/2011


cosmo
ELECTRONICS CORPORATION

Photocoupler:
KTLP250H


No.62P32001
SHEET 2 OF 8

REV
1

1. Output Dimensions : Unit (mm)

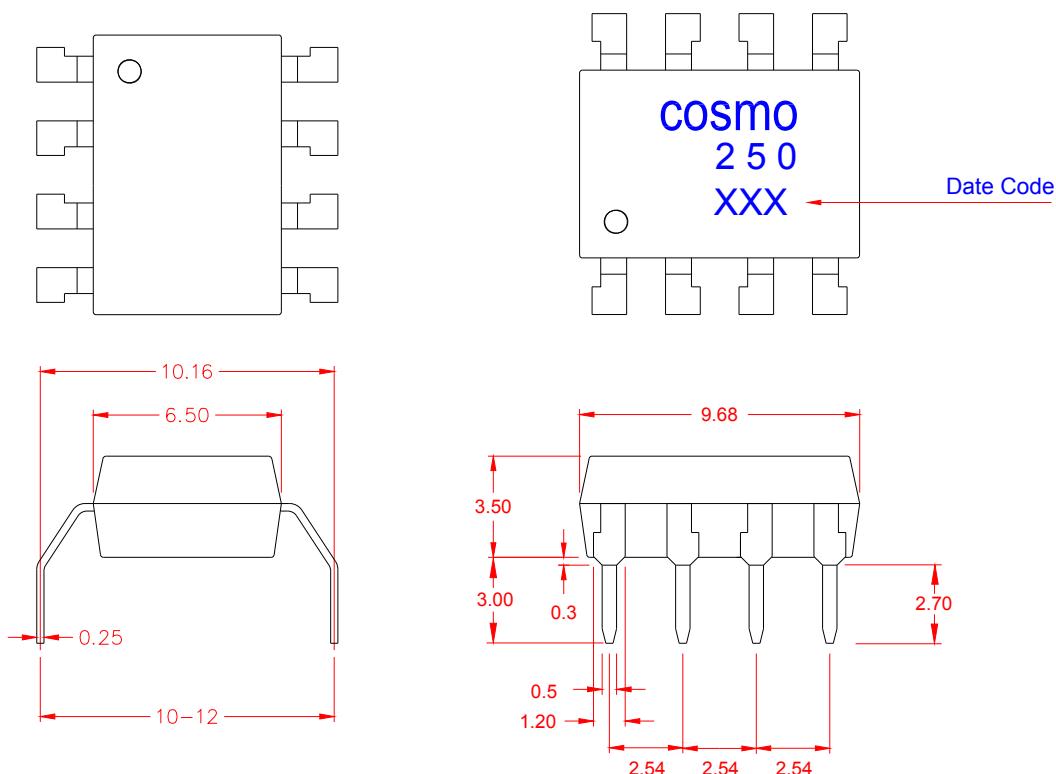

2. KTLP250 Top View:

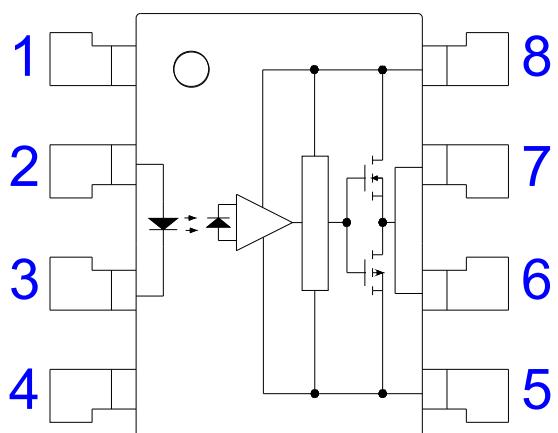

Pin 1:	N.C.
Pin 2:	Anode
Pin 3:	Cathode
Pin 4:	N.C.
Pin 5:	GND
Pin 6:	Vo (Voltage Output)
Pin 7:	Vo (Voltage Output)
Pin 8:	Vcc

PRODUCT SPECIFICATION

DATE:05/04/2011

COSMO ELECTRONICS CORPORATION	Photocoupler: KTLP250H	No.62P32001	REV
		SHEET 3 OF 8	1

Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter		Symbol	Rating	Unit
Input	Forward Current	I_F	20	mA
	Forward Current Derating($T_a \geq 70^\circ\text{C}$)	$\Delta I_F / \Delta T_a$	-0.36	mA/ $^\circ\text{C}$
	Peak Transient Forward Current (*Note 1)	I_{FPT}	1	A
	Reverse Voltage	V_R	5	V
	Junction Temperature	T_j	125	$^\circ\text{C}$
Output	"H"Peak Output Current($P_w \leq 2.5\mu\text{s}, f \leq 15\text{kHz}$) (*Note 2)	I_{OPH}	-1.5	A
	"L"Peak Output Current($P_w \leq 2.5\mu\text{s}, f \leq 15\text{kHz}$) (*Note 2)	I_{OPL}	+1.5	A
	Output Voltage ($T_a \leq 70^\circ\text{C}$)	V_o	35	V
			24	
	Supply Voltage ($T_a \leq 70^\circ\text{C}$)	V_{CC}	35	V
			24	
	Output Voltage Derating ($T_a \geq 70^\circ\text{C}$)	$\Delta V_o / \Delta T_a$	-0.73	V / $^\circ\text{C}$
	Supply Voltage Derating ($T_a \geq 70^\circ\text{C}$)	$\Delta V_{CC} / \Delta T_a$	-0.73	V / $^\circ\text{C}$
	Junction Temperature	T_j	125	$^\circ\text{C}$
	Operating Frequency (*Note 3)	f	25	kHz
Operating Temperature Range		T_{opr}	-20~85	$^\circ\text{C}$
Storage Temperature Range		T_{stg}	-55~125	$^\circ\text{C}$
Lead Soldering Temperature(10s) (*Note 4)		T_{sol}	260	$^\circ\text{C}$
Isolation Voltage (AC,1min.,R.H $\leq 60\%$) (*Note 5)		BVs	2500	Vrms

*Note1:Pulse width $P_w \leq 1\mu\text{s}, 300\text{pps}$.

*Note2:Exponential waveform.

*Note3:Exponential waveform, $IOPH \leq -1.0\text{A } (\leq 2.5\mu\text{s}), IOPL \leq +1.0\text{A } (\leq 2.5\mu\text{s})$.

*Note4:It IS 2 mm or more from a lead root.

*Note5:Device considerd a two terminal device: Pin1,2,3 and 4 shorted together,
and pins 5,6,7 and 8 shorted together.

PRODUCT SPECIFICATION

DATE:05/04/2011

COSMO ELECTRONICS CORPORATION	Photocoupler: KTLP250H	No.62P32001		REV 1
		SHEET 4 OF 8		

■ Electrical Characteristics (Ta = -20~70°C,unless otherwise specified)

Parameter	Symbol	Test Circuit	Test Condition	Min.	Typ.	Max.	Unit	
Input forward voltage	V _F	—	IF=10mA,Ta=25°C	—	1.6	1.8	V	
Temperature coefficient of forward voltage	△V _F /△Ta	—	IF=10mA	—	-2.0	—	mV/°C	
Input reverse current	I _R	—	VR=5V,Ta=25°C	—	—	10	μA	
Input capacitance	C _T	—	V=0,f=1MHz,Ta=25°C	—	45	250	pF	
Output current	“H” level	I _{OPH}	3	VCC=30V (*A)	IF=10mA Vb=4V	-0.5	-1.5	A
	“L” level	I _{OPL}	2		IF=0 Va=2.5V	0.5	2	
Output voltage	“H” level	V _{OH}	4	VCC1=15V,VEE1=-15V RL=200Ω,IF=5mA		11	12.8	V
	“L” level	V _{OL}	5	VCC1=15V,VEE1=-15V RL=200Ω, VF=0.8V		—	-14.2	
Supply current	“H” level	I _{CCH}	—	VCC=30V,IF=10mA, Ta=25°C	—	7	—	mA
				VCC=30V,IF=10mA	—	—	11	
	“L” level	I _{CCL}	—	VCC=30V,IF=0mA, Ta=25°C	—	7.5	—	
				VCC=30V,IF=0mA	—	—	11	
Threshold input current	“Output L→H”	I _{FLH}	—	VCC1=15V,VEE1=-15V, RL=200Ω,VO>0V		—	1.2	5 mA
Threshold input voltage	“Output H→L”	V _{FHL}	—	VCC1=15V,VEE1=-15V, RL=200Ω,VO<0V		0.8	—	V
Supply voltage	V _{CC}	—		10	—	35	V	
Capacitance (input-output)	C _S	—	V _s =0,f=1MHz,Ta=25°C	—	1.0	2.0	pF	
Resistance (input-output)	R _S	—	V _s =500V,Ta=25°C, R.H.≤60%	1*10 ¹²	10 ¹⁴	—	Ω	

*All typical values are at Ta=25°C (*A):Duration of I_O time ≤ 50μs

PRODUCT SPECIFICATION

DATE:05/04/2011

COSMO ELECTRONICS CORPORATION	Photocoupler: KTLP250H	No.62P32001	REV
SHEET 5 OF 8			1

■ **Switching Characteristics (Ta = -20~70°C,unless otherwise specified)**

Parameter	Symbol	Test Circuit	Test Condition	Min.	Typ.	Max.	Unit
Propagation delay time "L→H"	t_{PLH}	6	IF=8mA (Note8) VCC1=+15V,VEE1=-15V Rg=20Ω,Cg=10nF	—	0.15	0.5	μs
"H→L"	t_{PHL}			—	0.15	0.5	
Output rise time	t_r			—	—	—	
Output fall time	t_f			—	—	—	
Common mode transient immunity at high level output	C_{MH}	7	$V_{CM}=600V,I_F=8mA$ $V_{CC}=30V,Ta=25^{\circ}C$	-5	—	—	KV / μs
Common mode transient immunity at low level output	C_{ML}	7	$V_{CM}=600V,I_F=0$ $V_{CC}=30V,Ta=25^{\circ}C$	5	—	—	KV / μs

* All typical values are at Ta=25°C.

*Note 8: Input signal rise time (fall time) < 0.5μs.

PRODUCT SPECIFICATION

DATE:05/04/2011

COSMO
ELECTRONICS CORPORATION

Photocoupler:
KTLP250H

No.62P32001
SHEET 6 OF 8

REV
1

■ Test Circuit:

Fig.1 : Top View

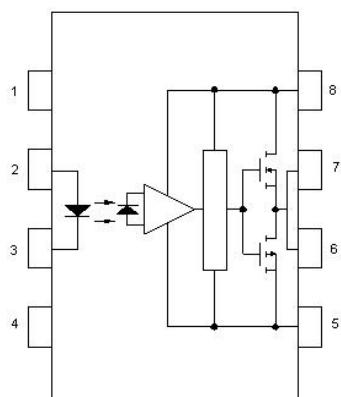


Fig.2 : I_{OPL} Measure.

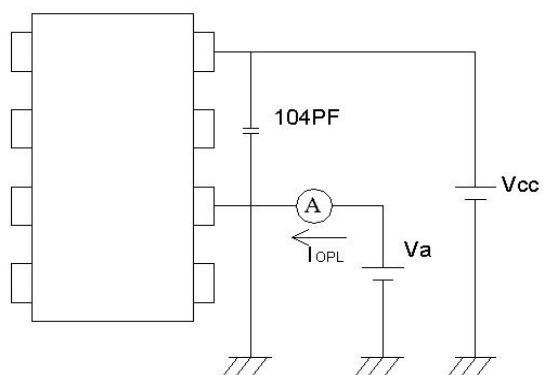


Fig.3 : I_{OPH} Measure.

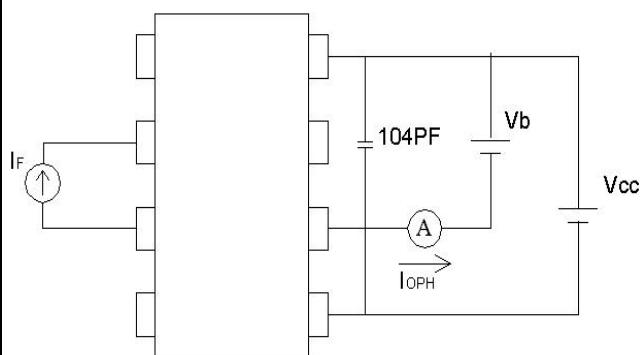


Fig.4 : V_{OH} Measure.


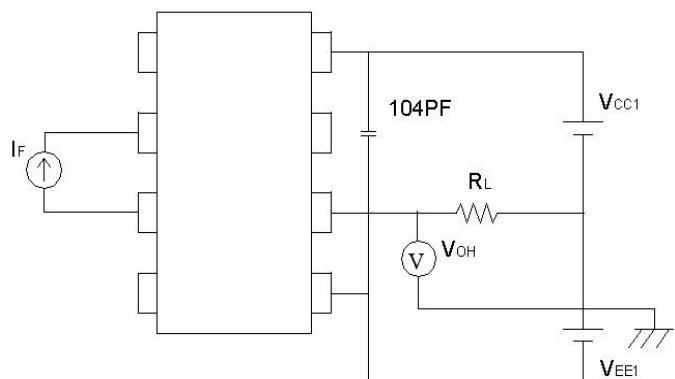


Fig.5 : V_{OL} Measure.

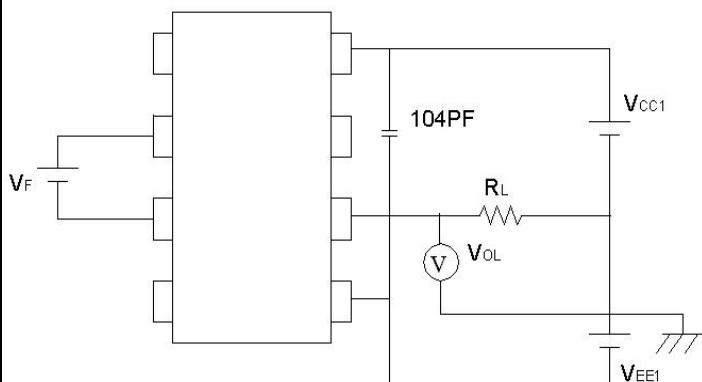

PRODUCT SPECIFICATION

DATE:05/04/2011

COSMO
ELECTRONICS CORPORATION

Photocoupler:
KTLP250H

No.62P32001
SHEET 7 OF 8

REV
1

Fig.6: t_{PLH} , t_{PHL} , t_r , t_f Measure.


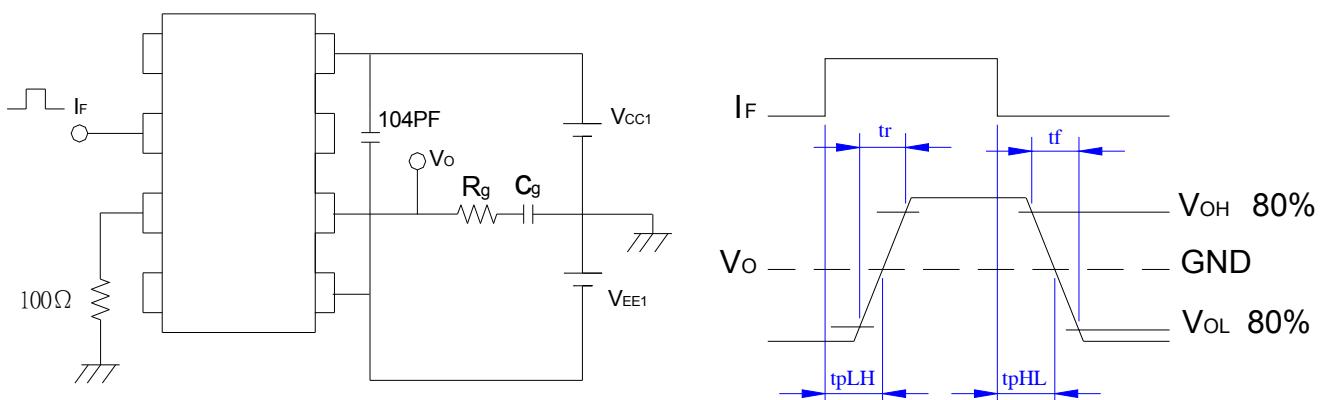


Fig.7: C_{MH} , C_{ML} .

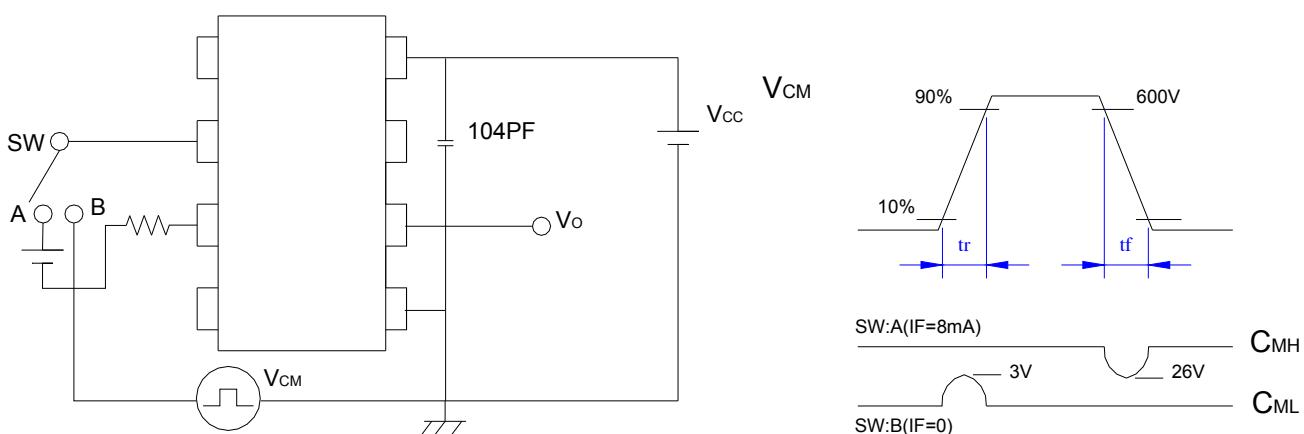

$$C_{ML} = \frac{480(V)}{t_r(\mu s)} \quad ; \quad C_{MH} = \frac{480(V)}{t_f(\mu s)}$$

*CML(CMH) is the maximum rate of rise (fall) of the common mode voltage that can be sustained with the output voltage in the low (high) state.

PRODUCT SPECIFICATION

DATE:05/04/2011

COSMO ELECTRONICS CORPORATION	Photocoupler: KTLP250H	No.62P32001	REV
SHEET 8 OF 8			1

Fig.8:

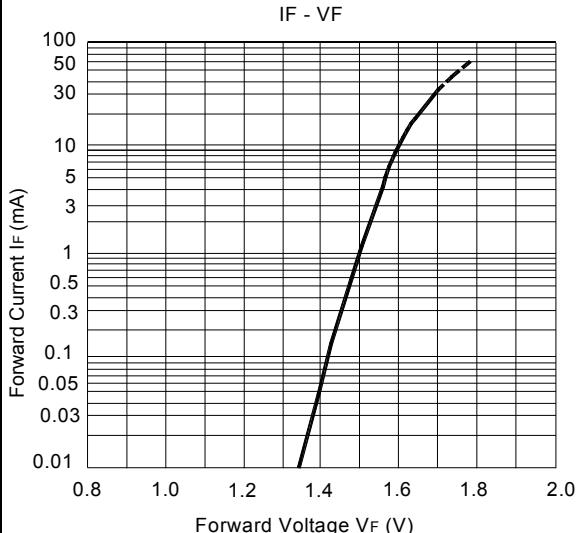


Fig.9 :

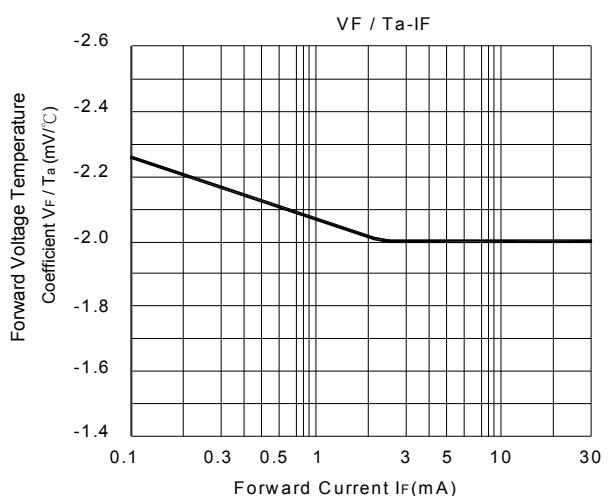


Fig.10 :

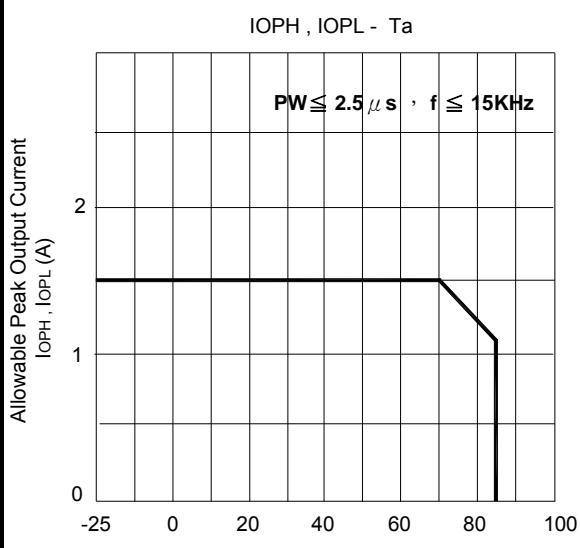


Fig.11:

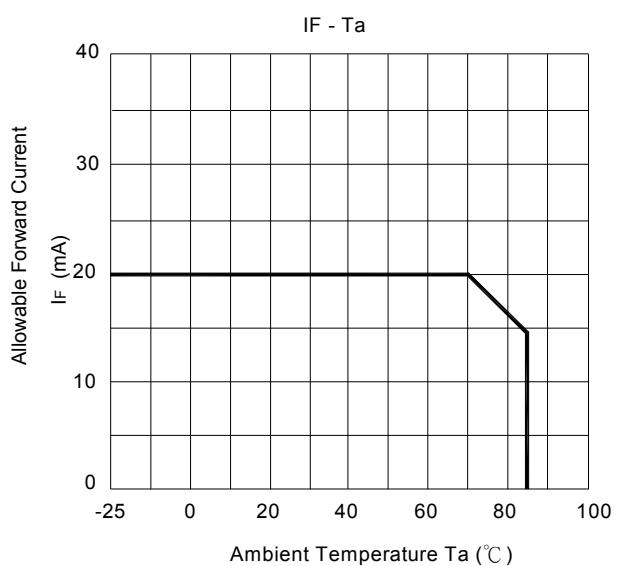


Fig.12:

