



1. Dimensions:

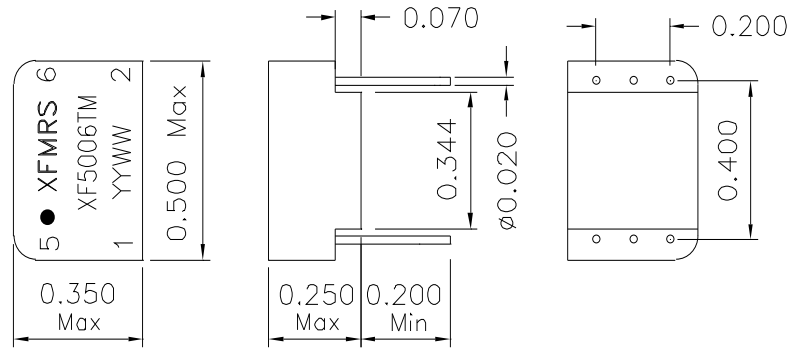

2. Schematic:

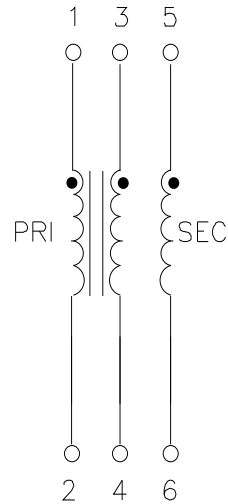

3. Electrical Specifications: @25°C

Isolation Voltage: 3750Vrms (PRI to each SEC)

Turns Ratio: 1:1:1 $\pm 3\%$

PRI OCL: 500uH Minimum @10KHz 100mV

PRI LL: 0.40uH Maximum @100KHz 100mV (SEC Shorted)

Cw/w: (1-5) 32pF Maximum @100KHz 100mV

PRI DCR: 1.3 Ohms Maximum

SEC DCR: 1.3 Ohms Maximum

Rise Time: 5.3nS Max

ET-Constant: 8.5V/uS Min

DOC. REV: A/1

XFMS Inc	Title: TRANSFORMER	
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ± 0.010 Dimensions in Inch	P/N: XF5006TM REV. A DWN. 李灌儿 Jun-4-99 CHK. 孙小波 Jun-4-99 APP. Joe Huff Jun-4-99