

KR Electronics

General Description


KR 2806 is a 85 MHz lowpass filter. The filter has a minimum 2 dB bandwidth of 85 MHz. Other center frequencies and bandwidths available. Please consult the factory.

Features


- Sharp Transition to Stopband
- >30 dB Stopband
- 50 Ω Source and Load
- SMA Connectors

Typical Performance

Passband Amplitude & VSWR
(1 dB/div & 0.20/div)

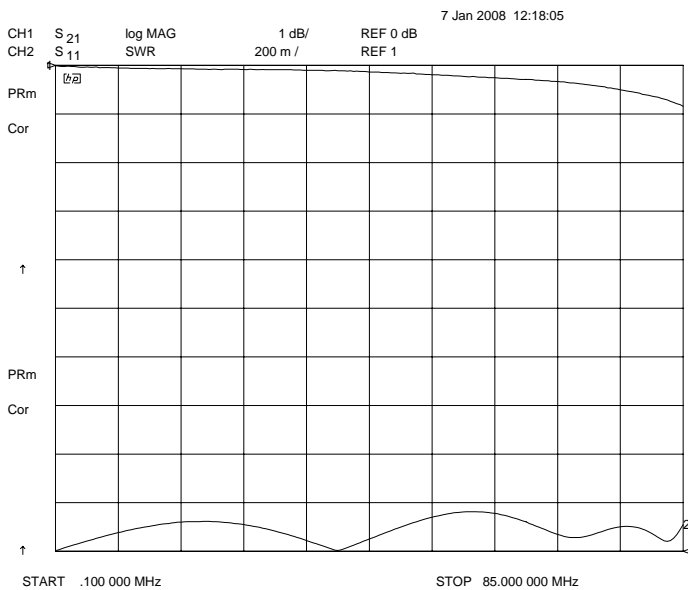

Overall Response
(10 dB/div)

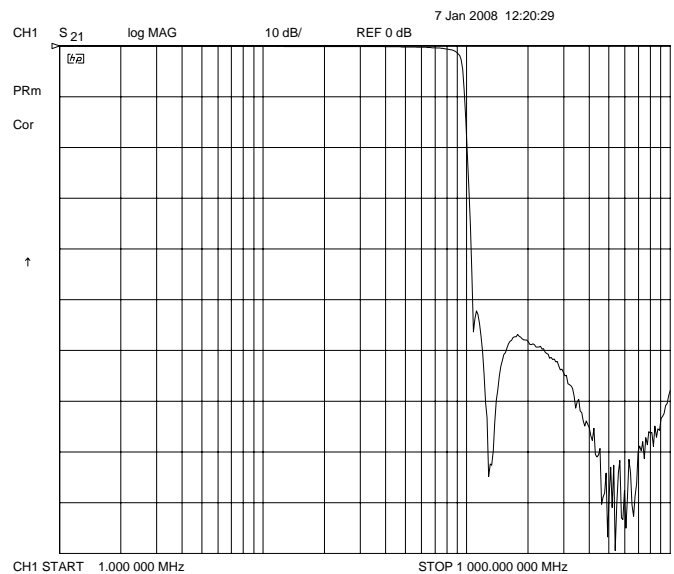

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR 2806 Lowpass

Specifications

Parameter	Specification
Filter type	Lowpass
End of Passband <2 dB	85 MHz
Start of Stopband >30 dB (>50 dB typical)	108 MHz
Source and Load	50 Ω

Physical Dimensions

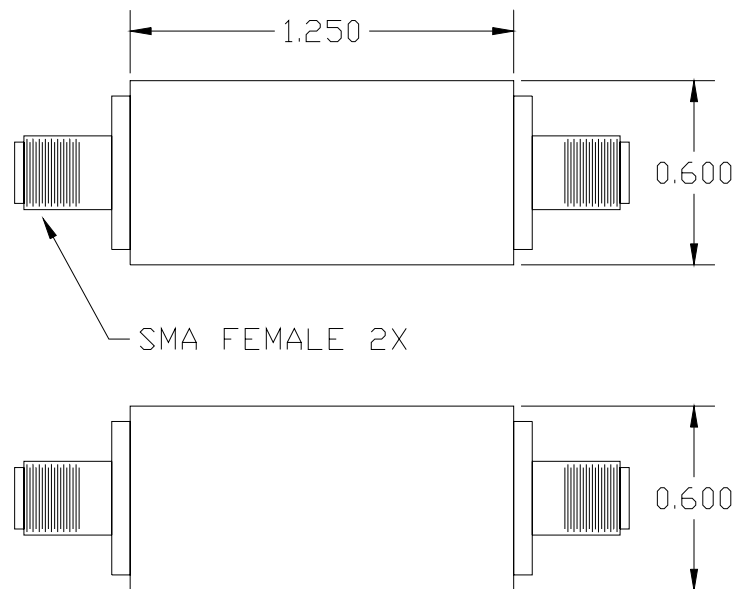

Dimensions in inches
Metal Case
Also available in surface mount package