


FUSEHOLDER

- 1 - 5 Pole terminal strip with 5x20mm fuse holder to IEC257
- Anti - rotation spigot
- IP20 finger protection
- Cable entry 4mm² (2.5mm² with wire protector)
- Wire protector on fuse pole as standard
- Standard 3 to 5 pole with earth screw, without wire protection
- Meets creepage and clearance requirements of IEC

FUSED TERMINAL BLOCK

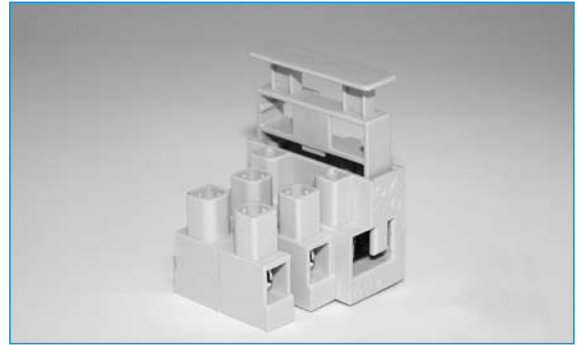

SPECIFICATION

Voltage rating: fuse holder 250VAC, terminal 450VAC

Current rating: fuse holder 13A, terminal 13A

Working

Temperature: 125°C (short period: 170°C)

Moulding: UL94-V0 flame retardant polyamide 66

Terminal: Brass Nickel plated


Fuse clip: Phosphor bronze

Fuse holder: 5 x 20mm

Screws: M3 7 microns zinc, colour passivated and tropicalised

Approvals: IMQ, Semko, Fimko UL, VDE, CSA

OUTLINE DRAWING

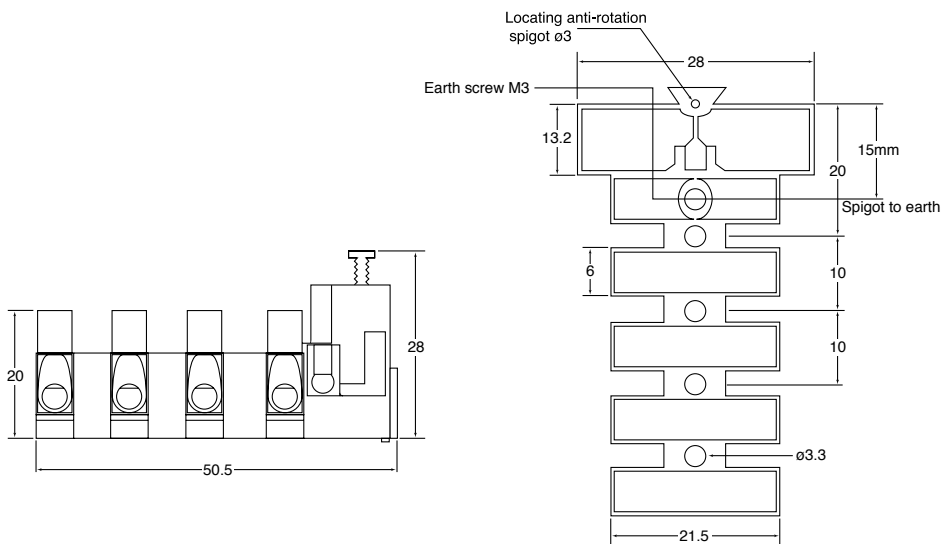

ORDERING INFORMATION

DBC	FH	1	/3
Dubilier Connectors	Series	Style	N° of Ways
	Fuse Holder	1	3=3way 4=4way 5=5way