

# MAZ7000 Series

## Silicon planar type

For stabilization of power supply

### ■ Features


- Large power dissipation  $P_{tot}$  (800 mW)
- Allowing to supply with the radial taping

### ■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Repetitive peak forward current	$I_{FRM}$	200	mA
Total power dissipation*1	$P_{tot}$	800	W
Non-repetitive reverse surge power dissipation*2	$P_{ZSM}$	60	W
Junction temperature	$T_j$	200	$^\circ\text{C}$
Storage temperature	$T_{stg}$	-55 to +200	$^\circ\text{C}$

Note) \*1 :  $P_{tot} = 800$  mW achieved with a printed-circuit board

\*2 :  $t = 100$   $\mu\text{s}$ ,  $T_j = 150^\circ\text{C}$

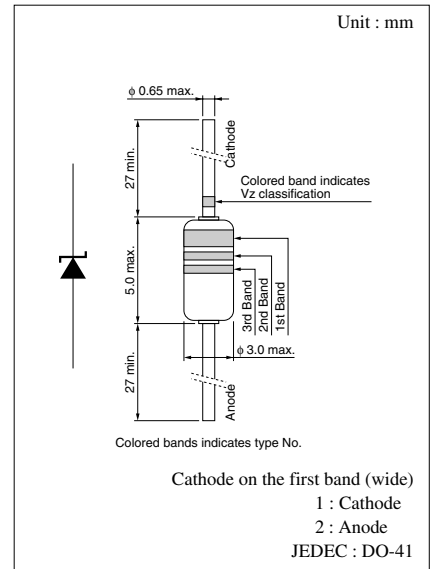

### • Color indication of $V_Z$ rank classification

A rank	B rank
Blue	Red

### ■ Common Electrical Characteristics $T_a = 25^\circ\text{C}$ \*1

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Forward voltage	$V_F$	$I_F = 200$ mA			1.0	V
Zener voltage*2	$V_Z$	$I_Z$ ..... Specified value				V
Operating resistance	$R_Z$	$I_Z$ ..... Specified value				$\Omega$
Reverse current	$I_R$	$V_R$ ..... Specified value				$\mu\text{A}$
Temperature coefficient of zener voltage*3	$S_Z$	$I_Z$ ..... Specified value				mV/ $^\circ\text{C}$
Terminal capacitance	$C_t$	$V_R$ ..... Specified value				pF

Refer to the list of the electrical characteristics within part numbers

Note) 1. Rated input/output frequency: 5 MHz

2. \*1 : The  $V_Z$  value is for the temperature of  $25^\circ\text{C}$ . In other cases, carry out the temperature compensation.

\*2 : Guaranteed at 20 ms after power application.

\*3 :  $T_j = 25^\circ\text{C}$  to  $150^\circ\text{C}$

■ Electrical characteristics within part numbers  $T_a = 25^\circ\text{C}$

Part Number	Zener voltage			Reverse current		Operating resistance		Temperature coefficient of zener voltage		Terminal capacitance	Marking Symbol (Color indication)		
	Min (V)	Max (V)	$I_Z$ (mA)	Max ( $\mu\text{A}$ )	$V_R$ (V)	Max ( $\Omega$ )	$I_Z$ (mA)	Typ (mV/ $^\circ\text{C}$ )	$I_Z$ (mA)	$C_t$ (pF) ( $V_R = 0\text{ V}$ ) $f = 1\text{ MHz}$ Typ			
											1st.	2nd.	3rd.
MAZ7051	4.8	5.4	40	20	1	10	40	0	40	200	Green	Brown	Brown
MAZ7051-A	4.8	5.15											
MAZ7051-B	5.05	5.4											
MAZ7056	5.2	6.0	40	20	2	8	40	1.5	40	180	Green	Blue	Blue
MAZ7056-A	5.3	5.7											
MAZ7056-B	5.6	6.0											
MAZ7062	5.8	6.6	40	20	3	6	40	2.4	40	330	Blue	Red	Red
MAZ7062-A	5.8	6.2											
MAZ7062-B	6.1	6.5											
MAZ7068	6.4	7.2	40	10	3	6	40	3.1	40	280	Blue	Gray	Gray
MAZ7068-A	6.4	6.8											
MAZ7068-B	6.7	7.1											
MAZ7075	7.0	7.9	40	10	3	5	40	3.8	40	250	Purple	Green	Green
MAZ7075-A	7.0	7.45											
MAZ7075-B	7.35	7.8											
MAZ7082	7.7	8.7	40	10	4	5	40	4.5	40	230	Gray	Red	Red
MAZ7082-A	7.7	8.2											
MAZ7082-B	8.1	8.6											
MAZ7091	8.5	9.6	40	10	5	6	40	5.4	40	220	White	Brown	Brown
MAZ7091-A	8.5	9.05											
MAZ7091-B	8.95	9.5											
MAZ7100	9.4	10.6	40	10	7	6	40	6.3	40	220	Brown	Black	—
MAZ7100-A	9.4	10.0											
MAZ7100-B	9.9	10.5											
MAZ7110	10.4	11.6	20	5	7	8	20	7.4	20	160	Brown	Brown	—
MAZ7110-A	10.4	11.05											
MAZ7110-B	10.85	11.5											
MAZ7120	11.4	12.7	20	5	8	8	20	8.4	20	160	Brown	Red	—
MAZ7120-A	11.4	12.1											
MAZ7120-B	11.9	12.6											
MAZ7130	12.4	14.1	20	5	9	10	20	9.4	20	155	Brown	Orange	—
MAZ7130-A	12.4	13.25											
MAZ7130-B	13.15	14.0											
MAZ7150	13.8	15.6	20	5	10	12	20	11.4	20	150	Brown	Green	—
MAZ7150-A	13.8	14.7											
MAZ7150-B	14.5	15.4											
MAZ7160	15.3	17.1	20	5	11	12	20	12.5	20	135	Brown	Blue	—
MAZ7160-A	15.3	16.3											
MAZ7160-B	16.1	17.1											
MAZ7180	16.8	19.1	20	5	12	15	20	14.5	20	110	Brown	Gray	—
MAZ7180-A	16.8	18.0											
MAZ7180-B	17.8	19.0											
MAZ7200	18.8	21.2	20	5	14	15	20	16.6	20	100	Red	Black	—
MAZ7200-A	18.8	20.0											
MAZ7200-B	19.8	21.0											

■ Electrical characteristics within part numbers (continued)  $T_a = 25^\circ\text{C}$

Part Number	Zener voltage		$I_Z$ (mA)	Reverse current		Operating resistance		Temperature coefficient of zener voltage		Terminal capacitance $C_t$ (pF) ( $V_R = 0$ V) $f = 1$ MHz Typ	Marking Symbol (Color indication)		
	Min (V)	Max (V)		Max ( $\mu\text{A}$ )	$V_R$ (V)	Max ( $\Omega$ )	$I_Z$ (mA)	Typ (mV/ $^\circ\text{C}$ )	$I_Z$ (mA)		1st.	2nd.	3rd.
	$V_Z$		$I_R$		$R_Z$		$S_Z$						
MAZ7220	20.8	23.3	10	5	15	20	10	18.6	10	95	Red	Red	—
MAZ7220-A	20.8	22.15											
MAZ7220-B	21.85	23.2											
MAZ7240	22.8	25.6	10	5	16	20	10	20.7	10	90	Red	Yellow	—
MAZ7240-A	22.8	24.35											
MAZ7240-B	24.15	25.6											
MAZ7270	25.1	28.9	10	2	18	25	10	23.8	10	85	Red	Purple	—
MAZ7270-A	25.1	27.0											
MAZ7270-B	26.9	28.9											
MAZ7300	28.0	32.0	10	2	20	25	10	26.9	10	80	Orange	Black	—
MAZ7300-A	28.0	30.1											
MAZ7300-B	29.9	32.0											
MAZ7330	31.0	35.0	10	2	22	30	10	30.0	10	75	Orange	Orange	—
MAZ7330-A	31.0	33.14											
MAZ7330-B	32.86	35.0											
MAZ7360	34.0	38.0	10	2	24	30	10	33.4	10	70	Orange	Blue	—
MAZ7360-A	34.0	36.16											
MAZ7360-B	35.84	38.0											
MAZ7390	37.0	41.0	10	5	26	50	10	36.3	10	65	Orange	White	—
MAZ7430	40.0	46.0	10	5	29	50	10	41.1	10	60	Yellow	Orange	—
MAZ7470	44.0	50.0	10	5	31	50	10	44.9	10	55	Yellow	Purple	—
MAZ7510	48.0	54.0	10	5	33	50	10	48.6	10	50	Green	Brown	—
MAZ7560	52.0	60.0	10	5	35	50	10	54.9	10	45	Green	Blue	—

