



ST19RF08

Smartcard MCU With 8 KBytes EEPROM

DATA BRIEF

PRODUCT FEATURES

- ENHANCED 8 BIT CPU WITH EXTENDED ADDRESSING MODES
- 32 KBYTES OF USER ROM WITH PARTITIONING
- SYSTEM ROM FOR LIBRARIES
- 960 BYTES OF USER RAM WITH PARTITIONING
- 8 KBYTES OF USER EEPROM WITH PARTITIONING
 - Highly reliable CMOS EEPROM submicron technology
 - 10 years data retention
 - 100,000 Erase/Write cycles endurance
 - Separate Write and Erase cycles for fast "1" programming
 - 1 to bytes Erase or Program in 1 ms
- SECURITY FIREWALLS FOR MEMORIES
- VERY HIGH SECURITY FEATURES INCLUDING EEPROM FLASH PROGRAM AND CLOCK MANAGEMENT
- 8 BIT TIMER WITH INTERRUPT CAPABILITY
- 2 SERIAL ACCESS, ISO 7816-3 COMPATIBLE
- 3V ± 10% or 5V ± 10% SUPPLY VOLTAGE
- POWER SAVING STANDBY MODE
- CONTACT ASSIGNMENT COMPATIBLE ISO 7816-2
- UNIQUE SERIAL NUMBER ON EACH DIE
- ESD PROTECTION GREATER THAN 5000V


CONTACTLESS SPECIFIC FEATURES:

- ISO14443 TYPE B COMPLIANT
- 13.56 MHz CARRIER FREQUENCY
- DESIGNED TO SUPPORT HIGH SPEED DATA TRANSFER UP TO 424 Kbps
- 10% AMPLITUDE MODULATION RECEPTION (READER TO CARD)
- BPSK-NRZ-L LOAD MODULATION (CARD TO READER)
- 3V OPERATION

CONTACT SPECIFIC FEATURES

- 2 SERIAL ACCESS, ISO 7816-3 COMPATIBLE
- 3V ± 10% or 5V ± 10% SUPPLY VOLTAGE
- POWER SAVING STANDBY MODE
- CONTACT ASSIGNMENT COMPATIBLE ISO 7816-2

Figure 1. Delivery Form

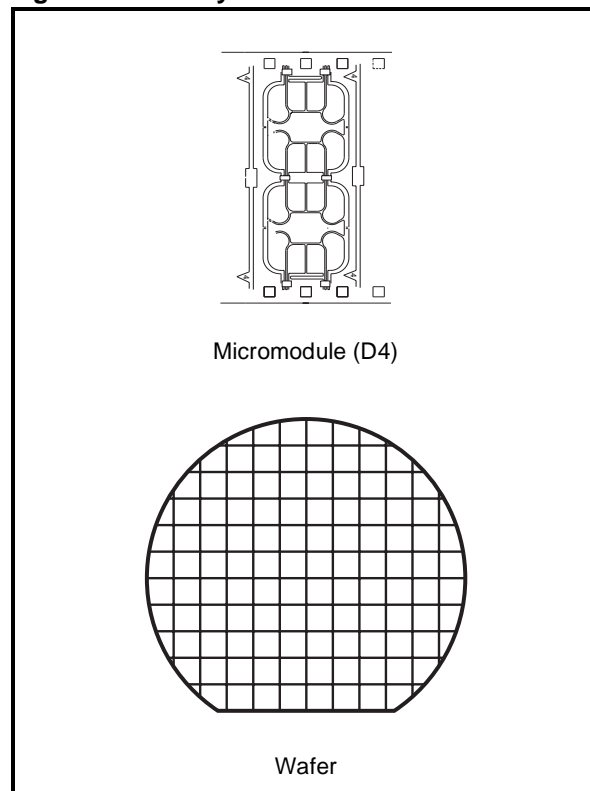

HARDWARE DESCRIPTION

The ST19RF08, a member of the ST19 device family, is a serial access microcontroller especially designed for very large volume and cost competitive secure portable objects.

The ST19RF08 is based on a STMicroelectronics 8-bit CPU and includes on chip memories: User ROM, User RAM and User EEPROM with state of the art security features.

ROM, RAM and EEPROM memories can be configured into partitions with customized access rules. Access from any memory area to another is protected by hardware FIREWALLS.

Access rules are User defined and can be selected by mask options or during the life of the product.


It is manufactured using the highly reliable ST CMOS EEPROM submicron technology.

As with all the other ST19 family members, it is fully compatible with the ISO 7816 standards for Smartcard applications.

SOFTWARE DEVELOPMENT

Software development and firmware (ROM code/options) generation are completed by the ST19-HDSX development system.

Figure 2. Block diagram

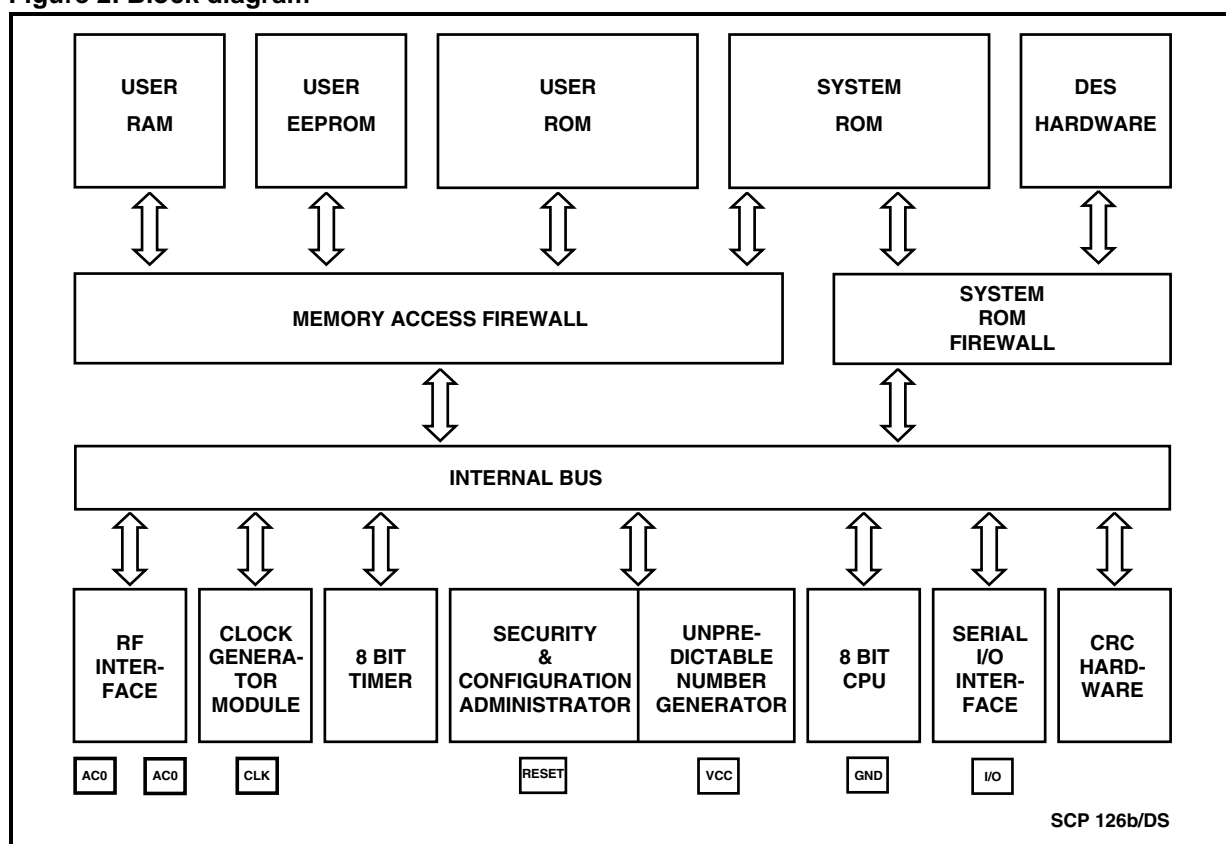

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.
All other names are the property of their respective owners.

© 2001 STMicroelectronics - All rights reserved
BULL CP8 Patents

STMicroelectronics GROUP OF COMPANIES
Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany -
Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore -
Spain - Sweden - Switzerland - United Kingdom - United States
www.st.com