

SHINDENGEN

Schottky Rectifiers (SBD)

Dual

DF10SC9

90V 10A

FEATURES

- SMT
- $T_j=150^\circ\text{C}$
- P_{RRSM} avalanche guaranteed
- High current capacity with Small Package


APPLICATION

- Switching power supply
- DC/DC converter
- Home Appliances, Office Equipment
- Telecommunication

OUTLINE DIMENSIONS

Case : STO-220

Unit : mm

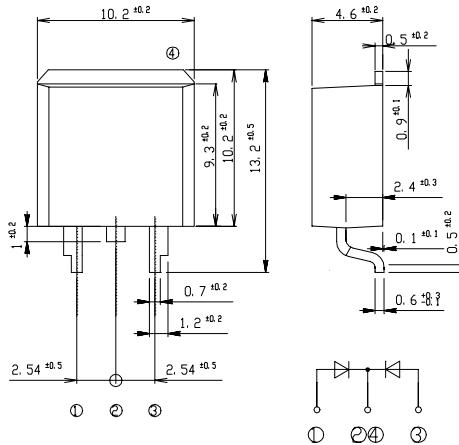

RATINGS

● Absolute Maximum Ratings (If not specified $T_c=25^\circ\text{C}$)


Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{stg}		-55 ~ 150	°C
Operating Junction Temperature	T_j		150	°C
Maximum Reverse Voltage	V_{RM}		90	V
Repetitive Peak Surge Reverse Voltage	V_{RRSM}	Pulse width 0.5ms, duty 1/40	100	V
Average Rectified Forward Current	I_0	50Hz sine wave, R-load, Rating for each diode $I_0/2$, $T_c=131^\circ\text{C}$	10	A
Peak Surge Forward Current	I_{FSM}	50Hz sine wave, Non-repetitive 1 cycle peak value, $T_j=125^\circ\text{C}$	150	A
Repetitive Peak Surge Reverse Power	P_{RRSM}	Pulse width 10 μs , Rating of per diode, $T_j=25^\circ\text{C}$	330	W


● Electrical Characteristics (If not specified $T_c=25^\circ\text{C}$)

Item	Symbol	Conditions	Ratings	Unit
Forward Voltage	V_F	$I_F=5\text{A}$, Pulse measurement, Rating of per diode	Max.0.75	V
Reverse Current	I_R	$V_R=V_{RM}$, Pulse measurement, Rating of per diode	Max.3	mA
Junction Capacitance	C_j	$f=1\text{MHz}$, $V_R=10\text{V}$, Rating of per diode	Typ.185	pF
Thermal Resistance	θ_{jc}	junction to case	Max.1.2	°C/W

DF10SC9


Forward Voltage

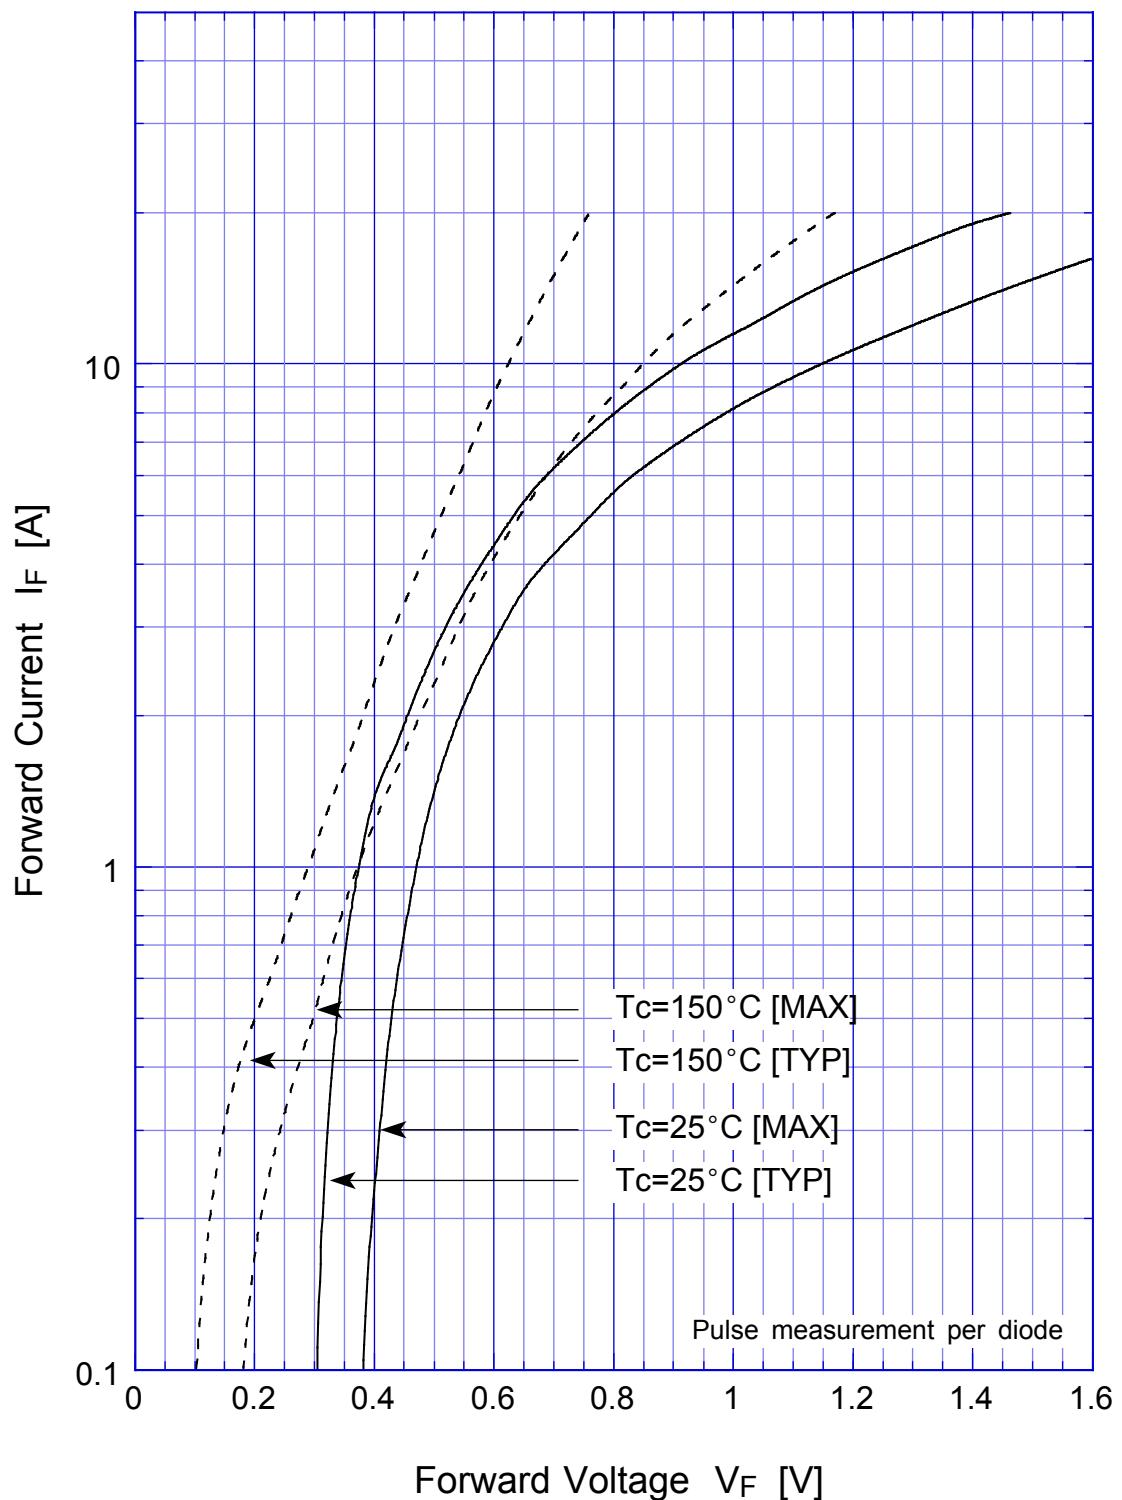

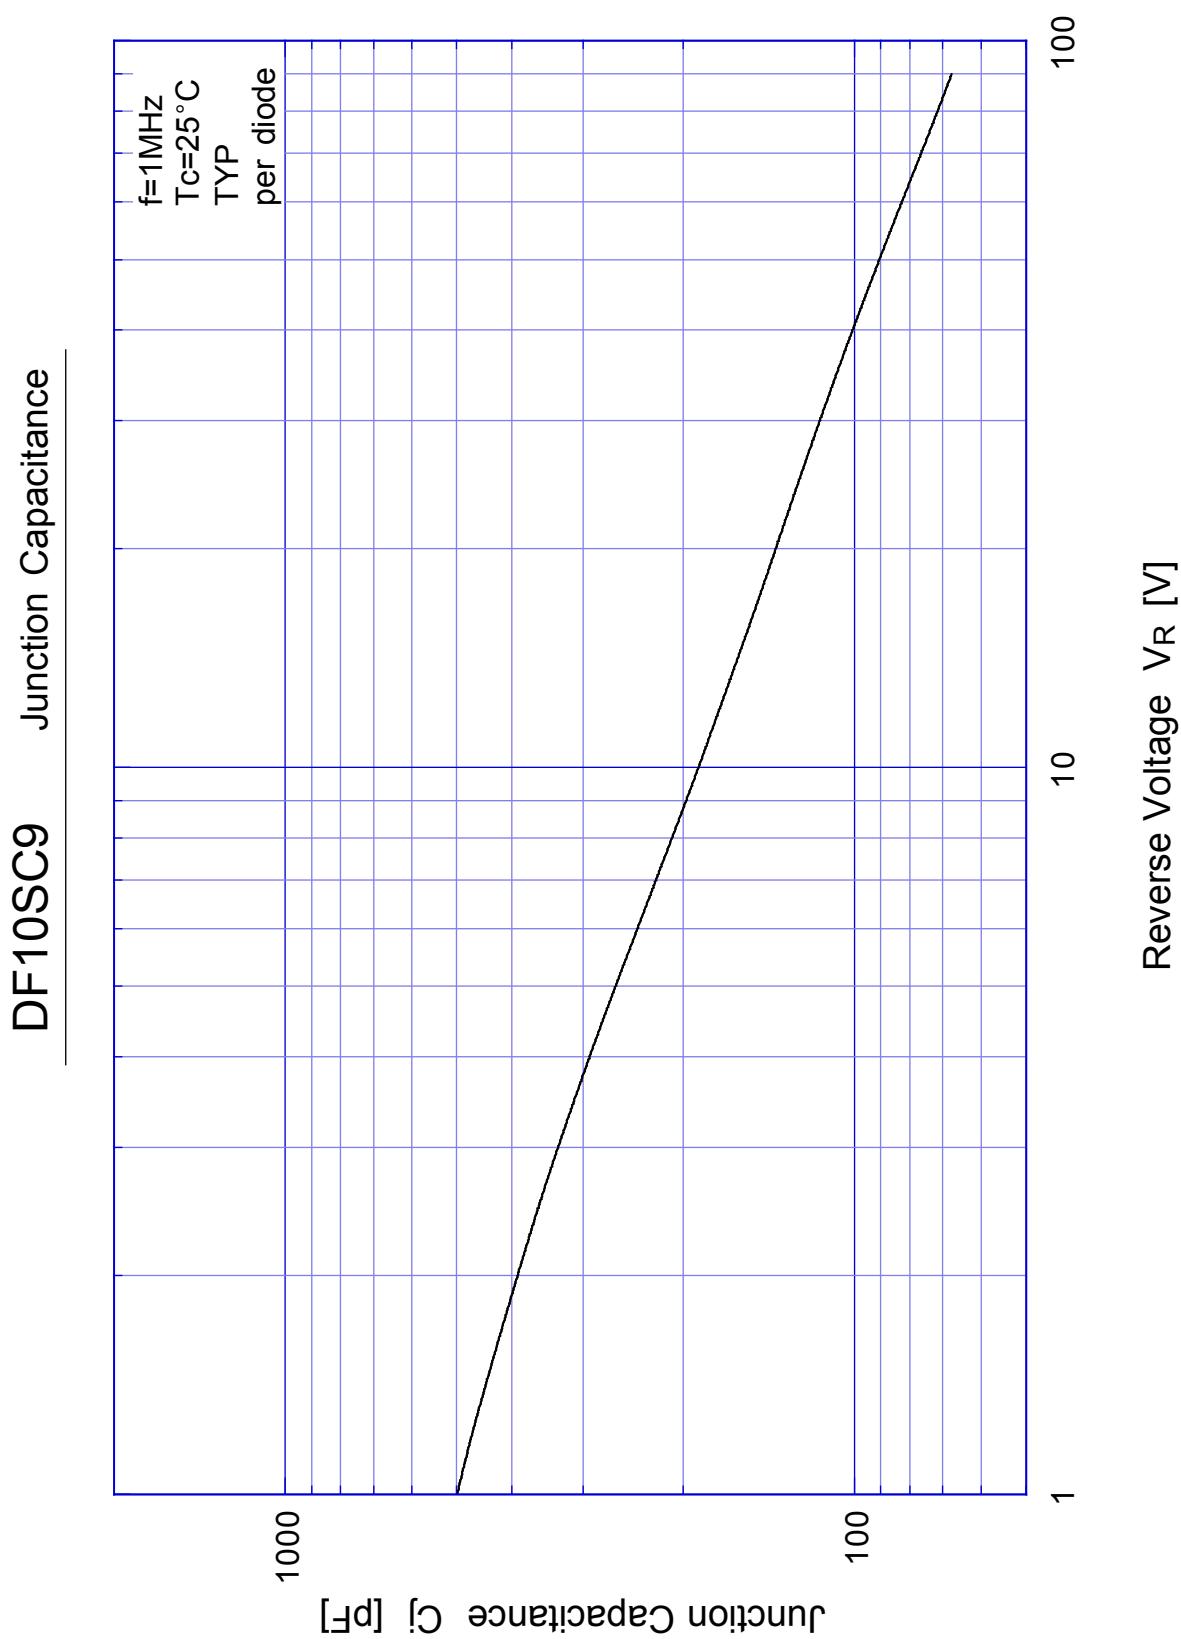


DF10SC9


Reverse Current

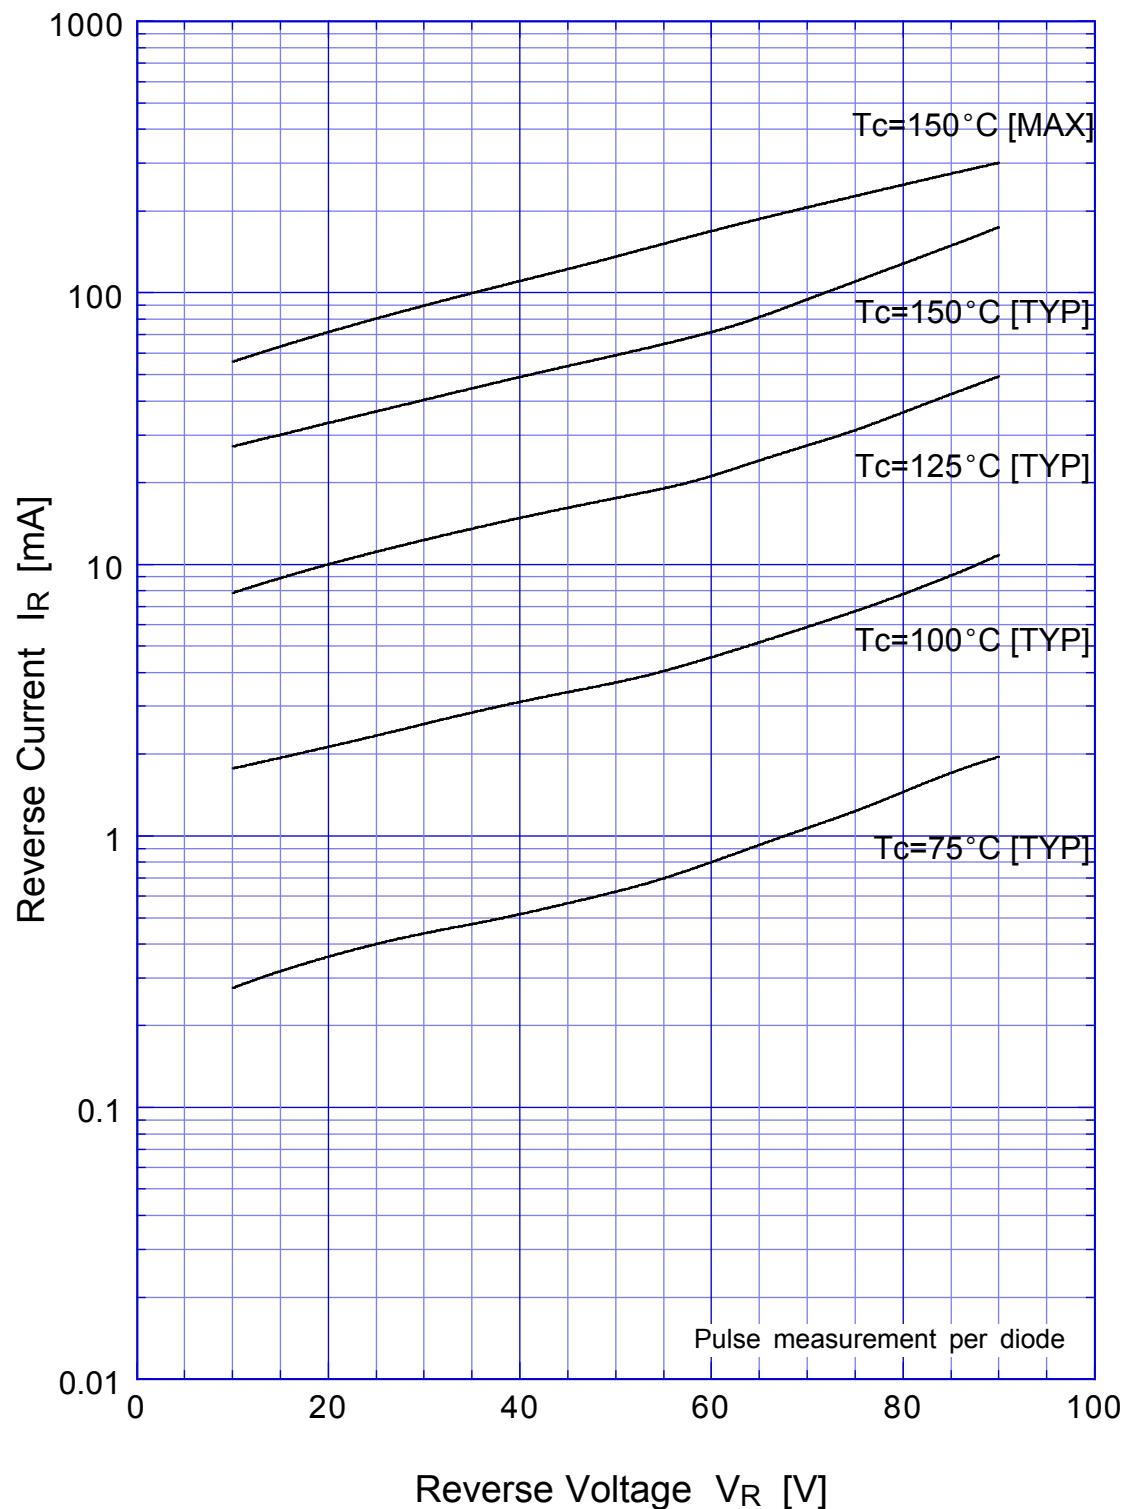



DF10SC9 Reverse Power Dissipation


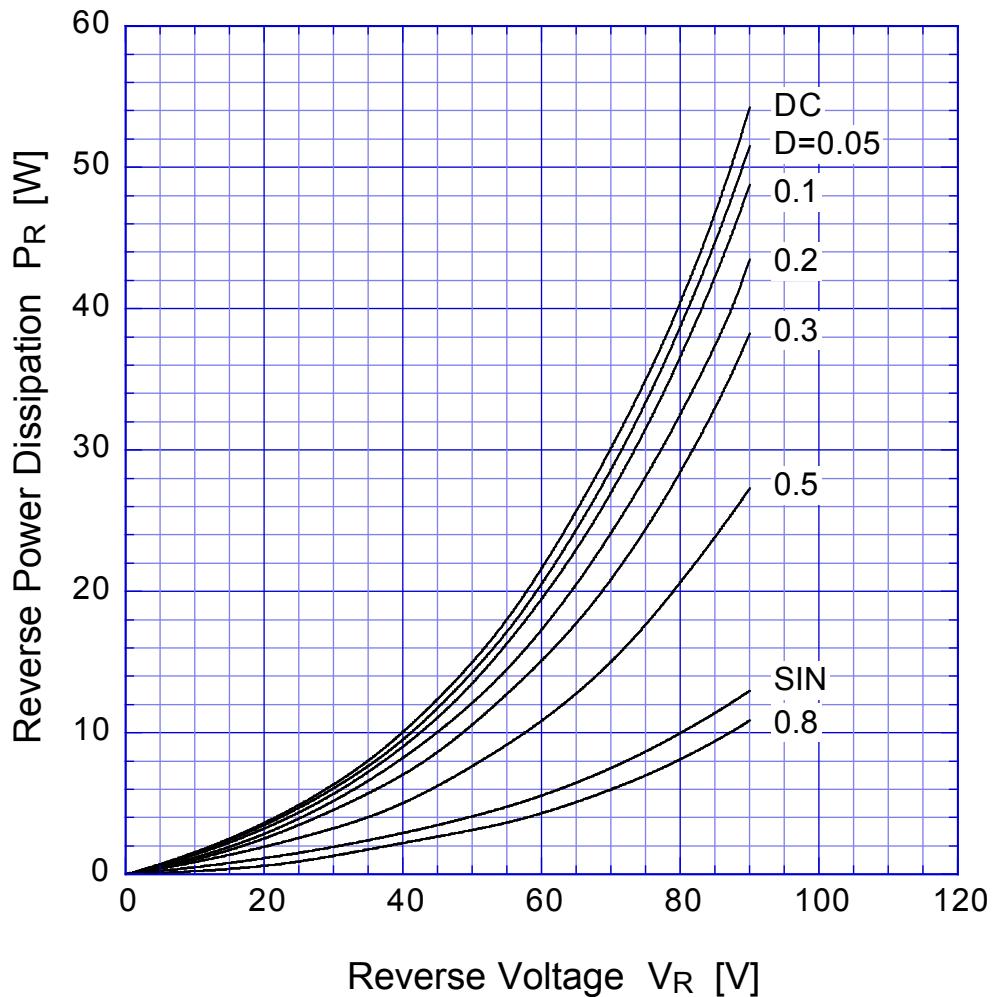


$T_j = 150^\circ\text{C}$

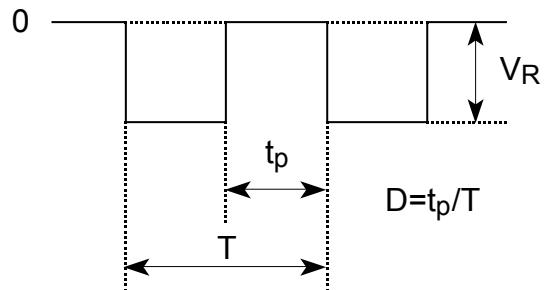


DF10SC9 Forward Power Dissipation

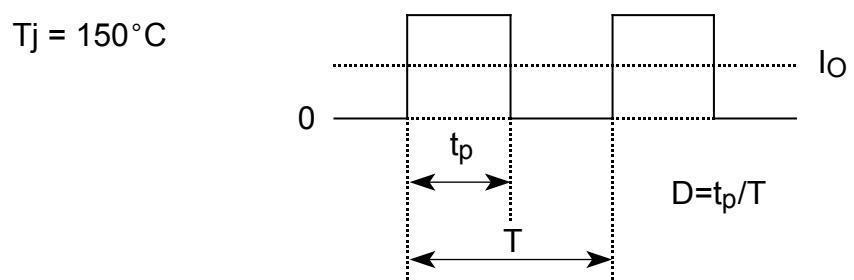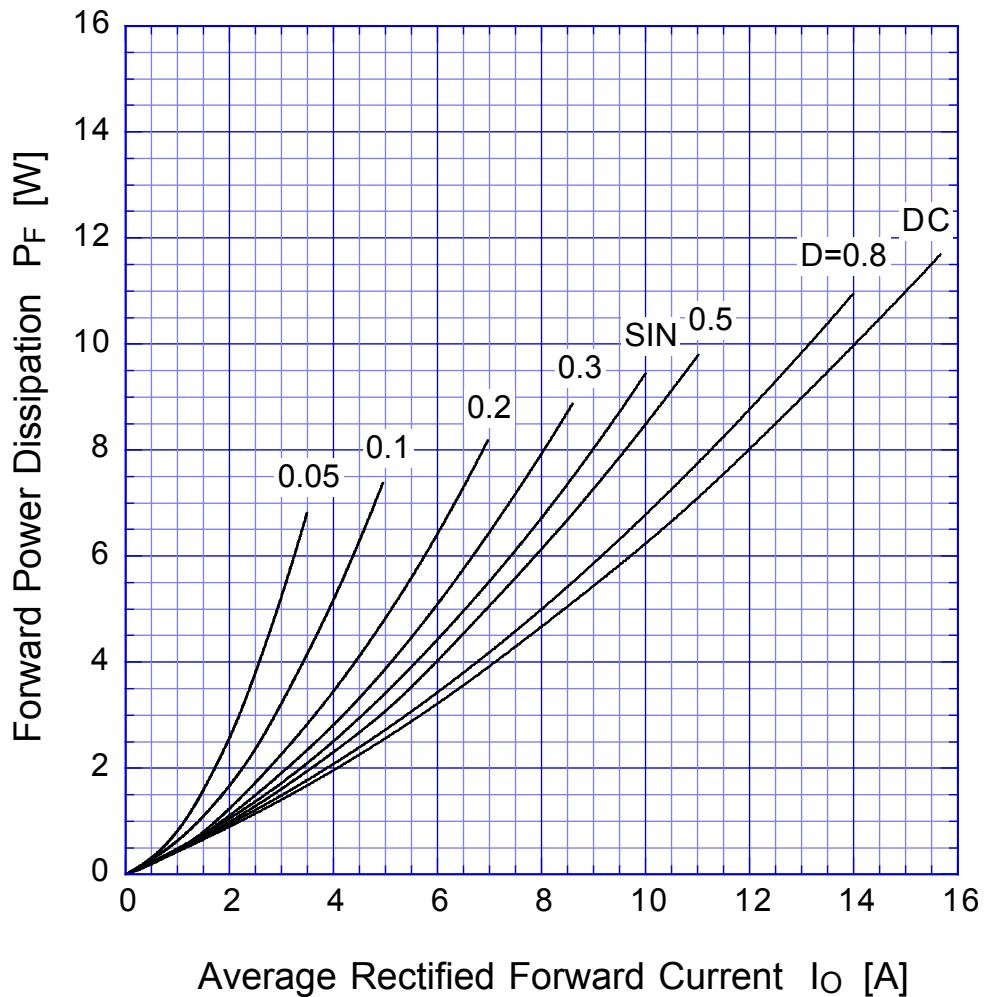

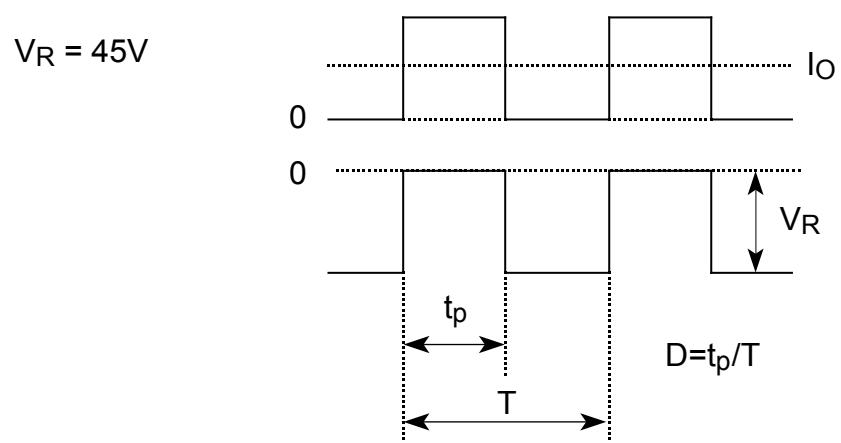
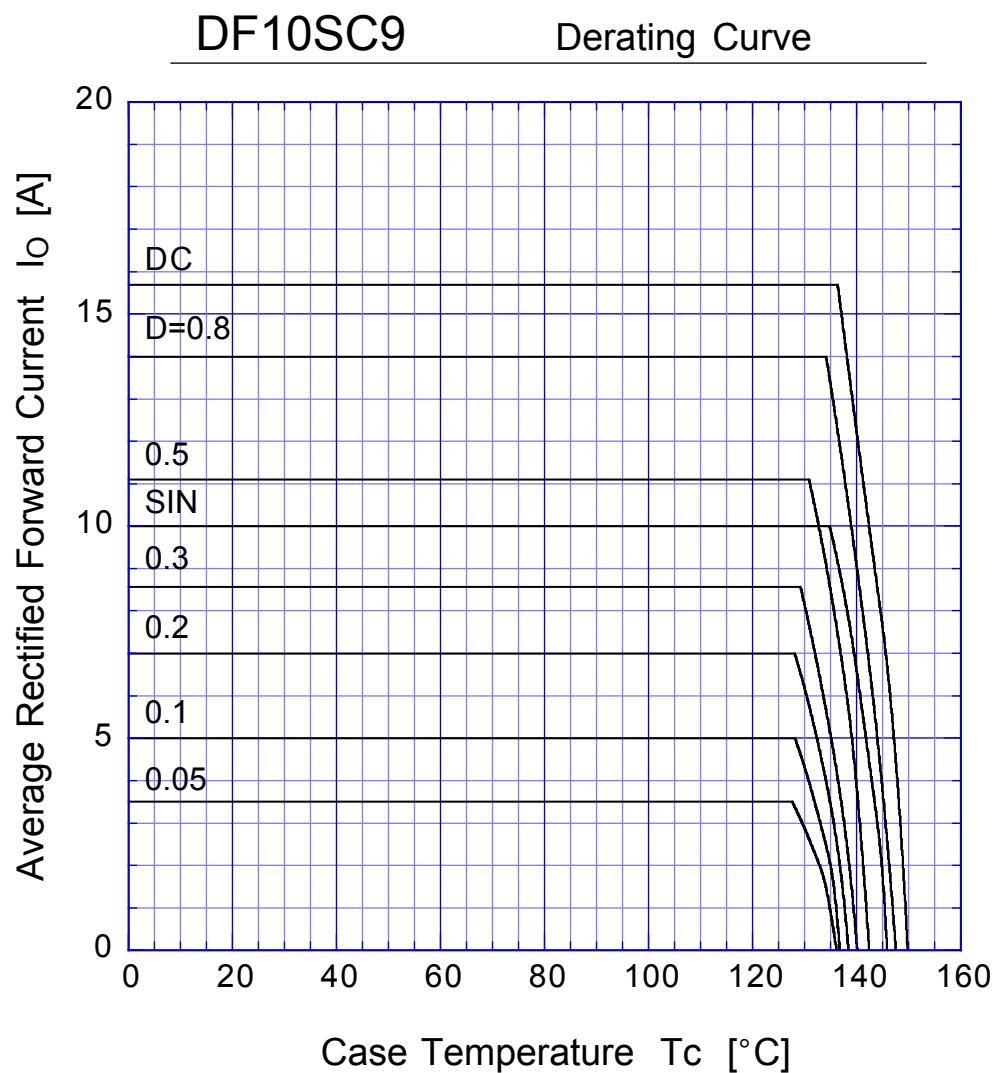


DF10SC9

Peak Surge Forward Capability

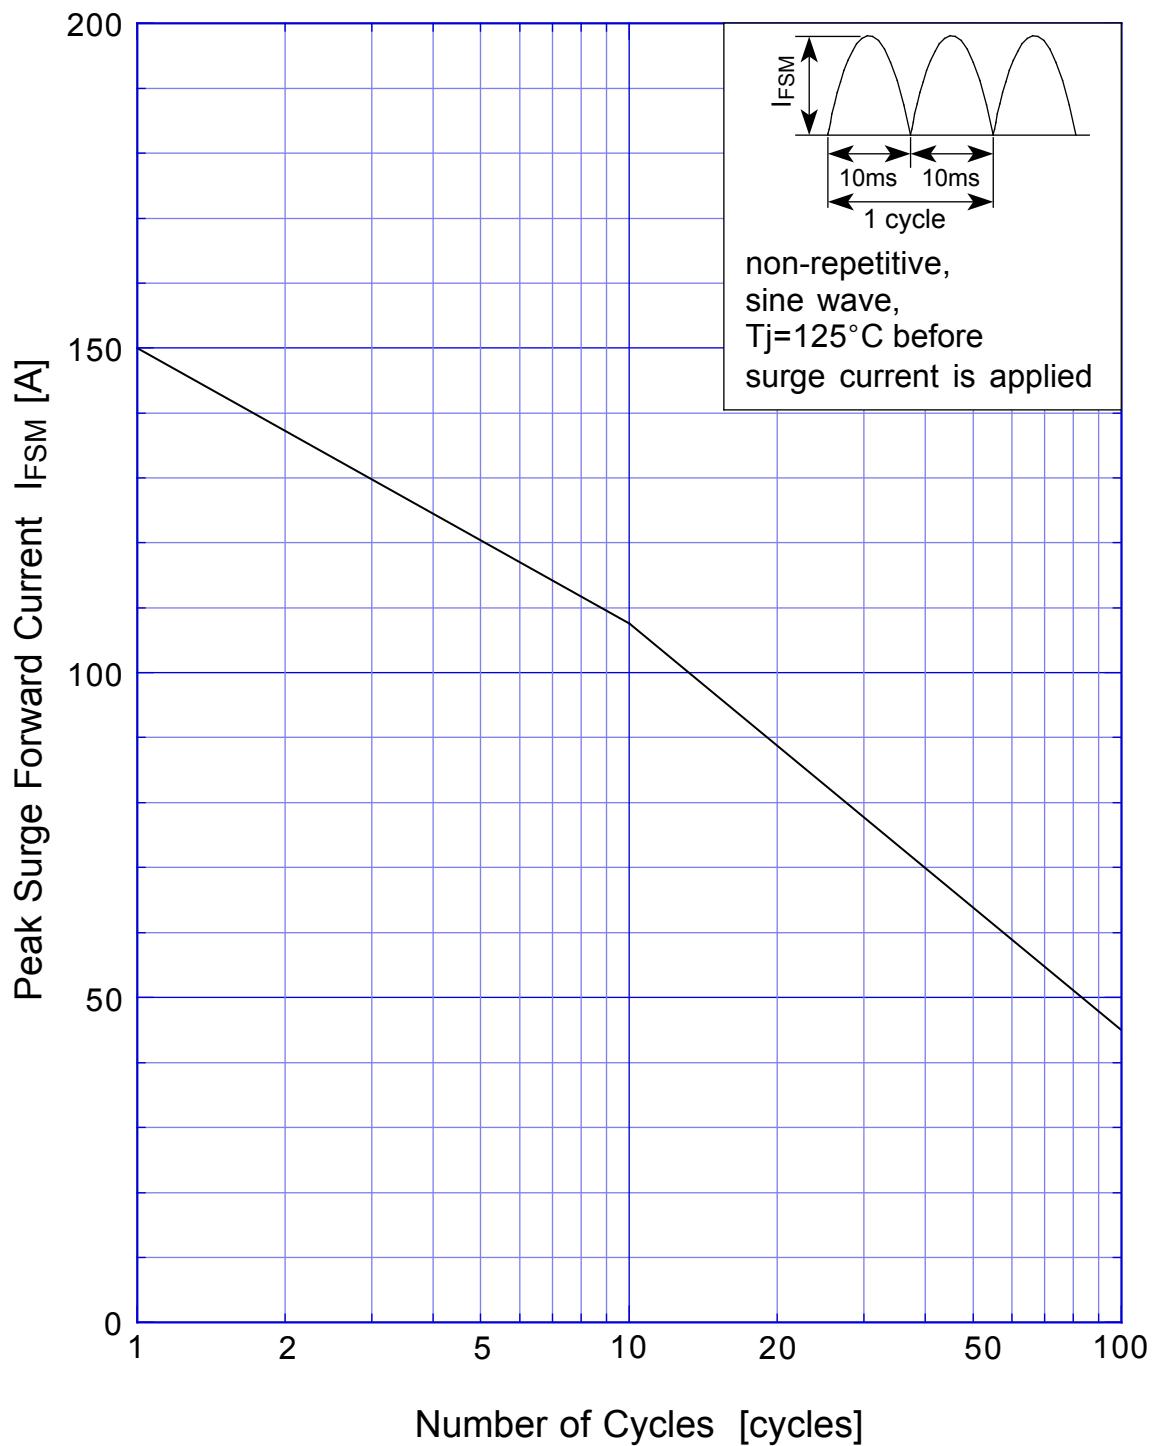

SBD Repetitive Surge Reverse Power Derating Curve

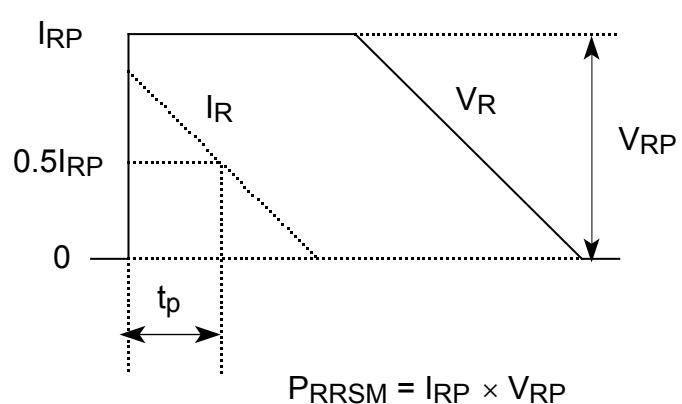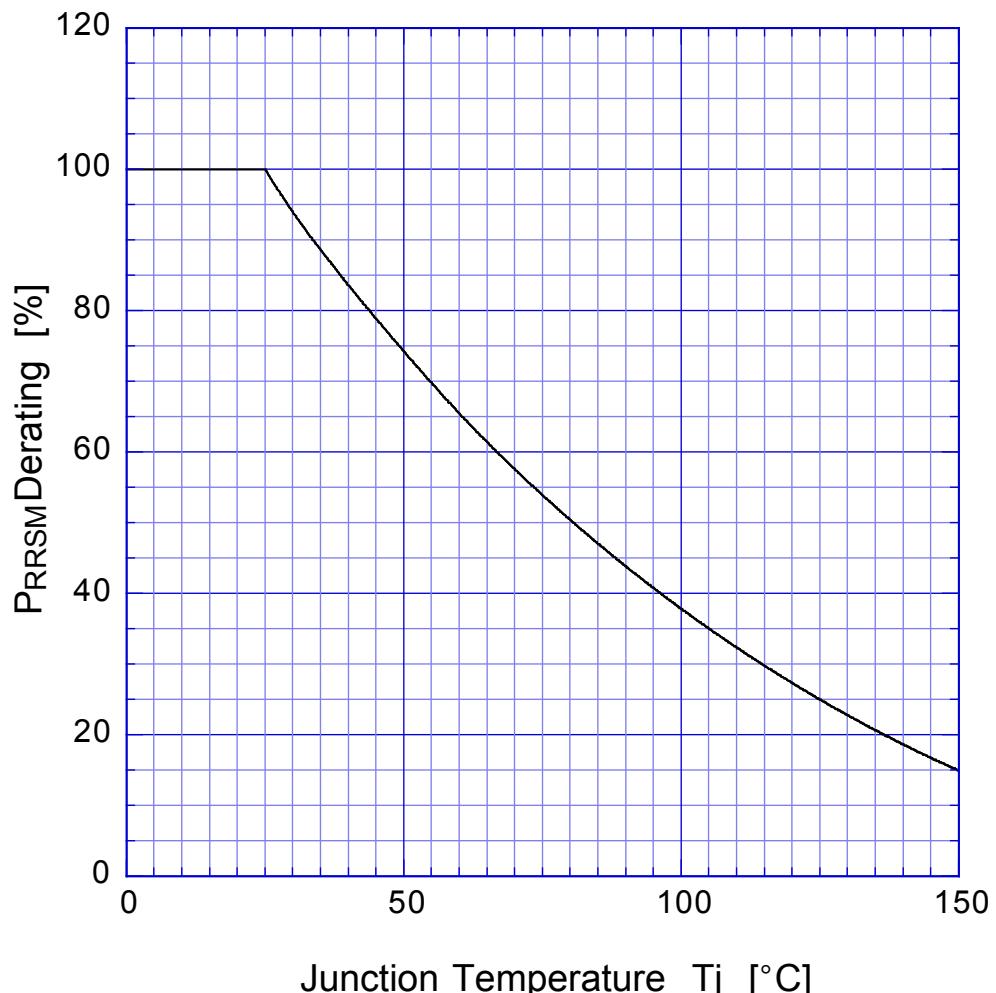

SBD Repetitive Surge Reverse Power Capability

