
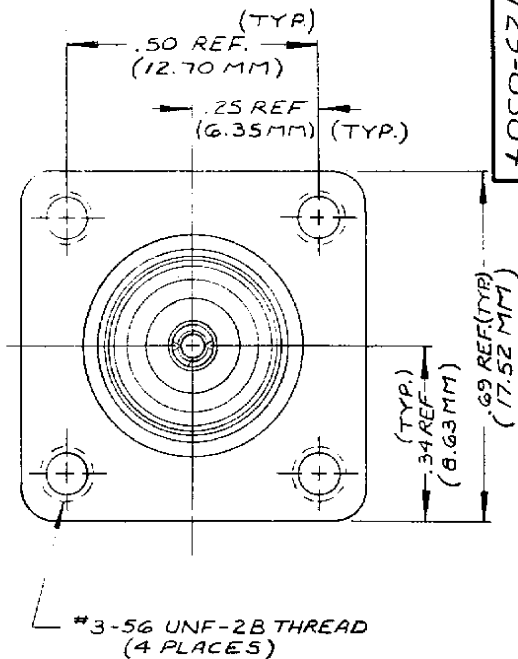


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

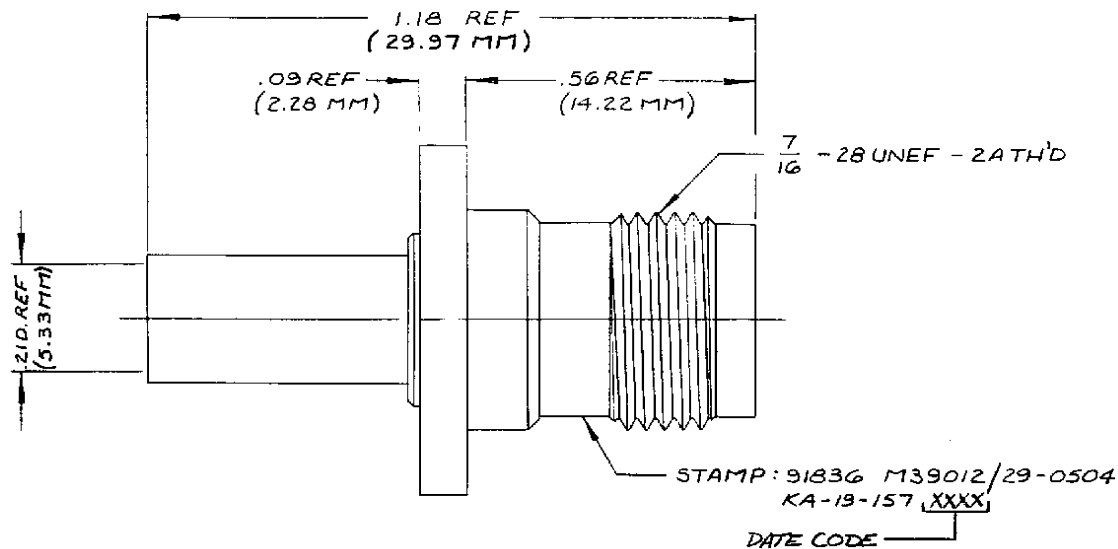

M39012/29-0504

REVISIONS	
ISSUE	CHANGES
4	CN 21667 C PAS 23 FEB 81
5	CN 25533 D MJB 17 DEC 83
6	CN 27833 A SD 3 MAR 86
8	CN 32302 A LNM 20 JUN 90

NOTES

1. FOR USE WITH RG-58/U CABLE.
2. FOR CABLE TRIMMING USE KTJ-113 & KTD-166.
3. FOR CRIMPING USE DIE SIZE 01.
4. FOR CABLING INSTRUCTIONS SEE CP-465.
5. MATERIALS:
 CENTER CONTACT - BERYLLIUM COPPER, QQ-C-530
 FLANGE - BRASS, QQ-B-613
 K-GRIP - COMMERCIAL BRONZE, ALLOY 220
 ALL OTHER METAL PARTS - BRASS, QQ-B-626
 INSULATOR - TEFLON, L-P-403
6. FINISHES:
 CENTER CONTACT - GOLD PLATE, MIL-G-45204
 ALL OTHER METAL PARTS - SILVER PLATE, QQ-B-626
7. ELECTRICAL CHARACTERISTICS
 NOMINAL IMPEDANCE - 50 Ω
 FREQUENCY RANGE - DC TO 11 GHz
 WORKING VOLTAGE - 500 VOLTS RMS

GSD

SCALE:	4:1
APPROX. SURFACE AREA:	
	KA-19-157
USED ON:	
REF:	
TNC PANEL JACK	
DRAWN JEP	DATE 26 OCT 82
APPR. MJB	DATE 28 OCT 82

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10787

M39012/29-0504

GSD

UNLESS OTHERWISE SPECIFIED:

- | | |
|--|--|
| 1. TOLERANCES: FRACTIONS & 2 PLACE DECIMALS ± .010 | 2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX. |
| 3 PLACE DECIMALS ± .004 | 3. NO FILLETS PERMITTED. |
| ANGLES ± 0°30' | 4. SURFACE ROUGHNESS 63 MICROINCHES RMS MAX. |
| T. I. R. CONCENTRICITY OF ANY 2 DIAMETERS MAY NOT EXCEED HALF THE SUM OF THEIR TOLERANCES. | 5. ALL DIMENSIONS PRIOR TO PLATING. |
| | 6. ALL PLATING IN ACCORDANCE WITH KER 10004. |