

Surface Mount Noise Sources SMN7111-F1A 50 kHz to 1 GHz

Specifications

RF Frequency	50 kHz to 1 GHz
Noise Spectral Density (N_o)	-119 dBm/Hz Min


Package and Connectivity

Construction	SMT 0.50 inch sq
--------------	------------------

Environmental

Operating Temperature	-40 to 85 °C
Storage Temperature	-55 to 125 °C

Notes

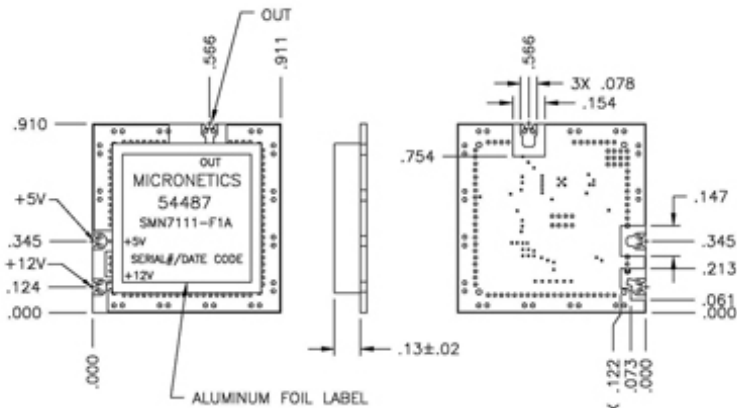

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | www.Micronetics.com

MICRONETICS

