

Nominal frequency (f0)

12.8 MHz

Frequency stabilities

Parameter	Frequency stability	Operating temp. range
Over all (df/f0) vs. operating temp. range (df/f@25 °C)	-4.6 to 4.6 ppm -0.28 to 0.28 ppm	-40 ... 85 °C
Parameter	Value	Condition
initial tolerance (df/f0) vs. supply voltage change (df/f) vs. load change (df/f) aging first year vs. aging / 15 years (df/f) Holdover 24 h	-1 to 1 ppm -0.2 to 0.2 ppm -0.2 to 0.2 ppm <± 0.8 ppm <± 2.5 ppm ± 0.32 ppm	@ 25 °C static; 3.3 V ±5 % static; Load ± 10 % @ 40 °C incl. temp. stab. and supply voltage
total freq. stab.: <+/-4,6ppm for all causes @ 20 years aging meet GR1244		

RF output

Parameter	Value	Condition
Signal	LVC MOS	
Load	15 pF ±10 %	
Fan out	3	
Rise Time	< 5 ns	@ 10 to 90 %Vout
Fall Time	< 5 ns	@ 90 to 10 %Vout
Duty cycle	45 / 55 %	@ 1.65 V
V Low	x < 0.33 V	
V High	x > 2.97 V	
Sub Harmonics	<- 80 dBc	
Spurious	<- 80 dBc	
Enable function	Enable Function Pin 1	output Pin 3
	high	data
	open	data
	low	high tristate

Supply voltage

Parameter	Value	Condition
Supply voltage (Vs)	3.3 V ± 5 %	
Current consumption steady state	< 15 mA	@ Vsnom & 25 °C

Additional Parameters

Parameter	Value	Condition	
Phase Noise	< -85 dBc/Hz < -110 dBc/Hz < -125 dBc/Hz < -135 dBc/Hz < -145 dBc/Hz	10 Hz 100 Hz 1000 Hz 10 kHz 100 kHz	max values
Short term stability	<± 1000.0 E-12	1 sec	
Start-up time	< 10 ms		
Additional information 24 hour drift: ±0.04ppm			
Processing & Packing	handling&processing note		


Additional environmental conditions

Tensile strength of leads DIN IEC 68 T2-21 (Ua 1)
Flexibility of leads DIN IEC 68 T2-21 (Ub)
Sealing test A nicht dicht (not hermetically sealed)
Solderability DIN IEC 68 T2-20 (Ta) 100% RoHS compliant
Solvent resistance EN 60068-2-45, Test xA washable device

Absolute Maximum Ratings


Parameter	Min	Typ	Max	Units	Condition
Operable temperature range	-40		85	°C	
Storage temperature range	-55		105	°C	

Enclosure

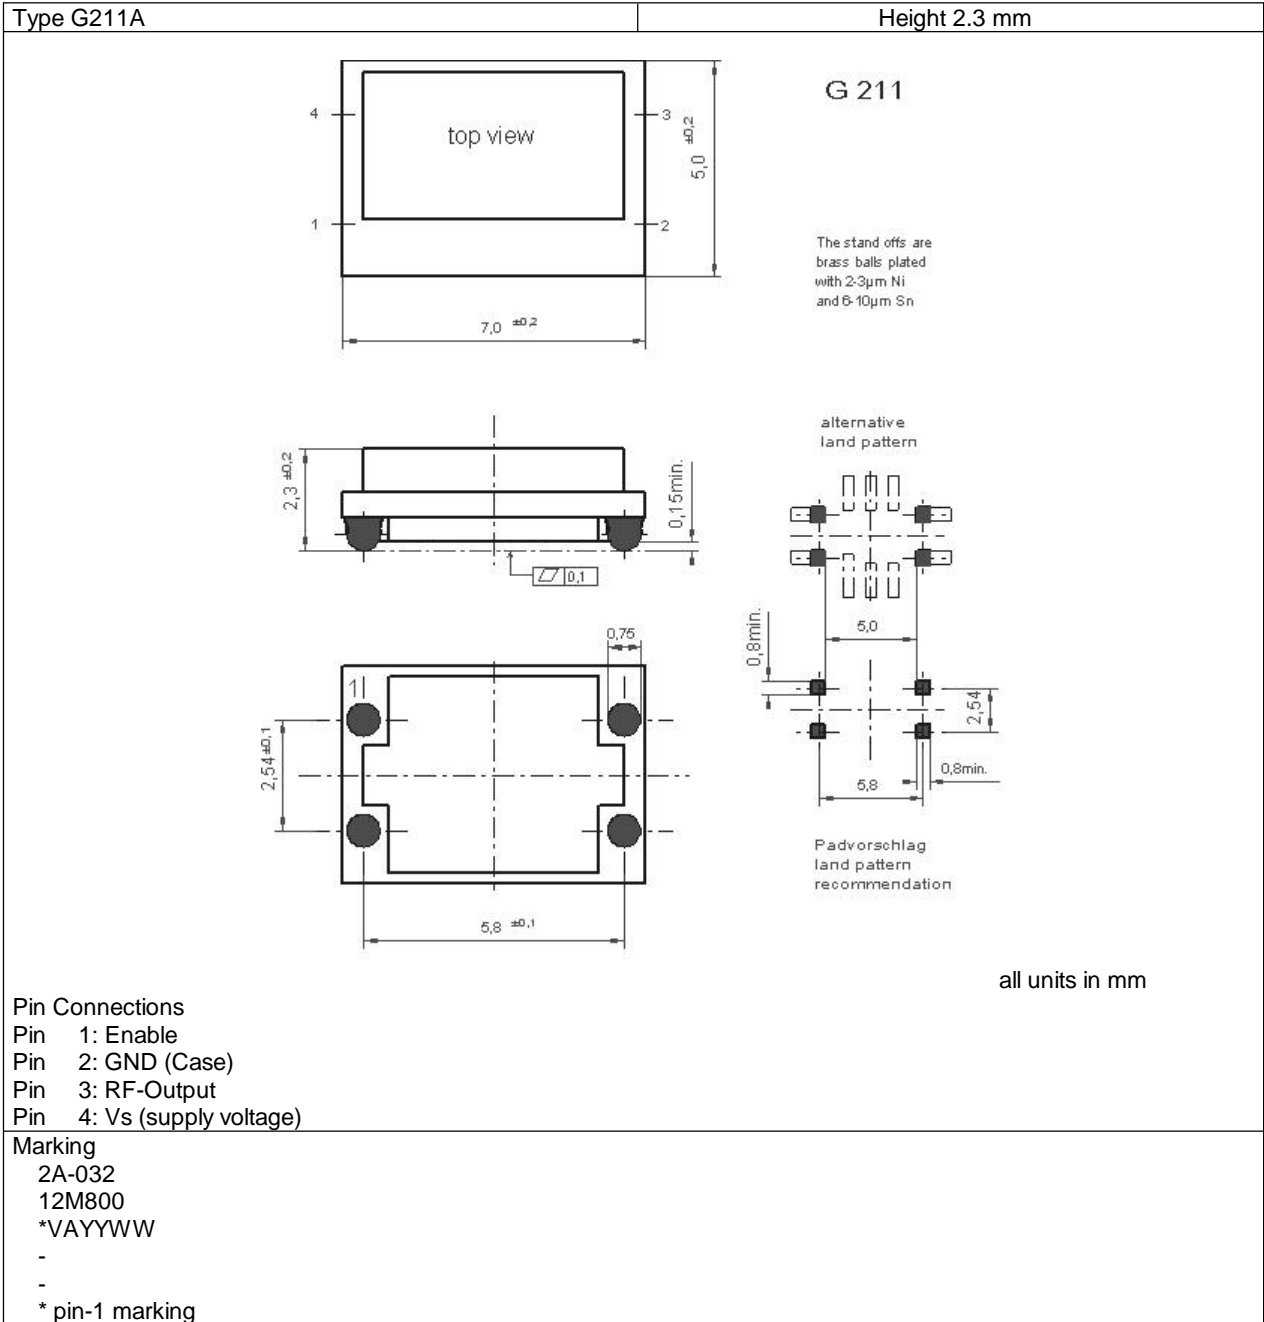

all units in mm

Reflow profile

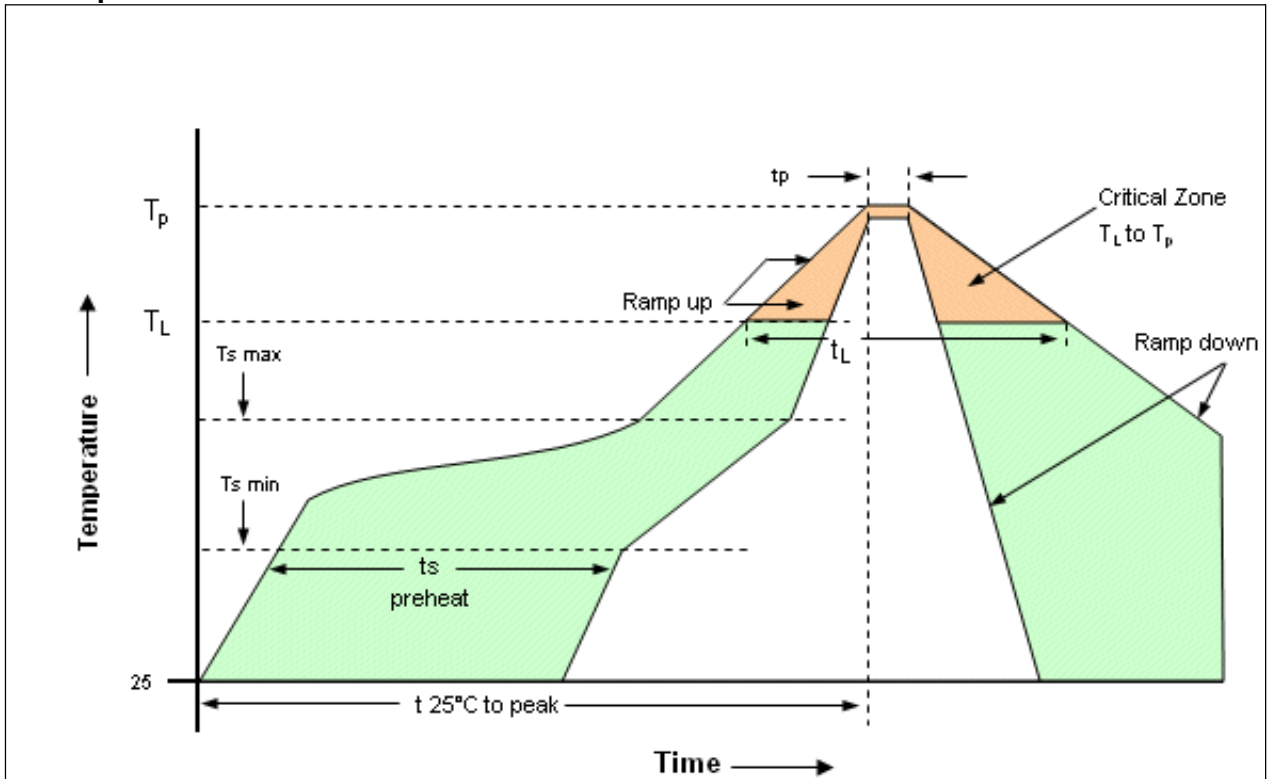


Profile Feature	Pb-Free Assembly/Sn-Pb Assembly
Average ramp-up rate (TL to Tp)	3°C/second max.
Preheat -Temperature Min (T _{smin})	150°C
-Temperature Min (T _{smax})	200°C
-Time (min to max) (t _s)	60-180 seconds
T _{smax} to TL - Ramp-up Rate	3°C/second max.
Time maintained above - Temperature (TL)	217°C
- Time (t _L)	60-150 seconds
Peak Temperature (T _p)	max 260°C
Time within 5°C of actual Peak Temperature (t _p)	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.

Note: All temperatures refer to topside of the package, measured on the package body surface.

Additional Information

This SMD oscillator has been designed for pick and place reflow soldering.

Standard shipping method

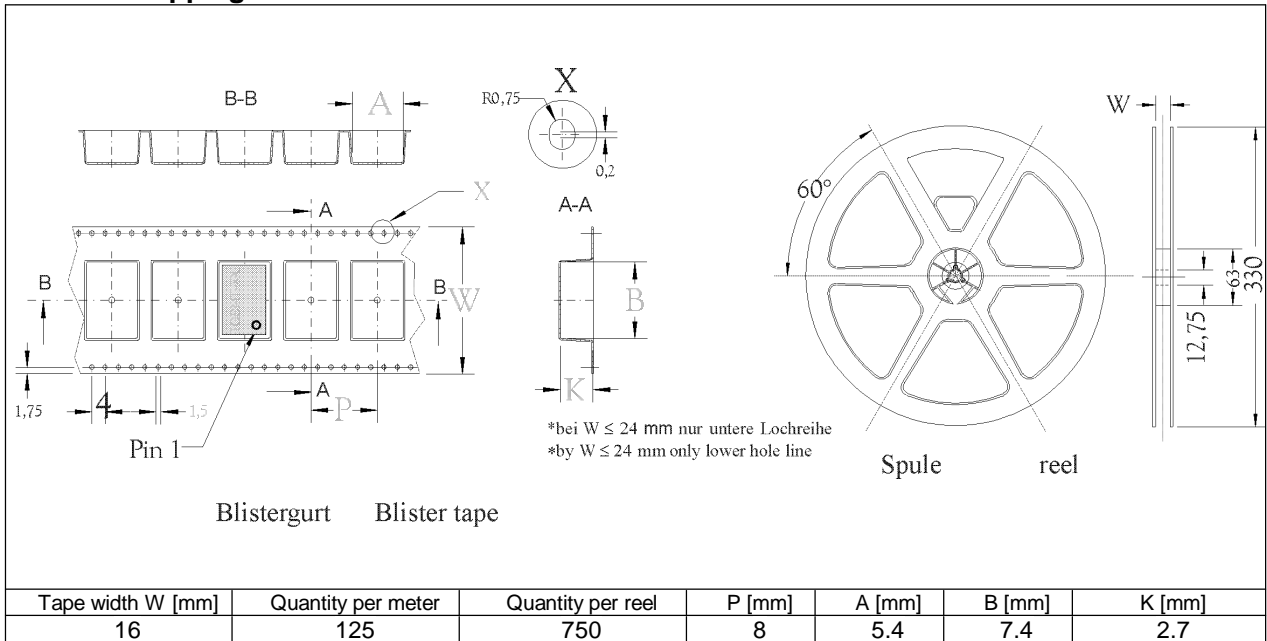

Notes:

Unless otherwise stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C).
Subject to technical modification.