

Nominal frequency (f0)

12.8 MHz

Frequency stabilities

Parameter	Frequency stability	Operating temp. range
Over all (df/f0)	-4.6 to 4.6 ppm	
Additional information Holdover stability @temp. stab. -20..+70°C, supply voltage + 24h aging: <=±0.32ppm		
Parameter	Value	Condition
Holdover 24 h	± 0.28 ppm	incl. temp. stab. -20...+70°C
overall incl.: initial, temp.-20..+70°C, supply, load var. and aging 20 years		

RF output

Parameter	Value	Condition
Signal	LVC MOS	
Load	15 pF ±10 %	
Fan out	3	
Rise Time	< 8 ns	@ 10 to 90 %Vout
Fall Time	< 8 ns	@ 90 to 10 %Vout
Duty cycle	45 / 55 %	@ 1.65 V
V Low	x < 0.33 V	
V High	x > 2.97 V	
Enable function	Enable Function	output
	Pin 1	Pin 3
	high	data
	open	data
	low	no data

Supply voltage

Parameter	Value	Condition
Supply voltage (Vs)	3.3 V ± 5 %	
Current consumption steady state	< 4 mA	@ Vsnom & 25 °C

Additional Parameters

Parameter	Typ.	Max.	Condition
Phase Noise		-90	dBc/Hz@10Hz
		-115	dBc/Hz@100Hz
		-127	dBc/Hz@1000Hz
		-137	dBc/Hz@10kHz
		-140	dBc/Hz@100kHz
Parameter	Value		Condition
Additional information This SMD oscillator is designed only for pick and place/reflow soldering process. Manual soldering may damage the part and therefore not recommended for the mounting of this oscillator.			
Processing & Packing	handling&processing note		

Additional environmental conditions

Vibration IEC 60068-2-6, Test Fc
Shock IEC 60068-2-27, Test Ea
Sealing test A nicht dicht (not hermetically sealed)
Solderability DIN IEC 68 T2-20 (Ta) 100% RoHS 6 compliant
Solvent resistance EN 60068-2-45, Test xA washable device


Absolute Maximum Ratings

Parameter	Min	Typ	Max	Units	Condition
Operable temperature range	-40		85	°C	
Storage temperature range	-55		125	°C	

Enclosure


Type G298	Height 1.8 mm
<p style="text-align: right; margin-right: 100px;">G 298</p> <p style="text-align: right; margin-right: 100px;">Padvorschlag land pattern recommendation</p>	
all units in mm	
<p>Pin Connections</p> <p>Pin 1: Tristate control Pin 2: GND (Case) Pin 3: RF-Output Pin 4: Vs (supply voltage)</p>	
<p>Marking</p> <p>2A-238 12M800 *VAYYWW - - * pin-1 marking</p>	

Reflow profile

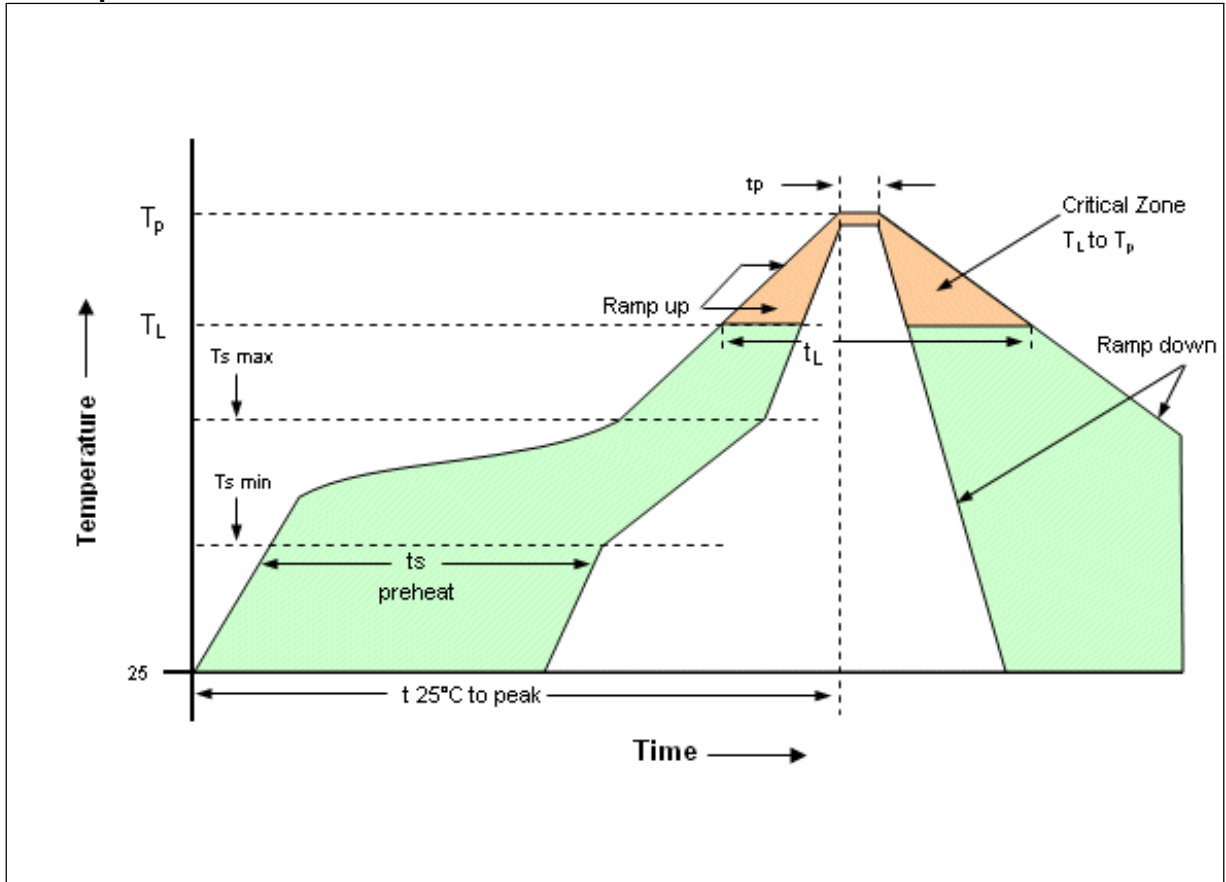

Profile Feature	Pb-Free Assembly/Sn-Pb Assembly
Average ramp-up rate (TL to Tp)	3°C/second max.
Preheat -Temperature Min (T _{smin})	150°C
-Temperature Min (T _{smax})	200°C
-Time (min to max) (t _s)	60-180 seconds
T _{smax} to TL - Ramp-up Rate	3°C/second max.
Time maintainted above - Temperature (TL)	217°C
- Time (t _L)	60-150 seconds
Peak Temperature (T _p)	max 260°C
Time within 5°C of actual Peak Temperature (t _p)	20-40 seconds
Ramp-down Rate	6°C/second max.
Time 25°C to Peak Temperature	8 minutes max.
Note: All temperatures refer to topside of the package, measured on the package body surface.	
Additional Information	
This SMD oscillator has been designed for pick and place reflow soldering.	

Standard shipping method

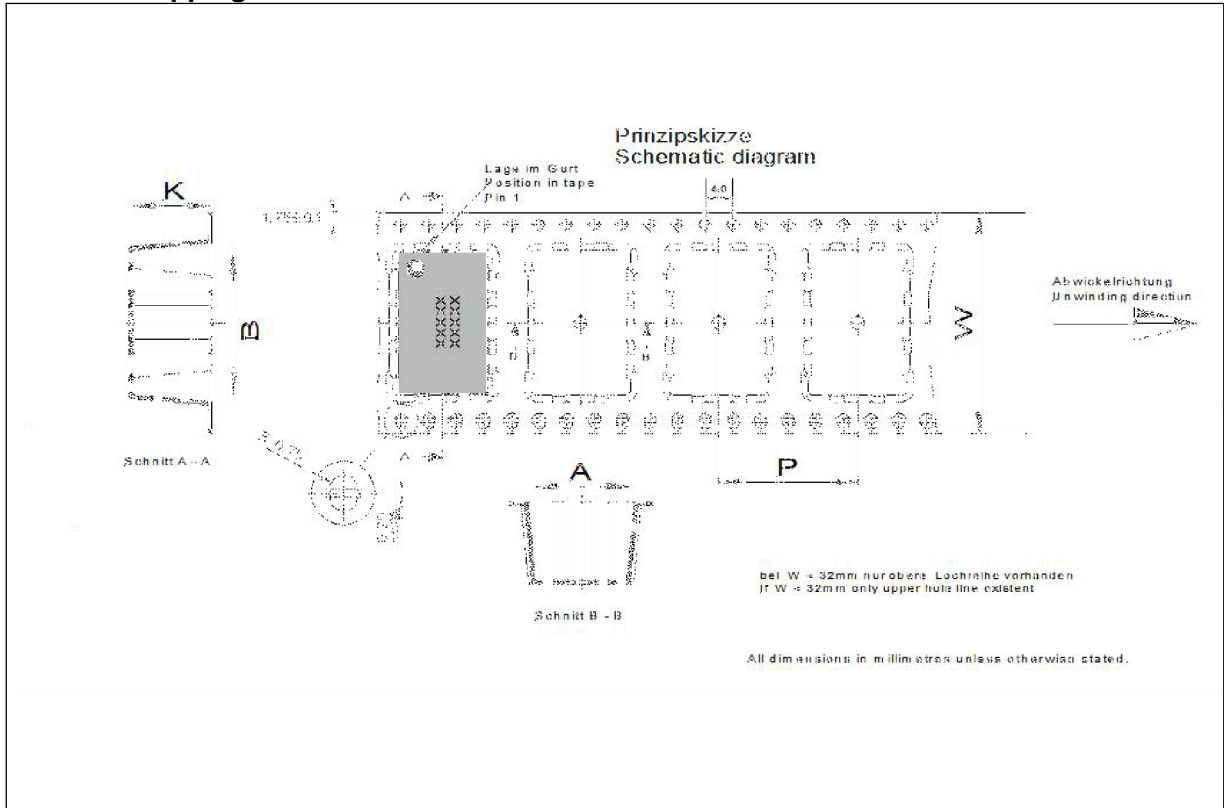

Tape width W [mm]	Quantity per meter	Quantity per reel	P [mm]	A [mm]	B [mm]	K [mm]
16	125	750	8	5.4	7.4	2.7

Notes:

Unless otherwise stated all values are valid after warm-up time and refer to typical conditions for supply voltage, frequency control voltage, load, temperature (25°C).
Subject to technical modification.

For Additional Information, Please Contact

USA:
Vectron International
267 Lowell Road
Hudson, NH 03051
Tel: 1.888.328.7661
Fax: 1.888.329.8328

Europe:
Vectron International
Landstrasse, D-74924
Neckarbischofsheim, Germany
Tel: +49 (0) 7268.801.100
Fax: +49 (0) 7268.801.282

Asia:
Vectron International
1589 Century Avenue, the 19th Floor
Chamtime International Financial Center
Shanghai, China
Tel: 86.21.6081.2888
Fax: 86.21.6163.3598

Disclaimer

Vectron International reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.