



### WBFBP-02C Plastic-Encapsulate Diodes

Schottky Barrier Diode

#### DESCRIPTION

Silicon Epitaxial Planar

#### FEATURES

- Small surface mounting type
- High reliability

#### APPLICATION

High speed switching for detection


For portable equipment:(i.e. Mobile phone,MP3, MD,CD-ROM, DVD-ROM, Note Book PC, etc.)

#### Pb-Free package is available

RoHS product for packing code suffix "G"

Halogen free product for packing code suffix "H"

#### MARKING: F

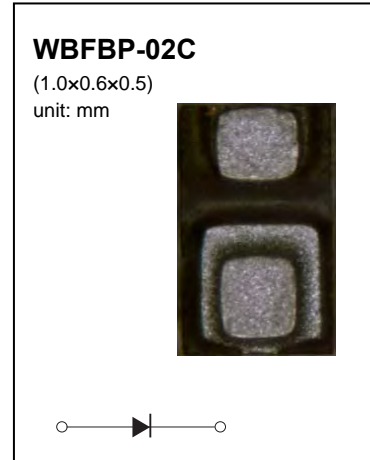

#### Maximum Ratings and Electrical Characteristics, Single Diode @Ta=25°C

Parameter	Symbol	Limit	Unit
DC reverse voltage	$V_R$	30	V
Mean rectifying current	$I_o$	100	mA
Peak forward surge current	$I_{FSM}$	1	A
Power dissipation	$P_D$	100	mW
Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	1000	°C/W
Junction temperature	$T_j$	125	°C
Storage temperature	$T_{stg}$	-55~+150	°C

#### Electrical Ratings @Ta=25°C


Parameter	Symbol	Min	Typ	Max	Unit	Conditions
Forward voltage	$V_F$			0.35	V	$I_F=10mA$
Reverse current	$I_R$			10	$\mu A$	$V_R=10V$



## WBFBP-02C Plastic-Encapsulate Diodes

### Outline Drawing

### WBFBP-02C

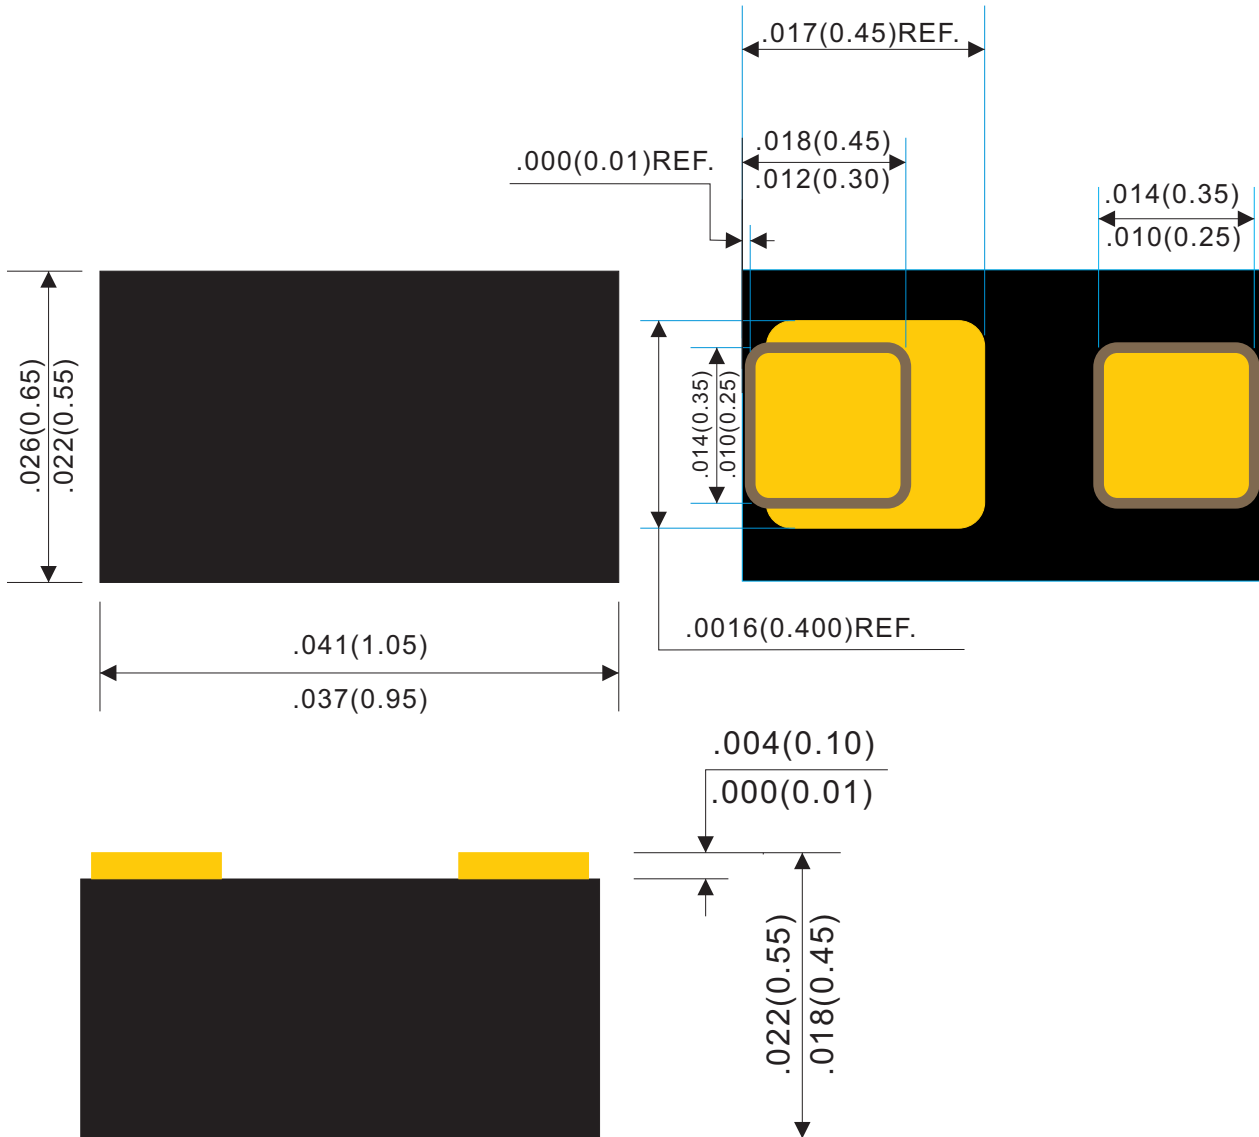

Dimensions in inches and (millimeters)

Rev.B