

VLC1811 Limiter/Switch/ Attenuator




Features:

- **Freq. Range: 5.4 - 5.9 GHz**
- **Peak Input Power:**
 - **Limiter / SPST: +50 dBm max**
 - **Variable Attenuator: -10 dBm max**
- **Duty Cycle: 3%**
- **Pulsewidth: 15 μ Sec max**
- **Insertion Loss: 0.7 dB max**
- **Switching Time: 5 μ Sec max**
- **0 - 60 dB STC variable attenuator linearized at 10 dB/ Volt**
- **Integral Driver with BITE**

Description:

This product combines a 60 dB SPST switch with a variable attenuator. It also has a passive limiting capability.

150 Sohier Road
Beverly, Massachusetts 01915

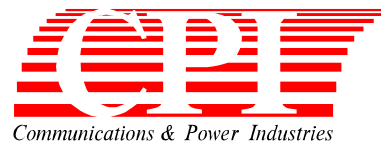

Phone: 978-922-6000 Fax: 978-922-2736
E-Mail: marketing@bmd.cpii.com
Internet: www.cpii.com/bmd