

CDBM120 Thru CDBM1100

Reverse Voltage: 20 - 100 Volts
Forward Current: 1.0 Amp




Features

- Ideal for surface mount applications
- Easy pick and place
- Plastic package has Underwriters Lab. flammability classification 94V-0
- Exceeds environmental standard MIL-S-19500/228
- Low leakage current

Mechanical data

- Case: Mini SMA/SOD-123 molded plastic
- Terminals: solderable per MIL-STD-750, method 2026
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Approx. Weight: 0.04 gram

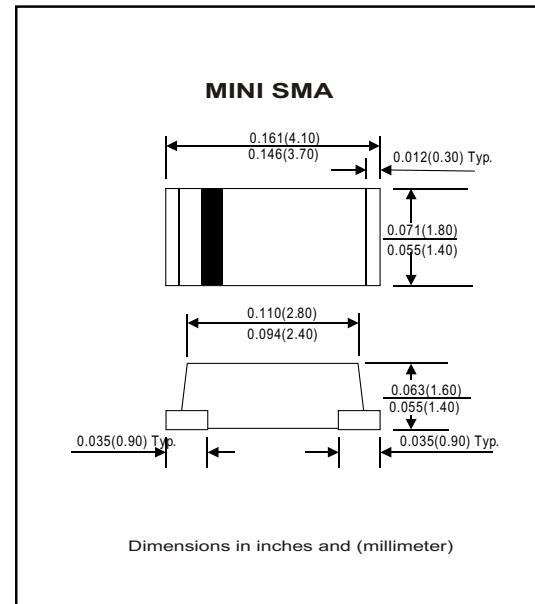

Maximum Ratings and Electrical Characteristics

Parameter	Symbol	CDBM120	CDBM140	CDBM160	CDBM180	CDBM1100	Unit
Max. Repetitive Peak Reverse Voltage	V _{RRM}	20	40	60	80	100	V
Max. DC Blocking Voltage	V _{DC}	20	40	60	80	100	V
Max. RMS Voltage	V _{RMS}	14	28	42	56	70	V
Peak Surge Forward Current 8.3ms single halfsine-wave superimposed on rate load (JEDEC method)	I _{FSM}			30			A
Max. Average Forward Current	I _O			1.0			A
Max. Instantaneous Forward Current at 1.0 A	V _F		0.50	0.70	0.85		V
Max. DC Reverse Current at Rated DC Blocking Voltage Ta=25°C	I _R			0.5			mA
Ta=100°C			10		5		
Max. Thermal Resistance (Note 1)	R _{θJA}		88				°C/W
	R _{θJL}		20				
Operating Junction Temperature	T _j	-55 to +125		-55 to +150			°C
Storage Temperature	T _{STG}		-55 to +150				°C

Note 1: Thermal resistance from junction to ambient and junction to lead P.C.B. Mounted on 0.2 x 0.2 copper pad areas

SMD Schottky Barrier Rectifier

COMCHIP 
www.comchip.com.tw

Rating and Characteristic Curves (CDBM120 Thru CDBM1100)

Fig. 1 - Reverse Characteristics

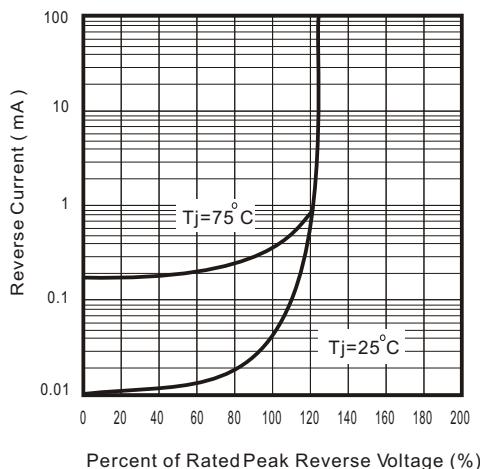


Fig.2 - Forward Characteristics

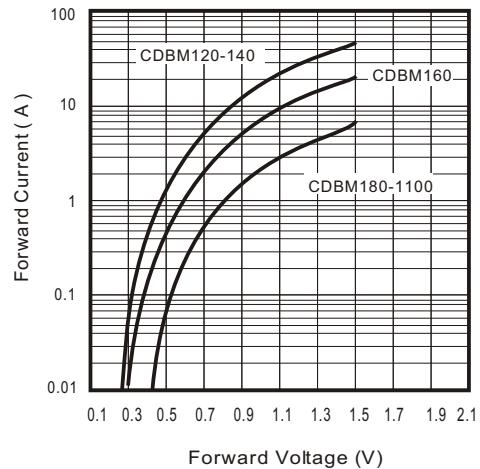


Fig. 3 - Junction Capacitance

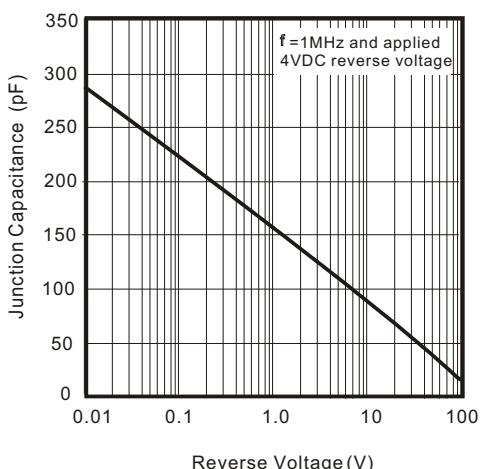


Fig. 4 - Current Derating Curve

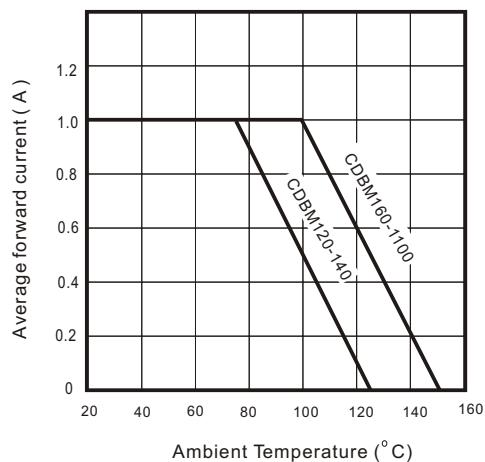


Fig. 5 - Non repetitive Forward Surge Current

