




METAL OXIDE VARISTOR

ZENAMIC

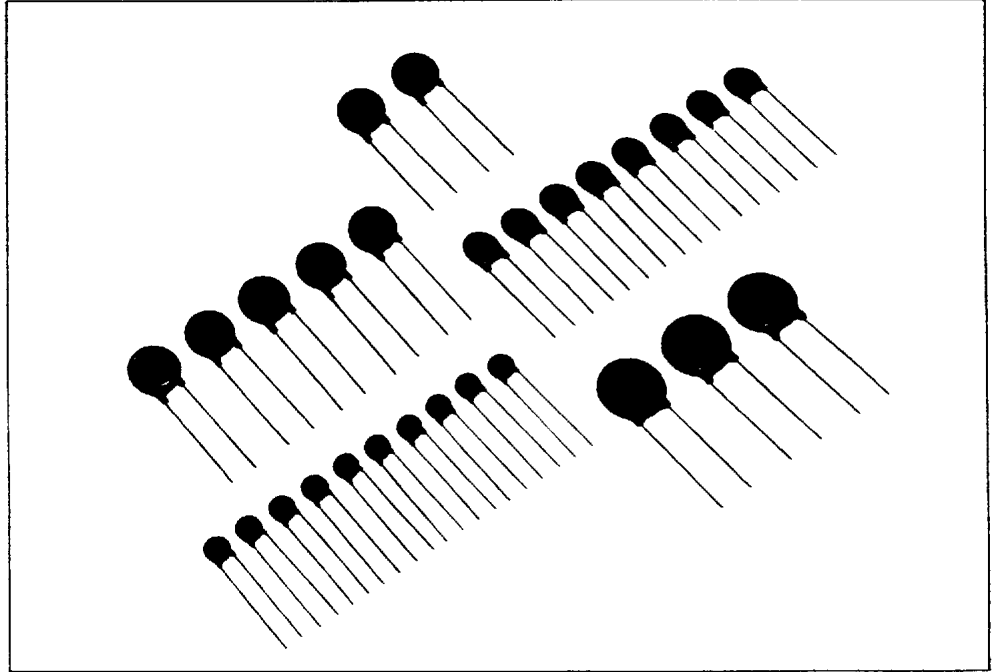

ZENAMIC is the product name of a metal oxide varistor.

Features

- High energy absorption
- Excellent voltage clamping characteristics
- Symmetrical characteristics — for use on AC or DC
- Fast response
- Compact and robust construction
- Low idle power
- High surge current capability
- Specific types for PACE/paks and Solid State Relays

Applications


- For protection of all types of semiconductors
- Suppression of switching transients
- Voltage clipping, and circuit damping
- Absorption of surge voltages associated with lightning strikes
- Prolongation of contact life
- Protection in industrial switching circuits

Zenamic voltage suppressors are metal oxide varistors having a non-linear current-voltage characteristic which exhibits an almost constant voltage over a wide range of current. They are ideally suited to all transient voltage protection applications and their high clamping ratios and low steady state power consumption offer considerable circuit advantages over more traditional methods of protection.


Normally the Zenamic idles at a low current level at the nominal voltage. When a transient over-voltage occurs in the circuit, the Zenamic current increases rapidly, its voltage remaining virtually constant. The transient energy is thus absorbed by the Zenamic and the associated circuit impedances.

V-I characteristics

ZENAMIC has the forward-reverse symmetrical electrical characteristics as shown in the figure 1. The voltage-current curves show the varistor characteristics in the range $1 \mu\text{A}$ to 10^4A , and show the resistance characteristics for the range under $1 \mu\text{A}$ and over 10^4A in the figure 2. The voltage across terminals when test current (I_t : 1 mA) is applied to ZENAMIC is a standard varistor voltage (V_z), and the voltage across terminals when a standard surge (I_p) is applied represents the maximum suppression voltage (V_c).


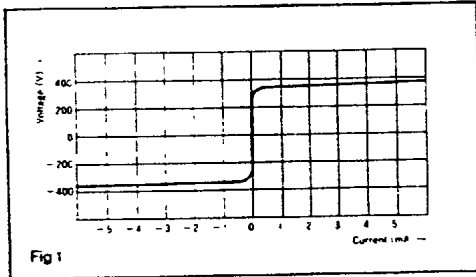


Power derating

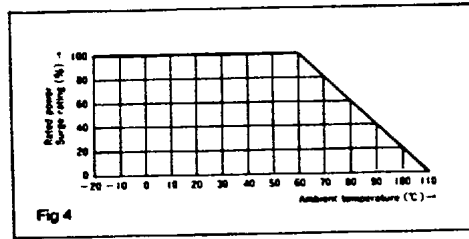

Surge waveform

A surge waveform varies according to the sources. An EXP waveform is used for surge testing of ZENAMIC, while a AC half-wave is used for the energy absorption test. The EXP waveform reaches its peak voltage (current) at $[t_a]$ as shown in the figure 5, and then decreases as time passes and reaches half of the peak voltage (current) at $[t_b]$. This type of the EXP waveform is shown as a $[t_a/t_b]$ voltage (current) waveform. For surge testing of ZENAMIC, the $8/20 \mu\text{sec}$ current waveform is used.

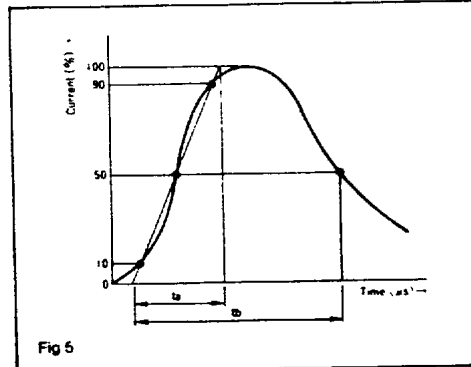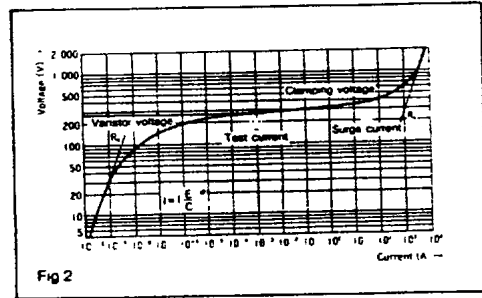


Temperature Characteristics


In the small current range, Zenamic features outstanding temperature characteristics. A shunt resistance R_p of metal oxide varistor has the temperature characteristics which is determined by the following equation.

$$R_p = A e^{E_g/2kT} \quad (2)$$

- T: Absolute temperature
- k: Boltzmann constant
- A, E_g : constants

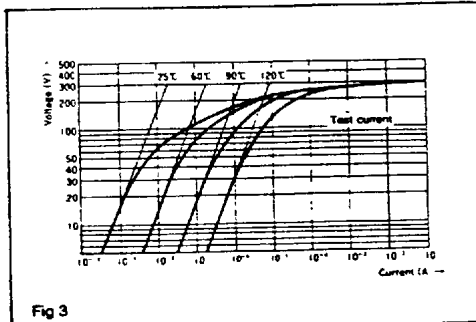



Type No.

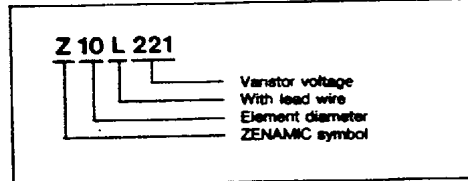



Application

A few examples show. Power lines and surge absorption units with error display (SA series).


Line to Line protection



Line to Line and Line to Ground protection

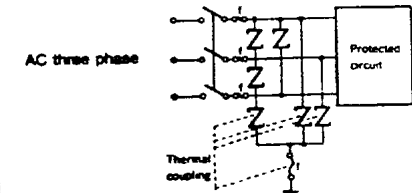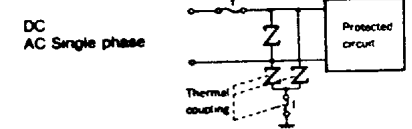

Switching surge protection Semiconductor protection Contact spark suppression

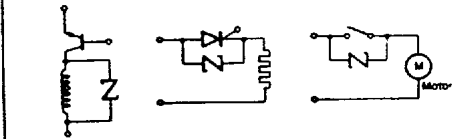


Z7L Series


Specifications

Type No.	Varistor voltage V_{Vrms} (V)		Maximum allowable voltage		Maximum clamping voltage V	Rated wattage W	Energy (2ms) J	Withstanding Surge current (8/20 μ s)		Typical capacitance (@ 1kHz) pF
			AC	DC				1 Time	2 Times	
	Min	Max	V_{Vrms}	V						
Z7L180	18 (16~20)		11	14	36 at 2.5A	0.02	0.8	250A	125A	3,500
Z7L220	22 (20~24)		14	18	43		0.9			2,800
Z7L270	27 (24~30)		17	22	53		1.0			2,000
Z7L330	33 (30~36)		20	26	65		1.2			1,500
Z7L390	39 (35~43)		25	31	77		1.5			1,350
Z7L470	47 (42~52)		30	38	93		1.8			1,150
Z7L580	56 (50~62)		35	45	110		2.2			950
Z7L680	68 (61~75)		40	56	135		2.5			700
Z7L820	82 (74~90)		50	65	135 at 10A	3.5	550	1200A	600A	550
Z7L101	100 (90~110)		60	85	165	4.0	500			
Z7L121	120 (108~132)		75	100	200	5.0	450			
Z7L151	150 (135~165)		95	125	250	6.0	350			
Z7L181	180 (162~198)		110	145	300	10.0	300			
* Z7L201	200 (185~225)		130	170	340	10.0	250			
* Z7L221	220 (198~242)		140	180	360	10.0	250			
* Z7L271	270 (247~303)		175	225	455	12.0	170			
* Z7L331	330 (297~363)		210	275	550	15.0	150			
* Z7L361	360 (324~396)		230	300	595	15.0	130			
* Z7L381	390 (351~429)		250	320	650	17.0	130			
* Z7L431	430 (387~473)		275	350	710	20.0	110			
* Z7L471	470 (423~517)		300	385	775	20.0	100			

V-I characteristics

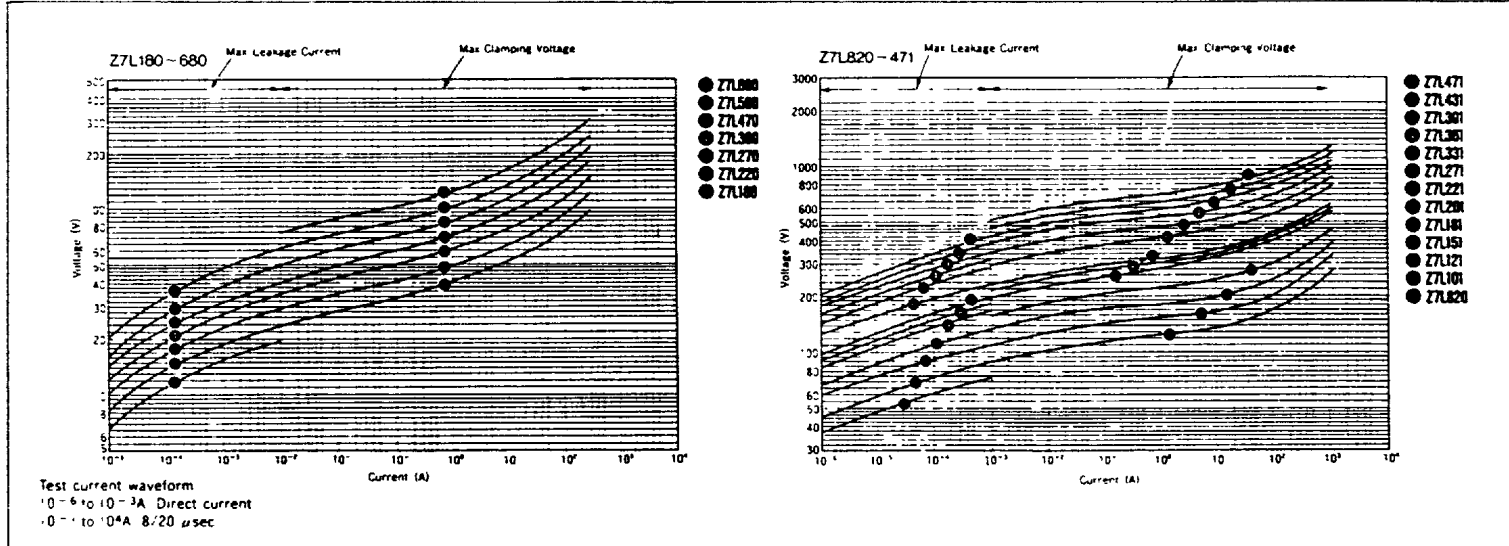

Surge Life Time Ratings (Relation between impulse width and surge repetition time)

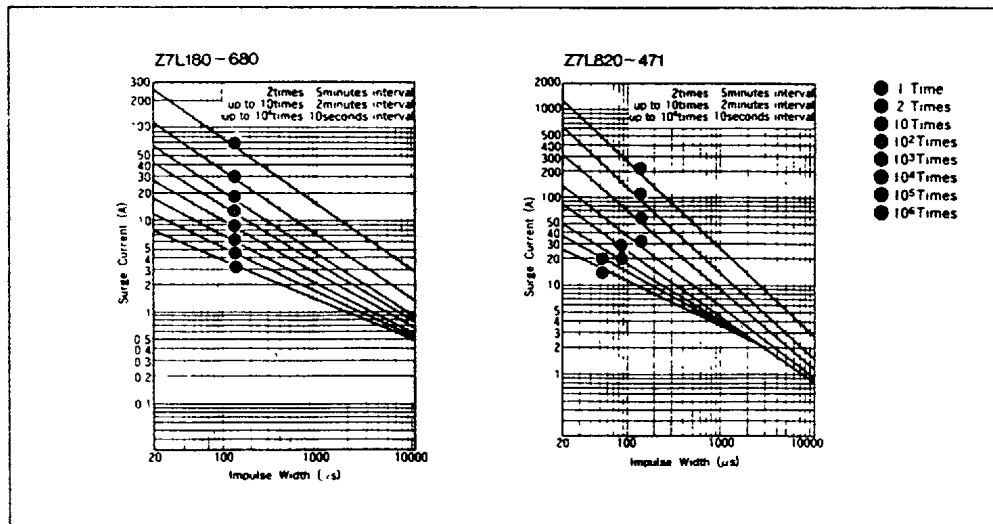


- 1 Operating temperature range -40 to 85 °C
- 2 Storage temperature range -40 to 125 °C
- 3 * UL approved model

Z10L Series


Specifications

Type No.	Varistor voltage V_{1mA} (V)		Maximum allowable voltage		Maximum clamping voltage V	Rated wattage W	Energy (Jms) J	Withstanding Surge Current (8/20 μ s)		Typical capacitance (@ 1kHz) pF
			AC	DC				1 Time	2 Times	
	Min	Max	V_{rms}	V						
Z10L180	18 (16~20)		11	14	36 at 5A	0.05	1.5	500A	250A	7,500
Z10L220	22 (20~24)		14	18	43		2.0			6,000
Z10L270	27 (24~30)		17	22	53		2.5			4,000
Z10L330	33 (30~36)		20	26	65		3.0			3,000
Z10L390	39 (35~43)		25	31	77		3.5			2,600
Z10L470	47 (42~52)		30	38	93		4.5			2,200
Z10L560	56 (50~62)		35	45	110		5.5			1,800
Z10L680	68 (61~75)		40	56	135		6.5			1,300
Z10L820	82 (74~90)		50	65	135 at 25A	8	1,800	2500A	1250A	1,400
Z10L101	100 (90~110)		60	85	165	10	1,100			
Z10L121	120 (108~132)		75	100	200	12	900			
Z10L151	150 (135~165)		95	125	250	16	700			
Z10L181	180 (162~198)		110	145	300	18	500			
*Z10L201	200 (185~225)		130	170	340	20	450			
*Z10L221	220 (198~242)		140	180	360	23	350			
Z10L271	270 (247~303)		175	225	455	30	270			
Z10L331	330 (297~363)		210	275	560	33	230			
Z10L361	360 (324~396)		230	300	595	36	330			
Z10L391	390 (351~429)		250	320	650	40	300			
Z10L431	430 (387~473)		275	350	710	45	270			
Z10L471	470 (423~517)		300	385	775	45	250			
Z10L561	560 (504~616)		350	460	925	45	230			
Z10L681	680 (612~748)		420	560	1,120	45	150			
Z10L751	750 (675~825)		460	615	1,240	50	130			
Z10L821	820 (738~902)		510	670	1,355	56	110			
Z10L911	910 (819~1,001)		550	745	1,500	60	100			
*Z10L102	1,000 (900~1,100)		625	825	1,650	65	90			

V-I characteristics

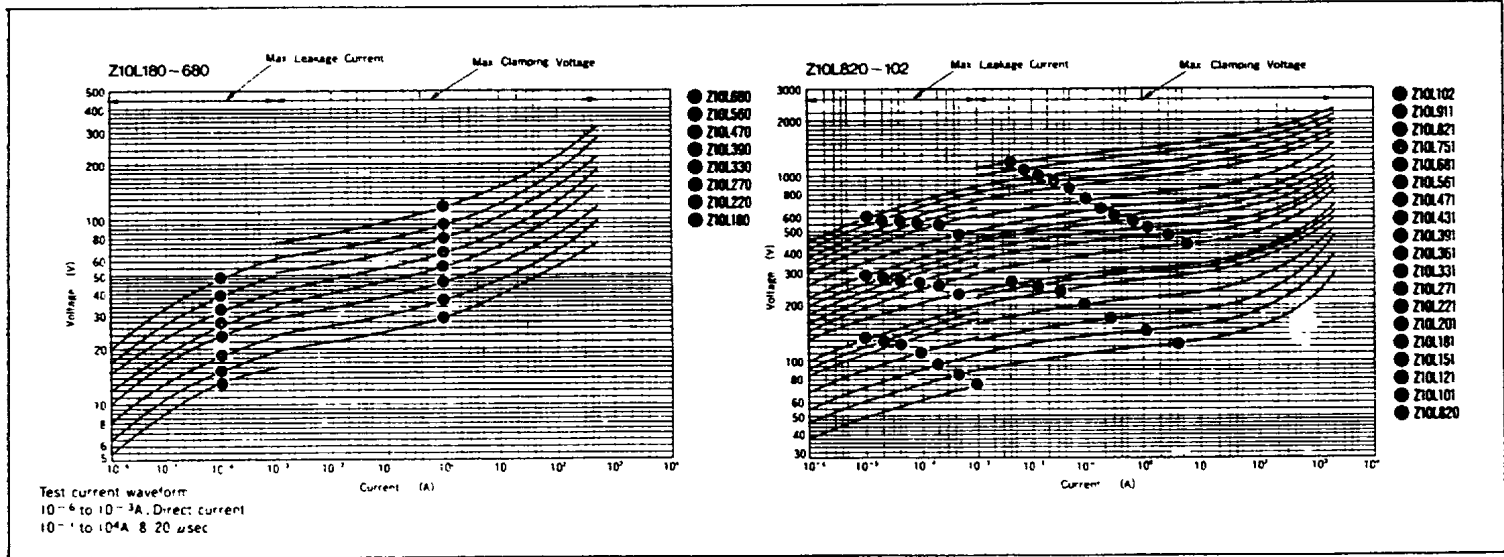

Surge Life Time Ratings (Relation between impulse width and surge repetition time)

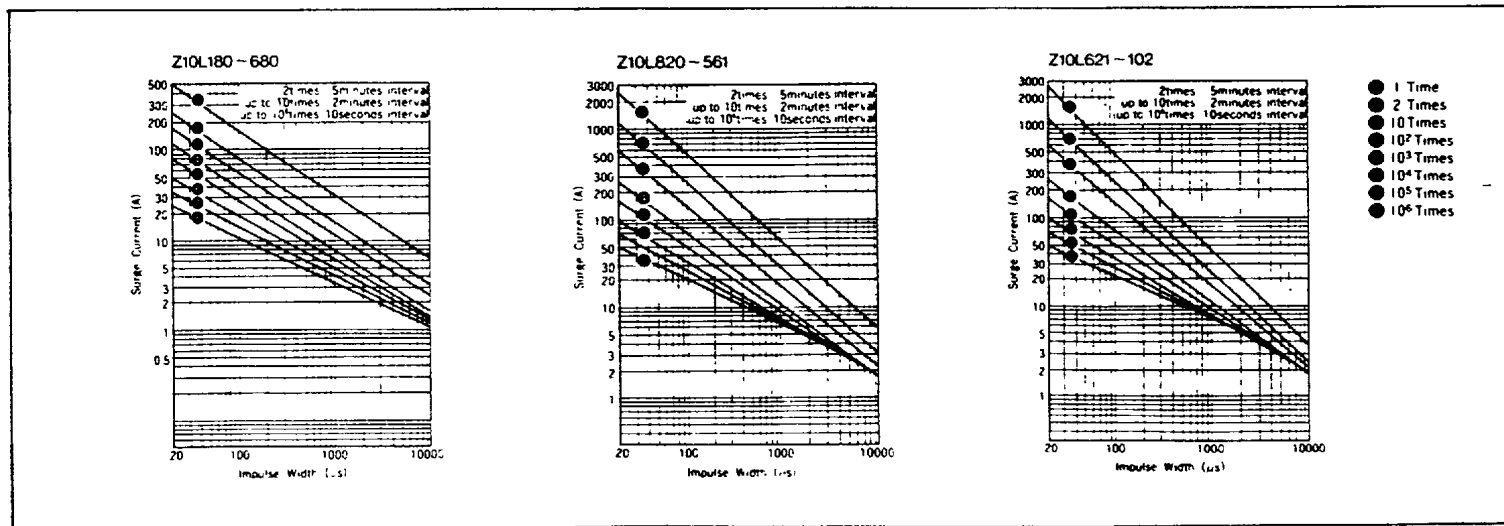


1. Operating temperature range -40 to 85 °C
2. Storage temperature range -40 to 125 °C
3. * : UL approved model

Z15L Series


Specifications

Type No.	Varistor voltage V_{1mA} (V)		Maximum allowable voltage		Maximum clamping voltage	Rated wattage	Energy (2ms)	Withstanding Surge current (①/20 μ s)		Typical capacitance (① 1kHz)
			AC	DC				1 Time	2 Times	
	Min	Max	V_{rms}	V	V	W	J			pF
Z15L180	18 (16~20)		11	14	36 at 10A	0.1	3.5	1000A	500A	18,000
Z15L220	22 (20~24)		14	18	43		4.0			15,000
Z15L270	27 (24~30)		17	22	53		5.0			10,000
Z15L330	33 (30~36)		20	26	65		6.0			7,500
Z15L360	36 (35~43)		25	31	77		7.0			6,500
Z15L470	47 (42~52)		30	38	93		8.5			5,500
Z15L560	56 (50~62)		36	45	110		10.0			4,500
Z15L680	68 (61~75)		40	56	135		12.0			3,300
Z15L820	82 (74~90)		50	65	135 at 50A	0.6	14	4500A	2500A	2,900
Z15L101	100 (90~110)		60	85	165		18			2,400
Z15L121	120 (108~132)		75	100	200		20			1,900
Z15L151	150 (135~165)		95	125	250		25			1,500
Z15L181	180 (162~198)		110	145	300		30			1,200
Z15L201	200 (185~225)		130	170	340		35			1,000
Z15L221	220 (198~242)		140	180	360		40			1,000
Z15L271	270 (247~303)		175	225	455		50			750
Z15L331	330 (297~363)		210	275	550		60			650
Z15L361	360 (324~396)		230	300	595		65			550
Z15L391	390 (351~429)		250	320	650		70			500
Z15L431	430 (387~473)		275	350	710		75			450
Z15L471	470 (423~517)		300	385	775		80			400
Z15L561	560 (504~616)		350	460	925		80			300
Z15L681	680 (612~748)		420	560	1,120		80			250
Z15L751	750 (675~825)		460	615	1,240		100			230
Z15L821	820 (738~902)		510	670	1,355		110			200
Z15L911	910 (819~1,001)		550	745	1,500		120			180
Z15L102	1,000 (900~1,100)		625	825	1,650	130	150			

V-I characteristics

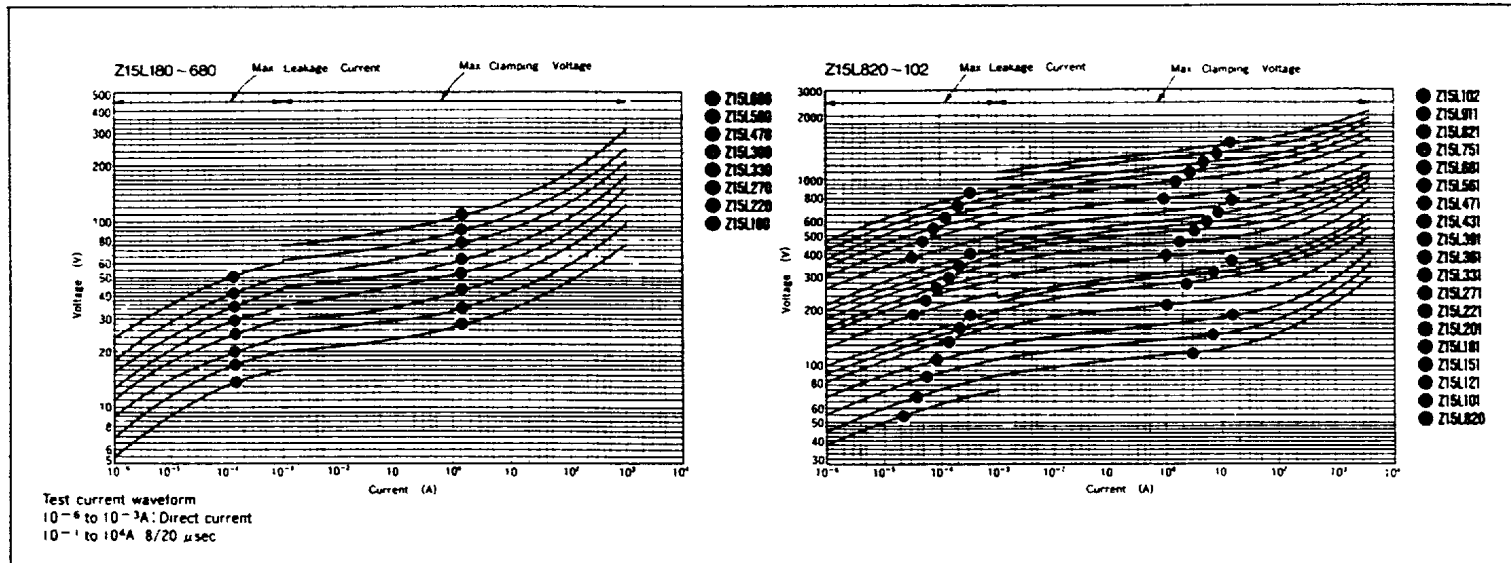

Surge Life Time Ratings (Relation between impulse width and surge repetition time)

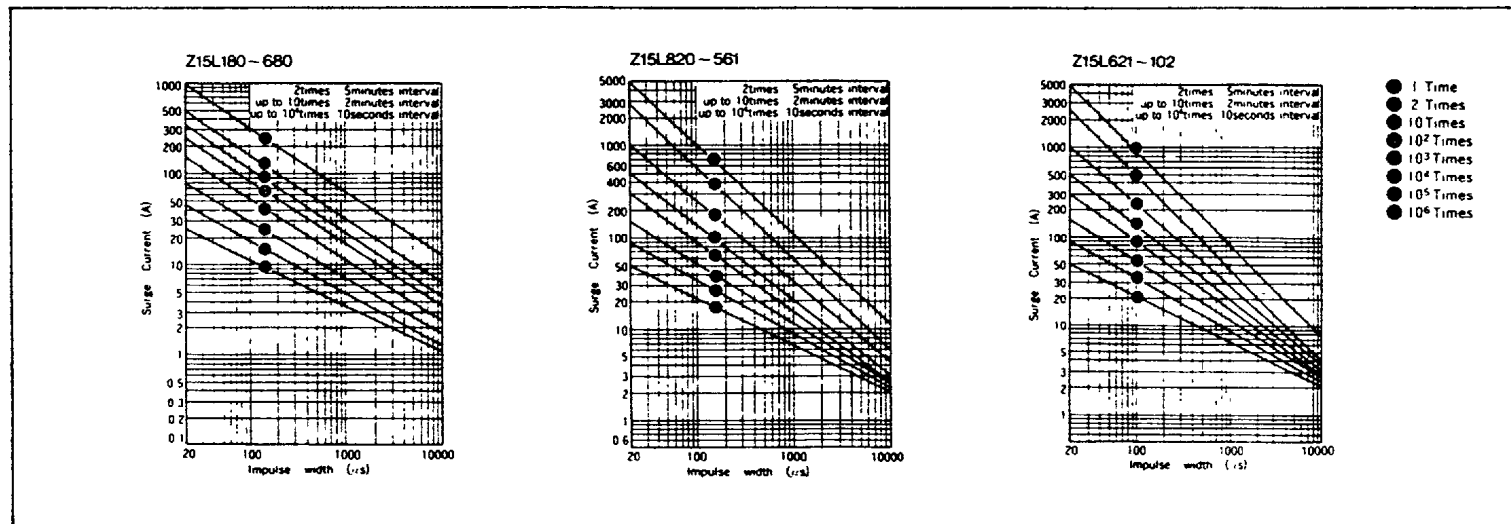


1. Operating temperature range: -40 to 85 °C
2. Storage temperature range: -40 to 125 °C
3. *: UL approved model

Z21L Series


Specifications

Type No.	Varistor voltage V_{VMA} (V)		Maximum allowable voltage		Maximum clamping voltage	Rated wattage	Energy (Jms)	Withstanding Surge current (8/20 μ s)		Typical capacitance (@ 1kHz)
			AC	DC				1 Time	2 Time	
	Min	Max	V_{rms}	V	V	W	J			μ F
Z21L180	18	16 ~ 20	11	14	36 at 20A	0.2	10	2000A	1000A	37,000
Z21L220	22	20 ~ 24	14	18	43		13			30,000
Z21L270	27	24 ~ 30	17	22	53		15			22,000
Z21L330	33	30 ~ 36	20	26	65		20			17,000
Z21L390	39	35 ~ 43	25	31	77		24			15,000
Z21L470	47	42 ~ 52	30	38	93		30			13,000
Z21L560	56	50 ~ 62	36	45	110		35			11,000
Z21L680	68	61 ~ 75	40	56	135		40			7,000
Z21L820	82	74 ~ 90	50	65	135 at 100A	1.0	27	6500A	4000A	5,500
Z21L101	100	90 ~ 110	60	85	165		30			4,800
Z21L121	120	108 ~ 132	75	100	200		40			3,800
Z21L151	150	135 ~ 165	95	125	250		50			3,000
Z21L181	180	162 ~ 198	110	145	300		65			2,500
* Z21L201	200	185 ~ 225	130	170	340		75			2,000
* Z21L221	220	198 ~ 242	140	180	390		70			1,800
* Z21L271	270	247 ~ 303	175	225	455		90			1,600
* Z21L331	330	297 ~ 363	210	275	550		110			1,400
* Z21L361	360	324 ~ 396	230	300	595		120			1,200
* Z21L391	390	351 ~ 429	250	320	650		130			1,000
* Z21L431	430	387 ~ 473	275	350	710		140			900
* Z21L471	470	423 ~ 517	300	385	775		150			800
* Z21L561	560	504 ~ 616	350	460	925		160			600
* Z21L681	680	612 ~ 748	420	560	1,120		175			460
* Z21L751	750	675 ~ 825	460	615	1,240		190			420
* Z21L821	820	738 ~ 902	510	670	1,355	215	400			
* Z21L911	910	819 ~ 1,001	550	745	1,500	230	350			
* Z21L102	1,000	900 ~ 1,100	625	825	1,650	230	320			

V-I characteristics

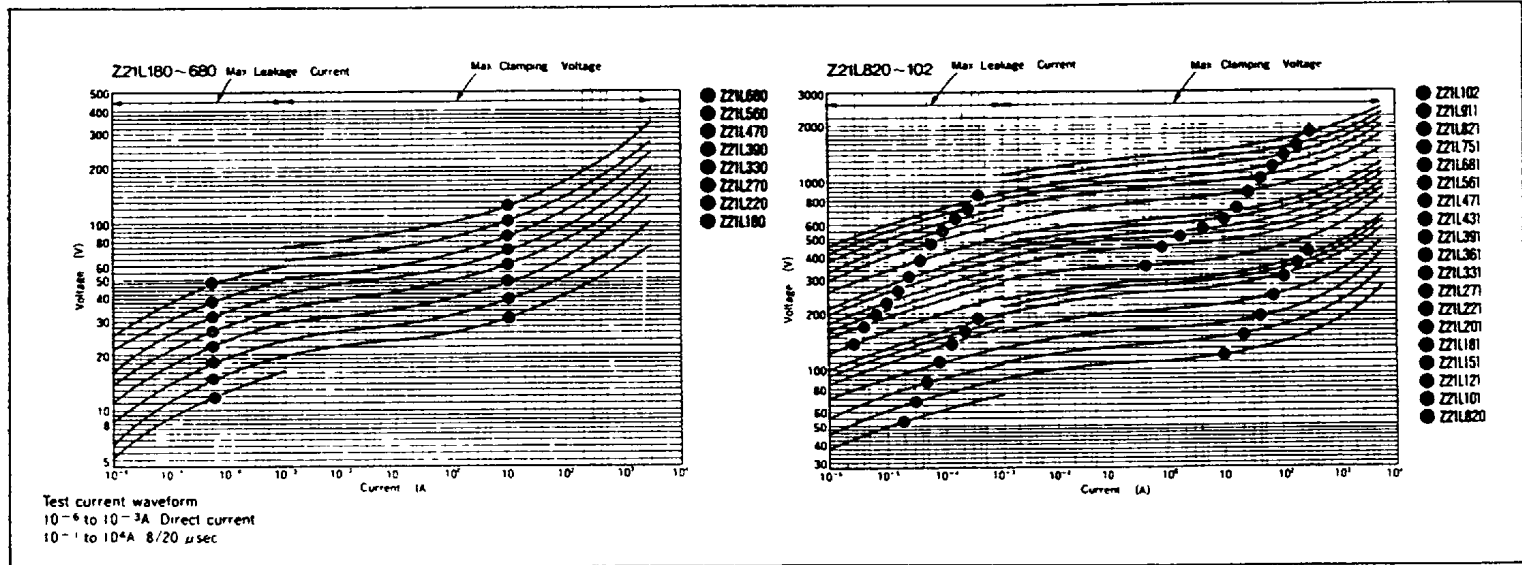

Surge Life Time Ratings (Relation between impulse width and surge repetition time)

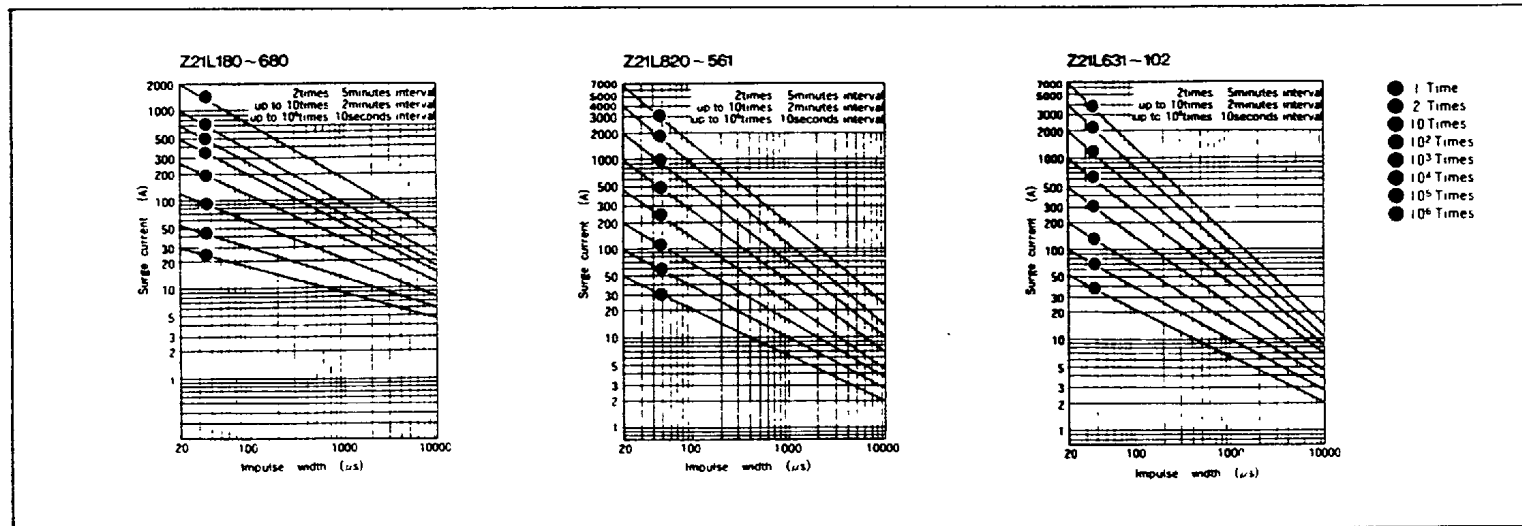

1. Operating temperature range: -40 to 85 °C
2. Storage temperature range: -40 to 125 °C
- 3 * : UL approved model

Z25M, Z33M Series

25


Specifications

Type No.	Varistor voltage V_{VMA} (V)		Maximum allowable voltage		Maximum clamping voltage V	Rated wattage W	Energy (2ms) J	Withstanding Surge Current (8/20 μ s)		Typical capacitance (@ 1kHz) pF
	Min	Max	AC	DC				1 Time	2 Times	
			V_{rms}	V						
Z25M221S	220 (187 ~ 253)	120	165	380 at 100A	1.0	125	15000A	10000A	3300	
Z25M271S	270 (229.5 ~ 310.5)	150	210	465						
Z25M331S	330 (280.5 ~ 379.5)	175	245	570						
Z25M391S	390 (331.5 ~ 448.5)	210	295	675						
Z25M441S	440 (374 ~ 506)	240	335	780						
Z25M471S	470 (399.5 ~ 540.5)	250	350	810						
Z25M561S	560 (476 ~ 644)	300	420	970						
Z25M681S	680 (578 ~ 782)	365	510	1,175						
Z25M821S	820 (697 ~ 943)	440	615	1,415						
Z25M102S	1000 (850 ~ 1,150)	520	730	1,725						
Z33M221S	220 (187 ~ 253)	120	165	380 at 100A	1.2	200	25000A	20000A	6500	
Z33M271S	270 (229.5 ~ 310.5)	150	210	465						
Z33M331S	330 (280.5 ~ 379.5)	175	245	570						
Z33M391S	390 (331.5 ~ 448.5)	210	295	675						
Z33M441S	440 (374 ~ 506)	240	335	780						
Z33M471S	470 (399.5 ~ 540.5)	250	350	810						
Z33M561S	560 (476 ~ 644)	300	420	970						
Z33M681S	680 (578 ~ 782)	365	510	1,175						
Z33M821S	820 (697 ~ 943)	440	615	1,415						
Z33M102S	1000 (850 ~ 1,150)	520	730	1,725						

1. Operating temperature range: -40 to 85 °C


2. Storage temperature range: -40 to 125 °C

Dimensions

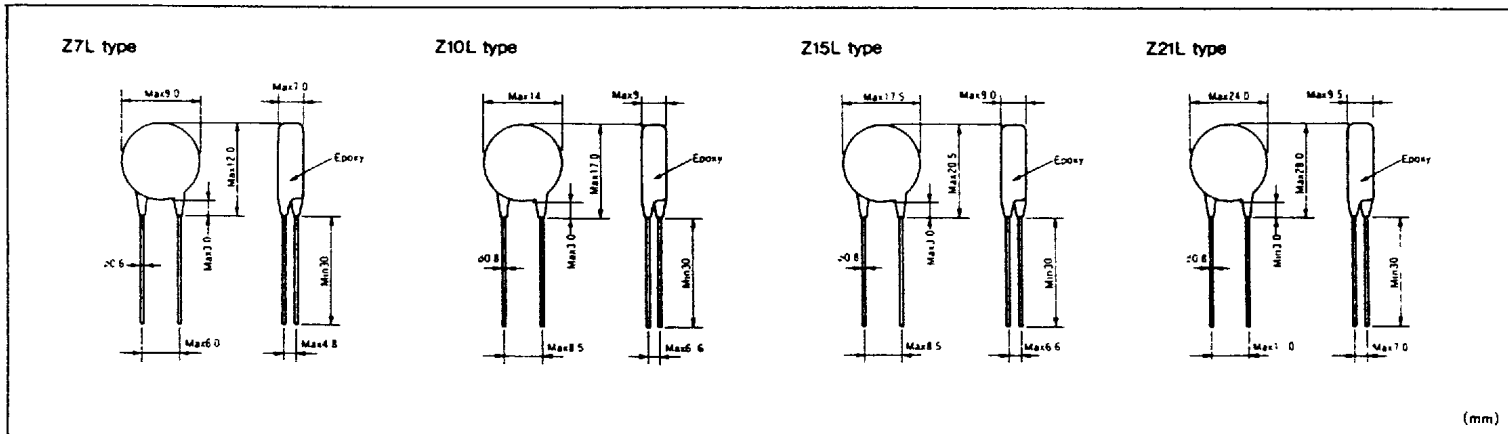


(mm)

Dimensions

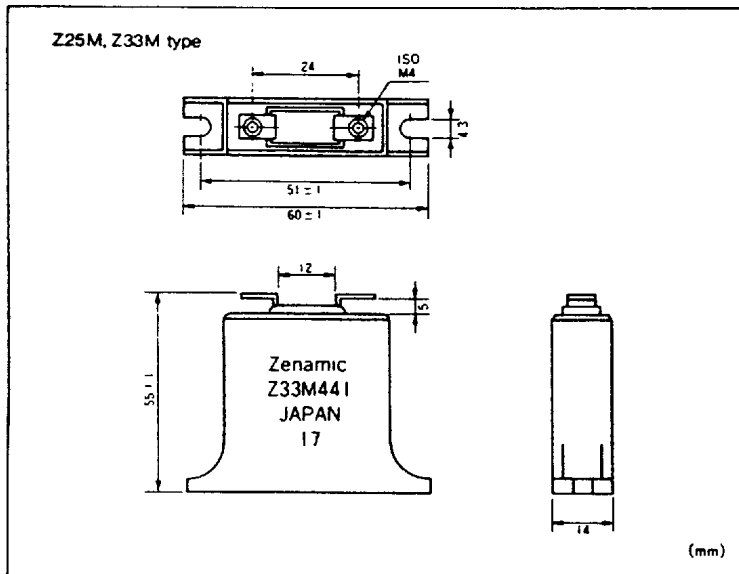

(mm)

Taping

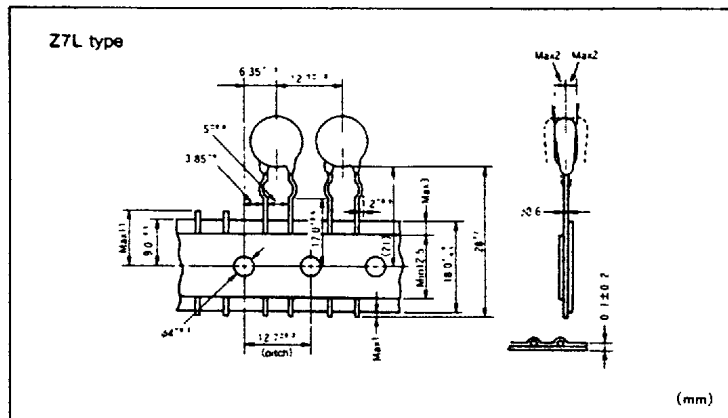

(mm)