


FEATURES

- -55°C to +125°C operation
- 16 to 40 VDC input
- Surface mountable
- Will withstand solder reflow
- Transient protection up to 80V/120 ms, meets MIL-STD-704A requirements
- Inhibit function
- Fully isolated
- Ultra-wide bandwidth magnetic feedback
- Up to 82% efficiency
- Indefinite short circuit protection
- Undervoltage shutdown below 10 Vin

DC/DC CONVERTERS 28 VOLT INPUT

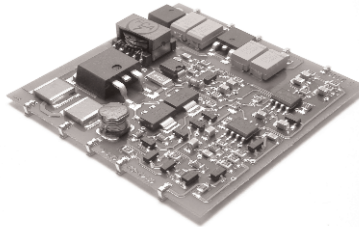

MSM SERIES 5 WATT

MODELS VDC OUTPUT	
SINGLES	DUALS
3.3	±12
5	±15
12	
15	

Size (max.): 2.01 x 2.01 x 0.312 inches (51.1 x 51.1 x 7.9 mm)
Weight: 20 grams maximum

DESCRIPTION

The MSM Series™ of DC/DC converters delivers up to 5 watts in a surface mountable package. The use of commercially available discrete components, printed wiring board construction, and surface mount technology keep costs low. Mature design technology and severe derating maintain high-reliability, providing full power operation over the full military temperature range of -55 to +125°C.

Output voltages of 3.3, 5, 5.2, 12, 15, ±12, or ±15 operate from an input range of 16 to 40 VDC. Operation below 16 volts is possible at reduced power while still maintaining output regulation. The converters are rated for input transients up to 80 V for up to 120 milliseconds which meets the requirements for MIL-STD-704A.

CONVERTER DESIGN

The converters incorporate a flyback topology with a constant frequency to minimize EMI and noise. The pulse-width-modulator is constructed of discrete devices to allow to the use of mature technologies and assure operation over the full temperature range. A proprietary magnetic isolator, designed with feed-forward and load correction, provides nearly instantaneous output control for good output regulation.

INHIBIT FUNCTION

MSM Series converters provide a TTL open collector-compatible inhibit feature that can be used to disable internal switching and inhibit the unit's output. Inhibiting in this manner results in low standby current, and no generation of switching noise.

The converter is inhibited when the TTL compatible low (≤ 0.8 V) is applied to the inhibit pin. The unit is enabled when the pin, which is internally connected to a pull-up resistor, is left unconnected or is connected to an open collector gate. The open circuit output voltage associated with the inhibit pin is 9 to 11 V. In the inhibit mode, a maximum of 0.5 mA must be sunk from the inhibit pin.

PROTECTION FEATURES

Undervoltage lockout prevents the MSM Series converters from operating below approximately 10 VDC input. This circuitry can prevent system shutdown problems in starting "constant power" devices at low input voltages. All models include a soft-start function to prevent large current draw and minimize overshoot under all load and line conditions. The MSM Series of converters also provide short circuit and overload protection. Short circuit internal dissipation is lower than the internal dissipation which occurs during full load conditions.

SURFACE MOUNTABLE PACKAGING

The MSM Series of DC/DC converters can be surface mounted or hand-soldered. Maximum reflow temperature for surface mounting the MSM converter is 230°C for a maximum of 30 seconds. SN60, 62, or 63 are the recommended types of solder. Hand soldering should not exceed 300°C for 10 seconds per pin.

MSM SERIES 5 WATT

DC/DC CONVERTERS

<p>ABSOLUTE MAXIMUM RATINGS</p> <p>Input Voltage</p> <ul style="list-style-type: none"> • 16 to 40 VDC <p>Output Power</p> <ul style="list-style-type: none"> • 5 W <p>Power Dissipation</p> <ul style="list-style-type: none"> • 1.9 W <p>Lead Soldering Temperature (10 sec per lead)</p> <ul style="list-style-type: none"> • 300°C <p>Storage Temperature Range (Base plate)</p> <ul style="list-style-type: none"> • -55°C to +130°C 	<p style="text-align: center;">INHIBIT</p> <p>Inhibit – TTL Open Collector</p> <ul style="list-style-type: none"> • Logic low (output disabled) • Inhibit pin current 0.34 mA typ • Referenced to input common • Logic high (output enabled) open collector 	<p style="text-align: center;">TYPICAL CHARACTERISTICS</p> <p>Output Voltage Temperature Coefficient</p> <ul style="list-style-type: none"> • 200 ppm/°C typical <p>Temperature Rise (Still Air)</p> <ul style="list-style-type: none"> • 18°C / watt dissipated, typical <p>Input to Output Capacitance</p> <ul style="list-style-type: none"> • 100 pF typical <p>Undervoltage Lockout</p> <ul style="list-style-type: none"> • 10 V input typical <p>Current Limit</p> <ul style="list-style-type: none"> • 160% of full load typical <p>Isolation</p> <ul style="list-style-type: none"> • 100 megohm minimum at 500 V <p>Conversion Frequency (kHz)</p> <ul style="list-style-type: none"> • 25°C, 200 min, 300 typ, 400 max <p>Inhibit Pin Voltage (unit enabled)</p> <ul style="list-style-type: none"> • 10 V, typical
<p style="text-align: center;">RECOMMENDED OPERATING CONDITIONS</p> <p>Input Voltage Range</p> <ul style="list-style-type: none"> • 16 to 40 VDC continuous • 80 V for 120 msec transient <p>Case Operating Temperature (Tc)</p> <ul style="list-style-type: none"> • -55°C to +125°C full power • -55°C to +130°C absolute <p>Derating Output Power/Current (Tc)</p> <ul style="list-style-type: none"> • Linearly from 100% at 125°C to 0% at 130°C 		

Electrical Characteristics: 25°C Tc, 28 VDC Vin, 100% load, unless otherwise specified.

PARAMETER	CONDITIONS	MSM283R3S			MSM2805S			MSM2812S			MSM2815S			UNITS
		MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	MIN	TYP	MAX	
OUTPUT VOLTAGE	Tc = 25°C	3.25	3.3	3.35	4.93	5	5.08	11.82	12	12.18	14.78	15	15.23	VDC
OUTPUT CURRENT	V _{IN} = 16 TO 40 VDC	—	1.52	—	—	1.0	—	—	0.42	—	—	0.33	—	A
OUTPUT POWER	V _{IN} = 16 TO 40 VDC	0	—	5	0	—	5	0	—	5	0	—	5	W
OUTPUT RIPPLE VOLTAGE	10 kHz - 2 MHz Tc = -55°C TO +125°C	—	250	—	—	200	—	—	180	—	—	150	—	mV p-p
LINE REGULATION	V _{IN} = 16 TO 40 VDC	—	60	—	—	80	—	—	120	—	—	150	—	mV
LOAD REGULATION	NO LOAD TO FULL	—	150	—	—	250	—	—	350	—	—	400	—	mV
INPUT VOLTAGE	CONTINUOUS	16	28	40	16	28	40	16	28	40	16	28	40	VDC
NO LOAD TO FULL	TRANSIENT 120 ms	0	—	80	0	—	80	0	—	80	0	—	80	V
INPUT CURRENT	NO LOAD	—	28	—	—	25	—	—	20	—	—	16	—	mA
	FULL LOAD	—	242	—	—	235	—	—	230	—	—	223	—	
	INHIBITED	—	4.5	—	—	4.5	—	—	4.5	—	—	4.5	—	
INPUT RIPPLE CURRENT	10k Hz - 10 MHz Tc = -55°C TO +125°C	—	30	—	—	25	—	—	20	—	—	15	—	mA p-p
		—	180	—	—	150	—	—	120	—	—	100	—	
EFFICIENCY	Tc = 25°C	—	74	—	—	76	—	—	78	—	—	80	—	%
LOAD FAULT	POWER DISSIPATION OVERLOAD	—	1.9	—	—	1.8	—	—	1.7	—	—	1.5	—	W
	SHORT CIRCUIT ¹	—	1	—	—	0.9	—	—	0.8	—	—	0.7	—	
	RECOVERY ²	—	9	—	—	8.5	—	—	8	—	—	7.5	—	ms
	OUTPUT CURRENT TRIP POINT	—	2.2	—	—	1.5	—	—	0.7	—	—	0.56	—	A
	SHORT CIRCUIT	—	2.3	—	—	1.6	—	—	0.8	—	—	0.6	—	
STEP LOAD RESPONSE	50 %–100%–50% TRANSIENT ³	—	350	—	—	350	—	—	400	—	—	400	—	mV pk
	RECOVERY ²	—	0.8	—	—	0.8	—	—	1.0	—	—	1.0	—	
STEP LINE RESPONSE	16 TO 40 TO 16 V _{IN} TRANSIENT ³	—	400	—	—	400	—	—	500	—	—	500	—	mV pk
	RECOVERY ²	—	1.5	—	—	1.5	—	—	2.0	—	—	2.0	—	
START-UP	DELAY	—	4	—	—	4	—	—	4	—	—	4	—	ms
0 TO 28 VIN	OVERSHOOT	—	250	—	—	300	—	—	350	—	—	400	—	mV pk

Notes:

1. Short circuit is measured with a 50 mohm resistive load.
2. Time to settle within 1% of V_{OUT}
3. Transition ≥ 10 μs.

DC/DC CONVERTERS

MSM SERIES 5 WATT

Electrical Characteristics: 25°C Tc, 28 VDC Vin, 100% load, unless otherwise specified.



DUAL OUTPUT MODELS		MSM2812D			MSM2815D			UNITS
PARAMETER	CONDITIONS	MIN	TYP	MAX	MIN	TYP	MAX	
OUTPUT VOLTAGE	Tc = 25°C	±11.82	±12	±12.18	±14.78	±15	±15.23	VDC
OUTPUT CURRENT	V _{IN} = 16 TO 40 VDC	0	±208	—	0	±167	—	mA
OUTPUT POWER ¹	V _{IN} = 16 TO 40 VDC	0	—	5	0	—	5	W
OUTPUT RIPPLE VOLTAGE	+V _{OUT}	—	180	—	—	150	—	mV p-p
	-V _{OUT}	—	180	—	—	150	—	
	Tc = -55°C TO +125°C	—	1200	—	—	1000	—	
	Tc = -55°C TO +125°C	—	1200	—	—	1000	—	
LINE REGULATION	+V _{OUT}	—	120	—	—	150	—	mV
V _{IN} = 16 TO 40 VDC	-V _{OUT}	—	120	—	—	150	—	
LOAD REGULATION	+V _{OUT}	—	350	—	—	400	—	mV
NO LOAD TO FULL	-V _{OUT}	—	350	—	—	400	—	
INPUT VOLTAGE	CONTINUOUS	16	28	40	16	28	40	VDC
NO LOAD TO FULL	TRANSIENT 120 ms	0	—	80	0	—	80	V
INPUT CURRENT	NO LOAD	—	20	—	—	16	—	mA
	FULL LOAD	—	230	—	—	220	—	
	INHIBITED	—	4.5	—	—	4.5	—	
INPUT RIPPLE CURRENT	10 kHz - 2 MHz	—	20	—	—	15	—	mA p-p
	Tc = -55°C TO +125°C	—	120	—	—	100	—	
EFFICIENCY		—	80	—	—	82	—	%
LOAD FAULT	POWER DISSIPATION							W
	OVERLOAD	—	1.7	—	—	1.5	—	
	SHORT CIRCUIT ²	—	0.8	—	—	0.7	—	
	RECOVERY ³	—	8.0	—	—	7.5	—	ms
	OUTPUT CURRENT							mA
TRIP POINT	—	350	—	—	280	—		
STEP LOAD RESPONSE ± V _{OUT}	50 %-100%- 50% TRANSIENT ⁴	—	400	—	—	400	—	mV pk
	RECOVERY ³	—	1	—	—	1	—	ms
	16 TO 40 TO 16 V _{IN} TRANSIENT ⁴	—	500	—	—	500	—	mV pk
STEP LINE RESPONSE ± V _{OUT}	RECOVERY ³	—	2	—	—	2	—	ms
	DELAY	—	4	—	—	3.5	—	ms
	OVERSHOOT	—	350	—	—	400	—	mV pk

Notes:

1. The maximum specification indicates the converter's total output power, Up to 75% of the total is available from either output providing the other output maintains a minimum of 25% of the total power.
2. Short circuit is measured with a 50 mohm resistive load.
3. Time to settle within 1% of V_{OUT}
4. Transition ≥ 10 μs.


**MSM SERIES
5 WATT**

DC/DC CONVERTERS

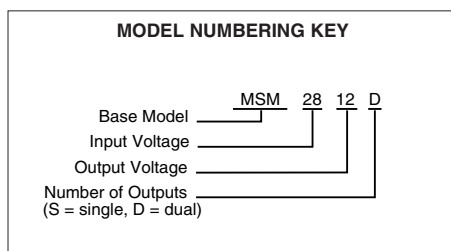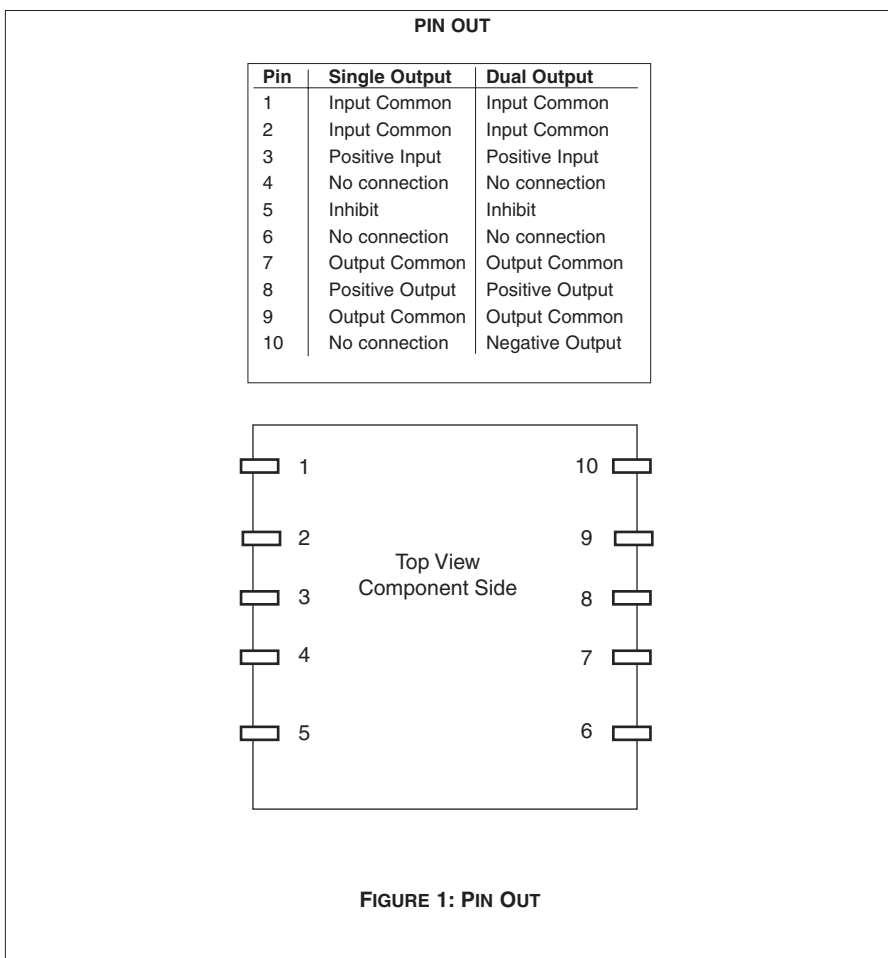

DC/DC CONVERTERS

MSM SERIES 5 WATT

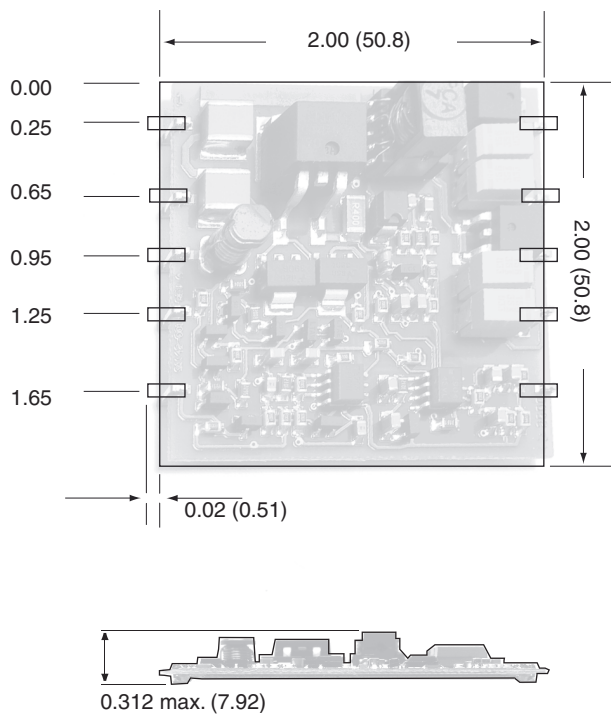

Case dimensions in inches (mm)

Tolerance ± 0.005 (0.13) for three decimal places, ± 0.01 (0.3) for two decimal places unless otherwise specified. Pin spacing tolerance is ± 0.010

CAUTION

Maximum reflow temperature for surface mounting the MSM converter is 230°C for a maximum of 30 seconds. SN60, 62, or 63 are the recommended types of solder. Hand soldering should not exceed 300°C for 10 seconds per pin.

Note: Although every effort has been made to render the case drawings at actual size, variations in the printing process may cause some distortion. Please refer to the numerical dimensions for accuracy.

FIGURE 2: MSM SERIES OUTLINE DRAWING

Contact Information:

www.interpoint.com

Interpoint Headquarters USA
Phone: 1-800-822-8782
+425-882-3100
Email: power@intp.com

Interpoint UK
Phone: +44-1252-815511
Email: poweruk@intp.com

Interpoint France
Phone: +33-134285455
Email: powerfr@intp.com

YOUR NOTES ON INTERPOINT'S NEW PRODUCTS