液晶之友 电话：020-33819057
Http://www.ldfriends.com

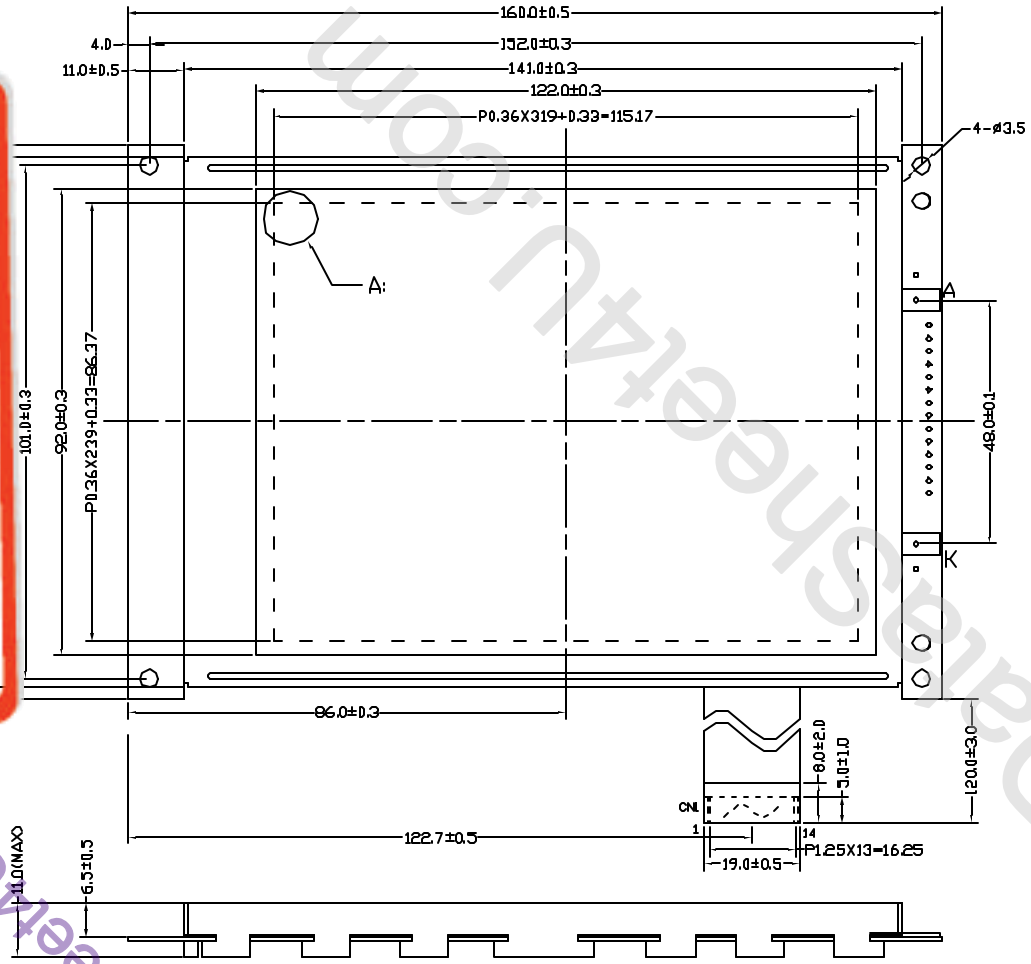

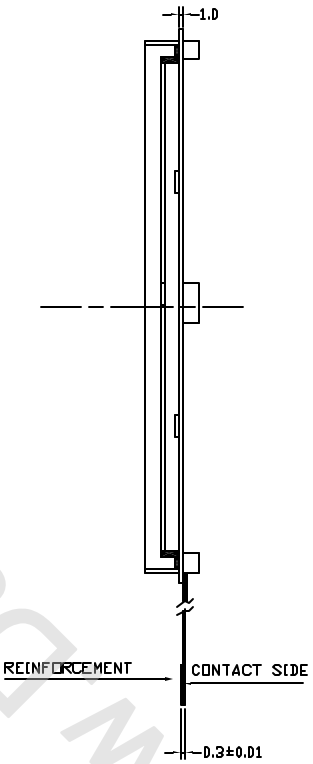

1	D0
2	D1
3	D2
4	D3
5	$\overline{DISP\ OFF}$
6	FLM
7	N.C.
8	LP
9	CP
10	Vcc
11	Vss
12	Vee
13	Vadj
14	FG



NOTES:

1.DISPLAY TYPE:	STN/BLUE
2.VIEWING DIRECTION:	6:00
3.POLARIZER MODE:	TRANSMISSIVE/NEGATIVE
4.OPERATING TEMP:	0°C-+50°C
5.STORAGE TEMP:	-20°C-+60°C
6.LCD OPRATING VOLTAGE:	22.6V Vcc=5V
7.DRIVE METHOD:	1/240 DUTY 1/16 BIAS
8.UNMARKED TOLERANCE:	±0.3mm
9.BACKLIGHT TYPE:	LED(4.0V WHITE)
10.IC:	S6B2086X01-TORA

11.BEZEL IS TO BE PAINTED WITH ZINC(WHITE)

TIAN-MA MICROELECTRONICS CO.
22/F., HANGDU Building, Shennan Road, Central, Shenzhen, China

DRAWN BY:		TITLE: TM320240DFF	
CHECKED BY:			
APPROVED BY:		DWG NO: G-2	SCALE:
CONFIRMED BY:		DWG NAME: TM320240DFFG-2	UNIT: mm SHEET NO:1 OF1

www.Datasheet4U.com