



## Capacitors with Screw Terminals

B43750

Max. Ripple Current – 105 °C

B43770

### Long-life grade capacitors

#### Applications


- Traction
- Electric vehicle (Hybrid)
- Power electronics
- Highly professional power supplies

#### Features

- Max. ripple current capability (up to 100 A)
- High reliability
- Wide temperature range
- All-welded construction ensures reliable electrical contact
- No base insulation for max. cooling  
(insulated solution “2-pad design” upon request)
- Version with low-inductance design available
- Self-extinguishing electrolyte

#### Construction

- Charge-discharge proof, polar
- Aluminum case, partially insulated
- Poles with screw terminal connections
- Mounting with ring clips, clamps or threaded stud



KAL0567-B


B43750

B43770




B43750 / B43770

Max. Ripple Current – 105 °C



**Specifications and characteristics in brief**

Rated voltage $U_R$	350 ... 450 VDC	
Surge voltage $U_S$	$1,1 \cdot U_R$	
Rated capacitance $C_R$	560 ... 5 300 $\mu$ F	
Capacitance tolerance	$\pm 20 \% \triangleq M$	
Leakage current $I_L$ (5 min, 20 °C)	$I_L \leq 0,3 \mu A \cdot \left( \frac{C_R}{\mu F} \cdot \frac{U_R}{V} \right)^{0,7} + 4 \mu A$	
Self-inductance $ESL$	$d = 64,3$ mm: approx. 14 nH $d \geq 76,9$ mm: approx. 18 nH Capacitors with low-inductance design: $d \geq 64,3$ mm: approx. 13 nH	
Useful life 105 °C; $U_R$ ; $I_{-R}$ 85 °C; $U_R$ ; $I_{-R}$ 40 °C; $U_R$ ; $3 \cdot I_{-R}$	> 8 000 h > 40 000 h > 250 000 h	Requirements: $\Delta C/C \leq \pm 30 \%$ of initial value $ESR \leq 3$ times initial specified limit $I_L \leq$ initial specified limit Failure percentage: $\leq 1 \%$ Failure rate: $\leq 20$ fit ( $\leq 20 \cdot 10^{-9}/h$ ) (for definition "fit", refer to chapter "Quality", page 62)
Voltage endurance test 125 °C (at $U_R$ )	2 000 h	Post test requirements: $\Delta C/C \leq \pm 10 \%$ of initial value $ESR \leq 1,3$ times initial specified limit $I_L \leq$ initial specified limit
Vibration resistance	To IEC 60068-2-6, test Fc: displacement amplitude 0,75 mm, frequency range 10 to 55 Hz, acceleration max. 10 g, duration $3 \times 2$ h	
IEC climatic category	To IEC 60068-1: 25/105/56 (– 25 °C/+ 105 °C/56 days damp heat test)	
Detail specification	—	
Sectional specification	IEC 60384-4	




**B43750 / B43770**

**Max. Ripple Current – 105 °C**

**Dimensional drawings**

**Type B43750**  
Ring clip/clamp mounting

**Type B43770**  
Threaded stud mounting

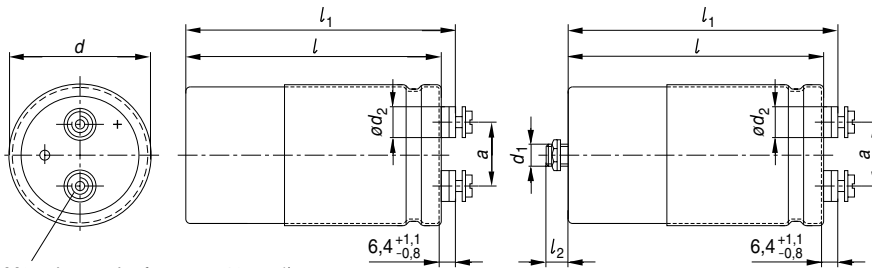

(M6: min. reach of screw = 12 mm\*)  
\*) 8 mm for low-inductance design

KAL0226-Q-E

Positive pole marking: +

**Dimensions and weights**

Terminal	Dimensions (mm) with partly insulating sleeve <sup>1)</sup>							Approx. weight (g)
	<i>d</i>	$l \pm 0,8$	$l_1 \pm 0,8$	$l_2 \begin{smallmatrix} +0 \\ -1 \end{smallmatrix}$	<i>d</i> <sub>1</sub>	<i>d</i> <sub>2</sub> max	$a \begin{smallmatrix} +0,2 \\ -0,4 \end{smallmatrix}$	
M 6	64,3 <sub>+0/-0,8</sub>	80,3	86,0	17	M 12	17,7	28,5	350
M 6	64,3 <sub>+0/-0,8</sub>	105,3	111,0	17	M 12	17,7	28,5	450
M 6	76,9 <sub>+0/-0,7</sub>	105,3	111,0	17	M 12	17,7	31,7	550
M 6	76,9 <sub>+0/-0,7</sub>	142,8	148,5	17	M 12	17,7	31,7	850
M 6	91,0 <sub>+0/-2</sub>	67,1	72,4	17	M 12	17,1	31,7	600
M 6	91,0 <sub>+0/-2</sub>	96,6	101,9	17	M 12	17,7	31,7	800
M 6	91,0 <sub>+0/-2</sub>	144,1	149,4	17	M 12	17,7	31,7	1300

Dimensions are also valid for low-inductance design.

**Packing**

For ecological reasons the packing is pure cardboard.


Capacitor diameter <i>d</i>	Packing units (pieces)
64,3 mm	15
76,9 mm	12
91,0 mm	8

1) Fully insulated versions available upon request.



B43750 / B43770

Max. Ripple Current – 105 °C



### Special designs

- Low-inductance design

Ordering codes:

Design	Identification in 3rd block of ordering code	Remark
Low inductance (13 nH)	M003	For capacitors with diameter $d \geq 64,3$ mm

### Accessories

The following items are included in the delivery package, but are not fastened to the capacitors:

	Thread	Toothed washers	Screws/Nuts	Maximum torque
For terminals	M 6	A 6,4 DIN 6797	Cylinder-head screw M 6 × 12 DIN 85-4.8	2,5 Nm
For mounting	M 12	J 12,5 DIN 6797	Hex nut BM 12 DIN 439	10 Nm

The following must be ordered separately:

Ring clips


B 44 030 (cf. page 169)

Clamps

B 44 030 (cf. page 173)

Insulating parts

B 44 020 (cf. page 166)



**B43750 / B43770**

**Max. Ripple Current – 105 °C**

**Overview of available types**


$U_R$ (VDC)	350	400	450
$C_R$ ( $\mu$ F)	Case dimensions $d \times l$ (mm)		
560			64,3 × 80,3
680			91,0 × 67,1
850		64,3 × 80,3	64,3 × 105,3
1 200	64,3 × 80,3	91,0 × 67,1	76,9 × 105,3
1 300		64,3 × 105,3	91,0 × 96,6
1 500	91,0 × 67,1		
1 800	64,3 × 105,3		
1 900		76,9 × 105,3	76,9 × 142,8
2 400			91,0 × 144,1
2 700	76,9 × 105,3		
2 900		76,9 × 142,8	
3 900	76,9 × 142,8	91,0 × 144,1	
5 300	91,0 × 144,1		

The capacitance and voltage ratings listed above are available in different cases upon request.  
Other voltage and capacitance ratings are also available upon request.



B43750 / B43770


Max. Ripple Current – 105 °C



**Technical data and ordering codes**

$U_R$ VDC	$C_R$ 100 Hz 20 °C $\mu$ F	Case dimensions $d \times l$ mm	$ESR_{max}$ 100 Hz 20 °C mW	$Z_{max}$ 10 kHz 20 °C mW	$I_{\sim max}$ 10 kHz 40 °C A <sup>1)</sup>	$I_{\sim R}$ 10 kHz 105 °C A <sup>1)</sup>	$I_{\sim R(B)}$ 10 kHz 105 °C A <sup>2)</sup>	$I_{\sim R(T+B)}$ 10 kHz 105 °C A <sup>3)</sup>	Ordering code <sup>4)5)</sup>
350	1 200	64,3 × 80,3	67	32	45	9,5	21,8	25,6	B437*0A4128M000
	1 500	91,0 × 67,1	54	26	49	10	28,0	31,1	B437*0A4158M000
	1 800	64,3 × 105,3	45	21	56	12	22,4	28,3	B437*0A4188M000
	2 700	76,9 × 105,3	30	13	75	16	33,0	40,9	B437*0A4278M000
	3 900	76,9 × 142,8	21	9	80	20	33,8	45,7	B437*0A4398M000
	5 300	91,0 × 144,1	16	8	80	26	46,5	59,4	B437*0A4538M000
400	850	64,3 × 80,3	140	110	45	9,5	21,8	25,6	B437*0A9857M000
	1 200	91,0 × 67,1	94	80	49	10,4	28,0	31,1	B437*0A9128M000
	1 300	64,3 × 105,3	87	74	56	12	22,4	28,3	B437*0A9138M000
	1 900	76,9 × 105,3	60	51	75	16	33,0	40,9	B437*0A9198M000
	2 900	76,9 × 142,8	39	34	80	20	33,8	45,7	B437*0A9298M000
	3 900	91,0 × 144,1	29	24	80	26	46,5	59,4	B437*0A9398M000
450	560	64,3 × 80,3	220	180	36	7,7	17,6	20,7	B437*0A5567M000
	680	91,0 × 67,1	180	150	45	9,4	25,3	28,1	B437*0A5687M000
	850	64,3 × 105,3	150	120	44	9,1	17,4	21,9	B437*0A5857M000
	1 200	76,9 × 105,3	100	80	54	11,4	24,0	29,7	B437*0A5128M000
	1 300	91,0 × 96,6	92	73	68	14,3	31,4	37,1	B437*0A5138M000
	1 900	76,9 × 142,8	63	50	74	15,5	26,3	35,6	B437*0A5198M000
	2 400	91,0 × 144,1	50	40	80	20,2	36,3	46,4	B437*0A5248M000

- 1) Ripple current capability with natural cooling
- 2) (B) = ripple current capability with base cooling
- 3) (T+B) = ripple current capability with terminal and base cooling
- 4) \* "5" = for capacitors with ring clip/clamp mounting  
"7" = for capacitors with threaded stud
- 5) For low-inductance design, see page 161.




**B43750 / B43770**

**Max. Ripple Current – 105 °C**

**Useful life**

depending on temperature  $T_A, T_B, T_{T+B}$  under ripple current operating conditions<sup>1)</sup>

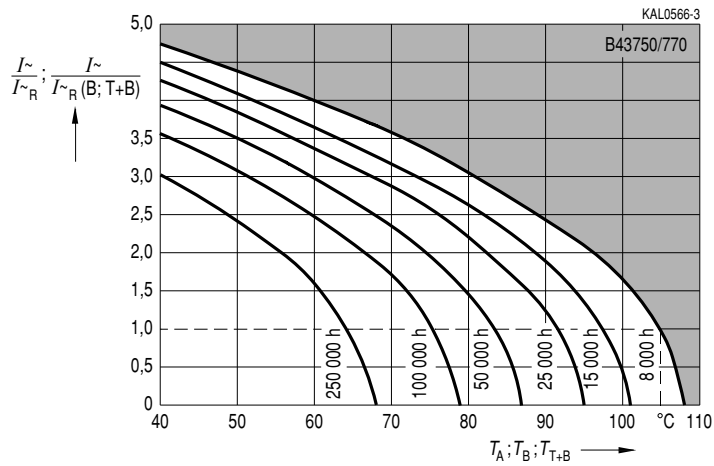

Depending on the application, interpret the graph as follows:

1. Natural cooling  
Use rated current  $I_{\sim R}$  and ambient temperature  $T_A$ .
2. Cooling of base  
Use rated current  $I_{\sim R} (B)$  and temperature of capacitor base  $T_B$ .
3. Cooling of terminals and base  
Use rated current  $I_{\sim R} (T+B)$  and temperature of capacitor base  $T_{T+B}$ .  
Ensure that the temperature of the cooled terminals is lower than that of the case base.

Due to the current load capability of the contact elements, the following current limits must not be exceeded, even if the frequency and temperature factors have been taken into account:


Capacitor diameter	Capacitor base cooling	Terminal and capacitor base cooling
64,3 mm	62 A	75 A
76,9 mm	80 A	100 A
91,0 mm	80 A	100 A

1) Refer to page 40 for an explanation on how to interpret the useful life graphs.




B43750 / B43770


Max. Ripple Current – 105 °C



**Frequency factor of permissible ripple current  $I_{\sim}$  versus frequency  $f$**

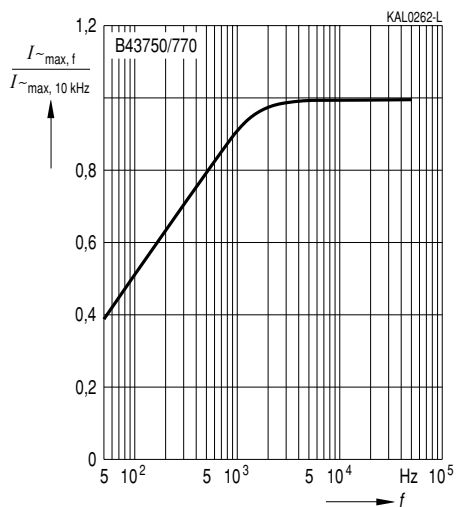

**Frequency characteristics of ESR**  
Typical behavior

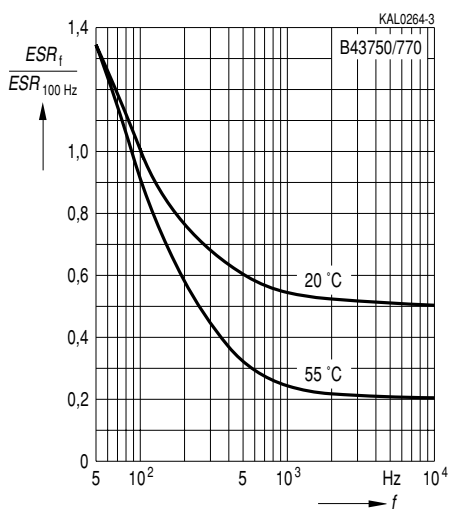



**Herausgegeben von EPCOS AG**

**Unternehmenskommunikation, Postfach 80 17 09, 81617 München, DEUTSCHLAND**

**☎ ++49 89 636 09, FAX (0 89) 636-2 26 89**

© EPCOS AG 2002. Vervielfältigung, Veröffentlichung, Verbreitung und Verwertung dieser Broschüre und ihres Inhalts ohne ausdrückliche Genehmigung der EPCOS AG nicht gestattet.

Bestellungen unterliegen den vom ZVEI empfohlenen Allgemeinen Lieferbedingungen für Erzeugnisse und Leistungen der Elektroindustrie, soweit nichts anderes vereinbart wird.

Diese Broschüre ersetzt die vorige Ausgabe.

Fragen über Technik, Preise und Liefermöglichkeiten richten Sie bitte an den Ihnen nächstgelegenen Vertrieb der EPCOS AG oder an unsere Vertriebsgesellschaften im Ausland. Bauelemente können aufgrund technischer Erfordernisse Gefahrstoffe enthalten. Auskünfte darüber bitten wir unter Angabe des betreffenden Typs ebenfalls über die zuständige Vertriebsgesellschaft einzuholen.

**Published by EPCOS AG**

**Corporate Communications, P.O. Box 80 17 09, 81617 Munich, GERMANY**

**☎ ++49 89 636 09, FAX (0 89) 636-2 26 89**

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.