

IBM11M4735C
IBM11M4735CB
4M x 72 DRAM MODULE

Features

- 168 Pin JEDEC Standard, 8 Byte Dual In-line Memory Module
- 4Mx72 Extended Data Out Page Mode DIMM
- Performance:

		-50	-60	-70
t _{RAC}	$\overline{\text{RAS}}$ Access Time	50ns	60ns	70ns
t _{CAC}	$\overline{\text{CAS}}$ Access Time	18ns	20ns	25ns
t _{AA}	Access Time From Address	30ns	35ns	40ns
t _{RC}	Cycle Time	89ns	104ns	124ns
t _{HPC}	EDO Mode Cycle Time	20ns	25ns	30ns

- All inputs and outputs are LVTTTL (3.3V) or TTL (5.0V) compatible
- Single 3.3V $\pm$ 0.3V or 5.0V $\pm$ 0.5V Power Supply
- Au contacts

- Optimized for ECC applications
- System Performance Benefits:
 - Buffered inputs (except $\overline{\text{RAS}}$, Data)
 - Reduced noise (32 V_{SS}/V_{CC} pins)
 - 4 Byte Interleave enabled
 - Buffered PDs
- Extended Data Out (EDO) Mode, Read-Modify-Write Cycles
- Refresh Modes: $\overline{\text{RAS}}$ -Only, CBR and Hidden Refresh
- 4096 refresh cycles distributed across 64ms
- 12/10 addressing (Row/Column)
- Card size: 5.25" x 1.0" x 0.354"
- DRAMS in SOJ Package

Description


IBM11M4735C is an industry standard 168-pin 8-byte Dual In-line Memory Module (DIMM) which is organized as a 4Mx72 high speed memory array designed with EDO DRAMs for ECC applications. The DIMM uses 18 4Mx4 EDO DRAMs in SOJ packages. The use of EDO DRAMs allows for a reduction in Page Mode Cycle time from 40ns (Fast Page) to 25ns for 60ns DRAM modules.

Improved system performance is provided by the on-DIMM buffering of selected input signals. The specified timings include all buffer, net and skew delays, which simplifies the memory subsystem design analysis. The data and $\overline{\text{RAS}}$ signals are not buffered, which preserves the DRAM access specifications of 50ns, 60ns and 70ns.

Presence Detect (PD) and Identification Detect (ID) bits provide information about the DIMM density, addressing, performance and features. PD bits can be dotted at the system level and activated for each DIMM position using the PD enable ($\overline{\text{PDE}}$) signal. ID bits also allow detection of card features, and may be dot-or'd at the system level to provide information for the entire DIMM bank. For example, the system will determine that ECC DIMMs are installed if PD8 is low (0). ID0 need not be sensed since both x72 and x80 ECC DIMMs will function in a x72 bank.

All IBM 168-pin DIMMs provide a high performance, flexible 8-byte interface in a 5.25" long space-saving footprint. Related products are the x64 ECC DIMMs (5V and 3.3V).

Card Outline 3.3V

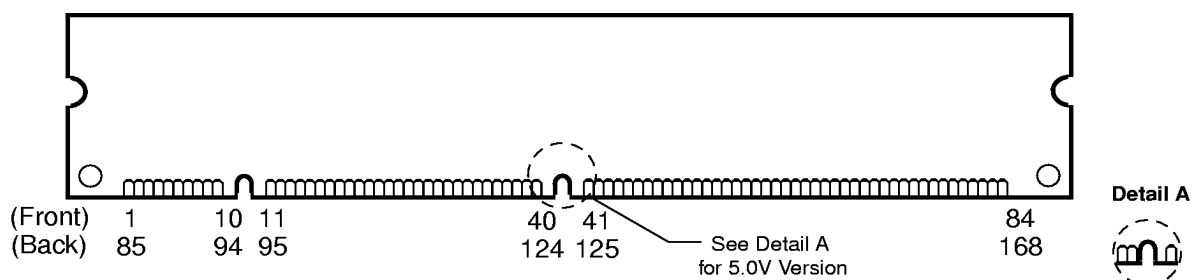

50H4201
SA14-4616-04
Revised 12/96

©IBM Corporation. All rights reserved.
Use is further subject to the provisions at the end of this document.

IBM11M4735C
IBM11M4735CB
4M x 72 DRAM MODULE

Pin Description

$\overline{RAS}0, \overline{RAS}2$	Row Address Strobe
$\overline{CAS}0, \overline{CAS}4$	Column Address Strobe (Buffered)
$\overline{WE}0, \overline{WE}2$	Read/write Input (Buffered)
$\overline{OE}0, \overline{OE}2$	Output Enable (Buffered)
A0, B0, A1 - A11	Address Inputs (Buffered)
DQx	Data Input/Output
V _{CC}	Power (3.3V or 5.0V)
V _{SS}	Ground
NC	No Connect
PD1 - PD8	Presence Detects (Buffered)
$\overline{PDE}$	Presence Detect Enable
ID0 - ID1	ID Bits

Pinout


Pin#	Front Side	Pin#	Back Side	Pin#	Front Side	Pin#	Back Side
1	V _{SS}	85	V _{SS}	43	V _{SS}	127	V _{SS}
2	DQ0	86	DQ36	44	$\overline{OE}2$	128	NC
3	DQ1	87	DQ37	45	$\overline{RAS}2$	129	NC
4	DQ2	88	DQ38	46	$\overline{CAS}4$	130	NC
5	DQ3	89	DQ39	47	NC	131	NC
6	V _{CC}	90	V _{CC}	48	$\overline{WE}2$	132	$\overline{PDE}$
7	DQ4	91	DQ40	49	V _{CC}	133	V _{CC}
8	DQ5	92	DQ41	50	NC	134	NC
9	DQ6	93	DQ42	51	NC	135	NC
10	DQ7	94	DQ43	52	DQ18	136	DQ54
11	DQ8	95	DQ44	53	DQ19	137	DQ55
12	V _{SS}	96	V _{SS}	54	V _{SS}	138	V _{SS}
13	DQ9	97	DQ45	55	DQ20	139	DQ56
14	DQ10	98	DQ46	56	DQ21	140	DQ57
15	DQ11	99	DQ47	57	DQ22	141	DQ58
16	DQ12	100	DQ48	58	DQ23	142	DQ59
17	DQ13	101	DQ49	59	V _{CC}	143	V _{CC}
18	V _{CC}	102	V _{CC}	60	DQ24	144	DQ60
19	DQ14	103	DQ50	61	NC	145	NC
20	DQ15	104	DQ51	62	NC	146	NC
21	DQ16	105	DQ52	63	NC	147	NC
22	DQ17	106	DQ53	64	NC	148	NC
23	V _{SS}	107	V _{SS}	65	DQ25	149	DQ61
24	NC	108	NC	66	DQ26	150	DQ62
25	NC	109	NC	67	DQ27	151	DQ63
26	V _{CC}	110	V _{CC}	68	V _{SS}	152	V _{SS}
27	$\overline{WE}0$	111	NC	69	DQ28	153	DQ64
28	$\overline{CAS}0$	112	NC	70	DQ29	154	DQ65
29	NC	113	NC	71	DQ30	155	DQ66
30	$\overline{RAS}0$	114	NC	72	DQ31	156	DQ67
31	$\overline{OE}0$	115	NC	73	V _{CC}	157	V _{CC}
32	V _{SS}	116	V _{SS}	74	DQ32	158	DQ68
33	A0	117	A1	75	DQ33	159	DQ69
34	A2	118	A3	76	DQ34	160	DQ70
35	A4	119	A5	77	DQ35	161	DQ71
36	A6	120	A7	78	V _{SS}	162	V _{SS}
37	A8	121	A9	79	PD1	163	PD2
38	A10	122	A11	80	PD3	164	PD4
39	NC	123	NC	81	PD5	165	PD6
40	V _{CC}	124	V _{CC}	82	PD7	166	PD8
41	NC	125	NC	83	ID0	167	ID1
42	NC	126	B0	84	V _{CC}	168	V _{CC}

Note: All pin assignments are consistent for all 8 Byte versions.

Ordering Information

Part Number	Organization	Speed	Addr.	Leads	Dimension	Power	Notes
IBM11M4735C-60J	4Mx72	60ns	12/10	Au	5.25"x1.0"x 0.354"	5.0V	
IBM11M4735C-70J		70ns					
IBM11M4735CB-50J		50ns				3.3V	
IBM11M4735CB-60J		60ns					

Block Diagram

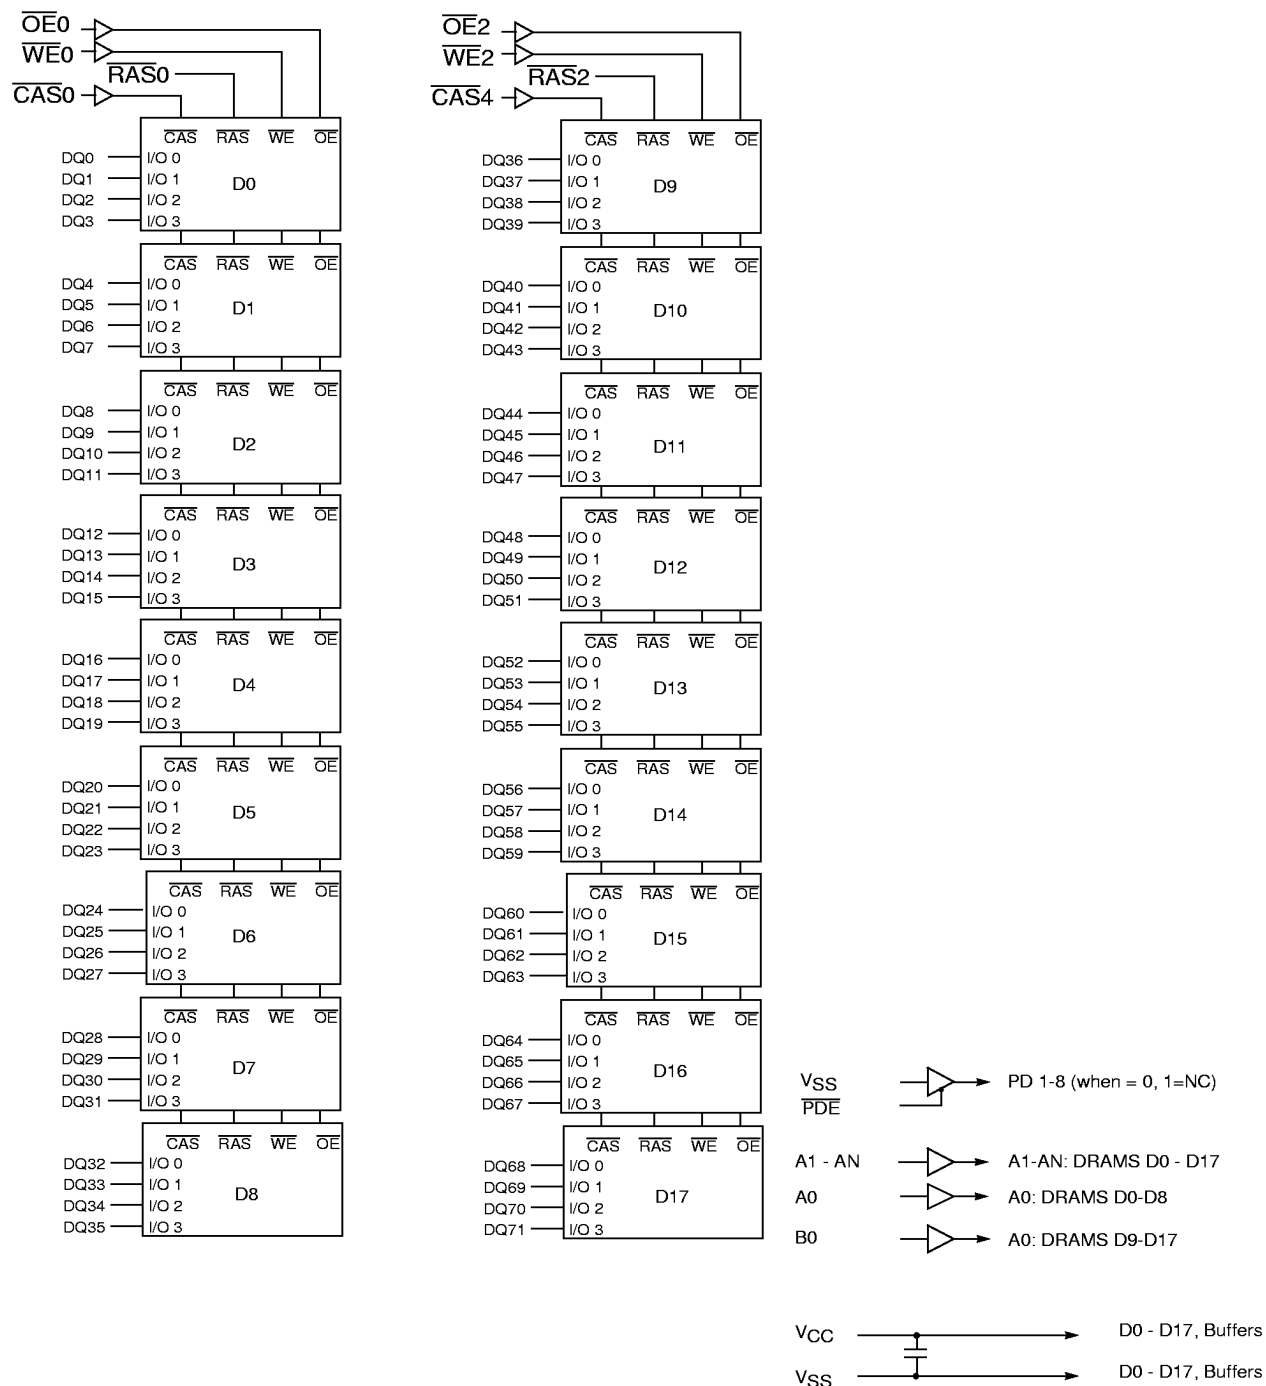

Truth Table

Function		$\overline{\text{RAS}}$	$\overline{\text{CAS}}$	$\overline{\text{WE}}$	$\overline{\text{OE}}$	Row Address	Column Address	$\overline{\text{PDE}}$	DQx
Standby		H	H→X	X	X	X	X	X	High Impedance
Read		L	L	H	L	Row	Col	X	Valid Data Out
Early-Write		L	L	L	X	Row	Col	X	Valid Data In
Late-Write		L	L	H→L	H	Row	Col	X	Valid Data In
RMW		L	L	H→L	L→H	Row	Col	X	Valid Data Out, Valid Data In
EDO Page Mode - Read 1st Cycle		L	H→L	H	L	Row	Col	X	Valid Data Out
Subsequent Cycles		L	H→L	H	L	N/A	Col	X	Valid Data Out
EDO Page Mode - Write 1st Cycle		L	H→L	L	X	Row	Col	X	Valid Data In
Subsequent Cycles		L	H→L	L	X	N/A	Col	X	Valid Data In
EDO Page Mode - RMW 1st Cycle		L	H→L	H→L	L→H	Row	Col	X	Valid Data Out, Valid Data In
Subsequent Cycles		L	H→L	H→L	L→H	N/A	Col	X	Valid Data Out, Valid Data In
$\overline{\text{RAS}}$ -Only Refresh		L	H	X	X	Row	N/A	X	High Impedance
$\overline{\text{CAS}}$ -Before- $\overline{\text{RAS}}$ Refresh		H→L	L	H	X	X	X	X	High Impedance
Hidden Refresh	Read	L→H→L	L	H	L	Row	Col	X	Data Out
	Write	L→H→L	L	H	X	Row	Col	X	Data In
Read Presence Detects		X	X	X	X	X	X	L	Not Affected (PD Bits Valid)

Presence Detect

Pin	-50	-60	-70
PD1 (PD1 - PD4: Addressing/Density)	1	1	1
PD2	1	1	1
PD3	0	0	0
PD4	1	1	1
PD5 (EDO Detection)	1	1	1
PD6 (PD6 - PD7: Speed)	0	1	0
PD7	0	1	1
PD8 (Parity/ECC Designator)	0	0	0
ID0 (DIMM Type/Width)	0	0	0
ID1 (Refresh Mode)	0	0	0
1. PD1-8 are buffered outputs (0 = driven to V_{OL} , 1 = open) 2. ID0-1 are unbuffered outputs (0 = V_{SS} , 1 = open) 3. $\overline{PDE}$ should be tied high or low at system level if not used			

Absolute Maximum Ratings

Symbol	Parameter	Rating (3.3V)	Rating (5.0V)	Units	Notes
V _{CC}	Power Supply Voltage	-0.5 to +4.6	-1.0 to +7.0	V	1
V _{IN}	Input Voltage	-0.5 to min (V _{CC} + 0.5, 4.6)	-0.5 to min (V _{CC} + 0.5, 7.0)	V	1
V _{OUT}	Output Voltage	-0.5 to min (V _{CC} + 0.5, 4.6)	-0.5 to min (V _{CC} + 0.5, 7.0)	V	1
T _{OPR}	Operating Temperature	0 to +70	0 to +70	°C	1
T _{STG}	Storage Temperature	-55 to +125	-55 to +125	°C	1
P _D	Power Dissipation	5.1	7.4	W	1, 2
I _{OUT}	Short Circuit Output Current	50	50	mA	1
I _{OUTPD}	Short Circuit Output Current (PD)	60	60	mA	1

1. Stresses greater than those listed may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions above those indicated is not implied. Exposure to absolute maximum rating condition for extended periods may affect reliability.
2. P_D is calculated for 3.3V using 50ns DRAMs & 5.0V using 60ns.

Recommended DC Operating Conditions (T_A = 0 to 70°C)

Symbol	Parameter	3.3V			5.0V			Units	Notes
		Min	Typ	Max	Min	Typ	Max		
V _{CC}	Supply Voltage	3.0	3.3	3.6	4.5	5.0	5.5	V	1
V _{IH}	Input High Voltage	2.0	—	V _{CC} + 0.5	2.4	—	V _{CC} + 0.5	V	1, 2
V _{IL}	Input Low Voltage	-0.5	—	0.8	-0.5	—	0.8	V	1, 2

1. All voltages referenced to V_{SS}.
2. V_{IH} may overshoot to V_{CC} + 1.2V for pulse widths of ≤ 4.0ns with 3.3 Volt, or V_{CC} + 2.0V for pulse widths of ≤ 4.0ns (or V_{CC} + 1.0V for ≤ 8.0ns) with 5.0 Volt. Additionally, V_{IL} may undershoot to -2.0V for pulse widths ≤ 4.0ns (or -1.0V for ≤ 8.0ns). Pulse widths measured at 50% points with amplitude measured peak to DC reference.

Capacitance (T_A = 0 to +70°C, V_{CC} = 3.3V ± 0.3V or 5.0V ± 0.5V)

Symbol	Parameter	Max	Units
C _{I1}	Input Capacitance (A0, B0, A1-A11)	13	pF
C _{I2}	Input Capacitance (RAS)	70	pF
C _{I3}	Input Capacitance (CAS, WE, OE)	13	pF
C _{I4}	Input Capacitance (PDE)	18	pF
C _{IO1}	Input/Output Capacitance (DQx)	15	pF
C _{O1}	Output Capacitance (PD)	15	pF
C _{O2}	Output Capacitance (ID)	5	pF

DC Electrical Characteristics (T_A = 0 to +70°C, V_{CC} = 3.3V ± 0.3V or V_{CC} = 5.0V ± 0.5V)

Symbol	Parameter	Min.	Max.	Units	Notes
I _{CC1}	Operating Current Average Power Supply Operating Current (R _{AS} , C _{AS} , Address Cycling: t _{RC} = t _{RC} min.)	-50	—	1530	mA 1, 2, 3
		-60	—	1350	
		-70	—	1170	
I _{CC2}	Standby Current (TTL) Power Supply Standby Current (R _{AS} = C _{AS} = V _{IH})	—	36	mA	
I _{CC3}	R _{AS} Only Refresh Current Average Power Supply Current, R _{AS} Only Mode (R _{AS} Cycling, C _{AS} = V _{IH} : t _{RC} = t _{RC} min)	-50	—	1530	mA 1, 3
		-60	—	1350	
		-70	—	1170	
I _{CC4}	EDO Page Mode Current Average Power Supply Current, EDO Page Mode (R _{AS} = V _{IL} , C _{AS} , Address Cycling: t _{HPC} = t _{HPC} min)	-50	—	1530	mA 1, 2, 3
		-60	—	1170	
		-70	—	990	
I _{CC5}	Standby Current (CMOS) Power Supply Standby Current (R _{AS} = C _{AS} = V _{CC} - 0.2V)	—	18	mA	
I _{CC6}	C _{AS} Before R _{AS} Refresh Current Average Power Supply Current, C _{AS} Before R _{AS} Mode (R _{AS} , C _{AS} , Cycling: t _{RC} = t _{RC} min)	-50	—	1530	mA 1, 3
		-60	—	1350	
		-70	—	1170	
I _{I(L)}	Input Leakage Current Input Leakage Current, any input (0.0 ≤ V _{IN} ≤ (V _{CC} + 0.3V)), All Other Pins Not Under Test = 0V	All but R _{AS}	-10	+10	μA
		R _{AS}	-90	+90	
I _{O(L)}	Output Leakage Current (D _{OUT} is disabled, 0.0 ≤ V _{OUT} ≤ V _{CC})	-10	+10	μA	
V _{OH}	Output Level (TTL) Output "H" Level Voltage (I _{OUT} = -2.5mA for 3.3V, or I _{OUT} = -5mA for 5.0V)	2.4	V _{CC}	V	
V _{OL}	Output Level (TTL) Output "L" Level Voltage (I _{OUT} = +2.1mA for 3.3V, or I _{OUT} = +4.2mA for 5.0V)	0.0	0.4	V	
1. I _{CC1} , I _{CC3} , I _{CC4} and I _{CC6} depend on cycle rate. 2. I _{CC1} and I _{CC4} depend on output loading. Specified values are obtained with the output open. 3. Address can be changed once or less while R _{AS} = V _{IL} . In the case of I _{CC4} , it can be changed once or less when C _{AS} = V _{IH} .					

AC Characteristics ($T_A = 0$ to $+70^\circ\text{C}$, $V_{CC} = 3.3\text{V} \pm 0.3\text{V}$ or $5.0\text{V} \pm 0.5\text{V}$)

1. V_{IH} (min) and V_{IL} (max) are reference levels for measuring timing of input signals. Transition times are measured between V_{IH} and V_{IL} .
2. An initial pause of 200 μs is required after power-up followed by 8 $\overline{\text{RAS}}$ only refresh cycles before proper device operation is achieved. In case of using internal refresh counter, a minimum of 8 $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh cycles instead of 8 $\overline{\text{RAS}}$ only refresh cycles is required..
3. The specified timings include buffer, loading and skew delay adders: 2ns minimum, 5ns maximum delay, no pulse shrinkage to the DRAM device timings. The data and $\overline{\text{RAS}}$ signals are not buffered, which preserves the DRAMs access specifications of 60ns and 70ns.
4. AC measurements assume $t_T = 2\text{ns}$.

Read, Write, Read-Modify-Write and Refresh Cycles (Common Parameters)

Symbol	Parameter	-50		-60		-70		Unit	Notes
		Min	Max	Min	Max	Min	Max		
t_{RC}	Random Read or Write Cycle Time	89	—	104	—	124	—	ns	
t_{RP}	$\overline{\text{RAS}}$ Precharge Time	35	—	40	—	50	—	ns	
t_{CP}	$\overline{\text{CAS}}$ Precharge Time	8	—	10	—	10	—	ns	
t_{RAS}	$\overline{\text{RAS}}$ Pulse Width	50	10K	60	10K	70	10K	ns	
t_{CAS}	$\overline{\text{CAS}}$ Pulse Width	8	10K	10	10K	12	10K	ns	
t_{ASR}	Row Address Setup Time	5	—	5	—	5	—	ns	
t_{RAH}	Row Address Hold Time	8	—	8	—	8	—	ns	
t_{ASC}	Column Address Setup Time	2	—	2	—	2	—	ns	
t_{CAH}	Column Address Hold Time	10	—	10	—	10	—	ns	
t_{RCD}	$\overline{\text{RAS}}$ to $\overline{\text{CAS}}$ Delay Time	12	32	12	40	12	45	ns	1
t_{RAD}	$\overline{\text{RAS}}$ to Column Address Delay Time	10	20	10	25	10	30	ns	2
t_{RSH}	$\overline{\text{RAS}}$ Hold Time	13	—	15	—	17	—	ns	
t_{CSH}	$\overline{\text{CAS}}$ Hold Time	43	—	48	—	53	—	ns	
t_{CRP}	$\overline{\text{CAS}}$ to $\overline{\text{RAS}}$ Precharge Time	10	—	10	—	10	—	ns	
t_{ODD}	$\overline{\text{OE}}$ to D_{IN} Delay Time	18	—	20	—	25	—	ns	3
t_{DZO}	$\overline{\text{OE}}$ Delay Time from D_{IN}	-2	—	-2	—	-2	—	ns	4
t_{DZC}	$\overline{\text{CAS}}$ Delay Time from D_{IN}	-2	—	-2	—	-2	—	ns	4
t_T	Transition Time (Rise and Fall)	2	30	2	30	2	30	ns	

1. Operation within the $t_{RCD}(\text{max})$ limit ensures that $t_{RAC}(\text{max})$ can be met. The $t_{RCD}(\text{max})$ is specified as a reference point only: If t_{RCD} is greater than the specified $t_{RCD}(\text{max})$ limit, then access time is controlled by t_{CAC} .

2. Operation within the $t_{RAD}(\text{max})$ limit ensures that $t_{RAC}(\text{max})$ can be met. The $t_{RAD}(\text{max})$ is specified as a reference point only: If t_{RAD} is greater than the specified $t_{RAD}(\text{max})$ limit, then access time is controlled by t_{AA} .

3. Either t_{ODD} or t_{DZO} must be satisfied.

4. Either t_{DZC} or t_{DZO} must be satisfied.

Write Cycle

Symbol	Parameter	-50		-60		-70		Unit	Notes
		Min	Max	Min	Max	Min	Max		
t_{WCS}	Write Command Set Up Time	2	—	2	—	2	—	ns	1
t_{WCH}	Write Command Hold Time	9	—	12	—	14	—	ns	
t_{WP}	Write Command Pulse Width	7	—	10	—	12	—	ns	
t_{RWL}	Write Command to $\overline{RAS}$ Lead Time	12	—	15	—	17	—	ns	
t_{CWL}	Write Command to $\overline{CAS}$ Lead Time	9	—	12	—	14	—	ns	
t_{DS}	D_{IN} Setup Time	-2	—	-2	—	-2	—	ns	2
t_{DH}	D_{IN} Hold Time	12	—	15	—	17	—	ns	2

1. t_{WCS} , t_{RWD} , t_{CWD} , and t_{AWD} are not restrictive parameters. They are included in the data sheet as electrical characteristics only. If $t_{WCS} \geq t_{WCS}(\text{min.})$, the entire cycle is an early write cycle and the data pin will remain open circuit (high impedance) through the entire cycle; If $t_{RWD} \geq t_{RWD}(\text{min.})$, $t_{CWD} \geq t_{CWD}(\text{min.})$ and $t_{AWD} \geq t_{AWD}(\text{min.})$, the cycle is a Read-Modify-Write cycle and the data will contain read from the selected cell: If neither of the above sets of conditions are met, the condition of the data (at access time) is indeterminate.
2. Data-in set-up and hold is measured from the latter of the two timings, $\overline{CAS}$ or $\overline{WE}$.

Read Cycle

Symbol	Parameter	-50		-60		-70		Unit	Notes
		Min	Max	Min	Max	Min	Max		
t_{RAC}	Access Time from $\overline{RAS}$	—	50	—	60	—	70	ns	1, 2
t_{CAC}	Access Time from $\overline{CAS}$	—	18	—	20	—	25	ns	1, 2
t_{AA}	Access Time from Address	—	30	—	35	—	40	ns	1, 2
t_{OEA}	Access Time from $\overline{OE}$	—	18	—	20	—	25	ns	1, 2
t_{RCS}	Read Command Setup Time	2	—	2	—	2	—	ns	
t_{RCH}	Read Command Hold Time to $\overline{CAS}$	2	—	2	—	2	—	ns	3
t_{RRH}	Read Command Hold Time to $\overline{RAS}$	0	—	0	—	0	—	ns	3
t_{RAL}	Column Address to $\overline{RAS}$ Lead Time	30	—	35	—	40	—	ns	
t_{CLZ}	$\overline{CAS}$ to Output in Low-Z	2	—	2	—	2	—	ns	
t_{OES}	$\overline{OE}$ setup time prior to $\overline{CAS}$	7	—	10	—	10	—	ns	
t_{ORD}	$\overline{OE}$ setup time prior to $\overline{RAS}$ (Hidden Refresh)	2	—	5	—	5	—	ns	
t_{CDD}	$\overline{CAS}$ to D_{IN} Delay Time	18	—	20	—	20	—	ns	5
t_{OEZ}	Output Buffer Turn-off Delay from $\overline{OE}$	2	18	2	20	2	20	ns	4
t_{OFF}	Output Buffer Turn-off Delay	2	18	2	20	2	20	ns	4, 6
1. Measured with the specified current load and 100pF. 2. Access time is determined by the latter of t_{RAC}, t_{CAC}, t_{CPA}, t_{AA}, t_{OEA}. 3. Either t_{RCH} or t_{RRH} must be satisfied. 4. t_{OFF} (max) and t_{OEZ} (max) define the time at which the output achieves the open circuit condition and is not referenced to output voltage levels. 5. Either t_{CDD} or t_{ODD} must be satisfied. 6. t_{OFF} is referenced from the rising edge of $\overline{RAS}$ or $\overline{CAS}$, whichever is last.									

Read-Modify-Write Cycle

Symbol	Parameter	-50		-60		-70		Unit	Notes
		Min	Max	Min	Max	Min	Max		
t_{RWC}	Read-Modify-Write Cycle Time	123	—	143	—	170	—	ns	
t_{RWD}	$\overline{RAS}$ to $\overline{WE}$ Delay Time	70	—	82	—	97	—	ns	1
t_{CWD}	$\overline{CAS}$ to $\overline{WE}$ Delay Time	40	—	44	—	54	—	ns	1
t_{AWD}	Column Address to $\overline{WE}$ Delay Time	50	—	57	—	67	—	ns	1
t_{OEh}	$\overline{OE}$ Command Hold Time	7	—	10	—	12	—	ns	

1. t_{WCS} , t_{RWD} , t_{CWD} , and t_{AWD} are not restrictive parameters. They are included in the data sheet as electrical characteristics only. If $t_{WCS} \geq t_{WCS}(\text{min.})$, the entire cycle is an early write cycle and the data pin will remain open circuit (high impedance) through the entire cycle; If $t_{RWD} \geq t_{RWD}(\text{min.})$, $t_{CWD} \geq t_{CWD}(\text{min.})$ and $t_{AWD} \geq t_{AWD}(\text{min.})$, the cycle is a Read-Modify-Write cycle and the data will contain read from the selected cell: If neither of the above sets of conditions are met, the condition of the data (at access time) is indeterminate.

EDO Mode Cycle

Symbol	Parameter	-50		-60		-70		Units	Notes
		Min.	Max.	Min.	Max.	Min.	Max.		
t_{HCAS}	$\overline{CAS}$ Pulse Width (EDO Page Mode)	8	10K	10	10K	12	10K	ns	
t_{HPC}	EDO Page Mode Cycle Time (Read/Write)	20	—	25	—	30	—	ns	
t_{HPRWC}	EDO Page Mode Read Modify Write Cycle Time	63	—	72	—	84	—	ns	
t_{DOH}	Data-out Hold Time from $\overline{CAS}$	10	—	10	—	10	—	ns	
t_{WHZ}	Output buffer Turn-Off Delay from $\overline{WE}$	2	15	2	15	2	20	ns	
t_{WPZ}	$\overline{WE}$ Pulse Width to Output Disable at $\overline{CAS}$ High	7	—	10	—	10	—	ns	
t_{CPRH}	$\overline{RAS}$ Hold Time from $\overline{CAS}$ Precharge	35	—	40	—	45	—	ns	
t_{CPA}	Access Time from $\overline{CAS}$ Precharge	—	35	—	40	—	45	ns	1
t_{RASP}	EDO Page Mode $\overline{RAS}$ Pulse Width	50	125K	60	125K	70	125K	ns	
t_{OEP}	$\overline{OE}$ High Pulse Width	10	—	10	—	10	—	ns	
t_{OEHC}	$\overline{OE}$ High Hold Time from $\overline{CAS}$ High	10	—	10	—	10	—	ns	

1. Measured with the specified current load and 100pF at $V_{OL} = 0.8V$ and $V_{OH} = 2.0V$.


Refresh Cycle

Symbol	Parameter	-50		-60		-70		Unit	Notes
		Min	Max	Min	Max	Min	Max		
t_{CHR}	CAS Hold Time (CAS before $\overline{RAS}$ Refresh Cycle)	8	—	8	—	8	—	ns	
t_{CSR}	CAS Setup Time (CAS before $\overline{RAS}$ Refresh Cycle)	10	—	10	—	10	—	ns	
t_{WRP}	WE Setup Time (CAS before $\overline{RAS}$ Refresh Cycle)	15	—	15	—	15	—	ns	
t_{WRH}	WE Hold Time (CAS before $\overline{RAS}$ Refresh Cycle)	8	—	8	—	8	—	ns	
t_{RPC}	RAS Precharge to CAS Hold Time	3	—	3	—	3	—	ns	
t_{REF}	Refresh Period	—	64	—	64	—	64	ms	1
1. 4096 refreshes are required every 64ms.									


Presence Detect Read Cycle

Symbol	Parameter	-50		-60		-70		Unit	Notes
		Min	Max	Min	Max	Min	Max		
t_{PD}	PDE to Valid Presence Detect Data	—	10	—	10	—	10	ns	1
t_{PDOFF}	PDE Inactive to Presence Detects Inactive	0	10	0	10	0	10	ns	2
1. Measured with the specified current load and 100pF. 2. $t_{PDOFF(max)}$ defines the time at which the output achieves the open circuit condition and is not referenced to output voltage levels.									


Read Cycle

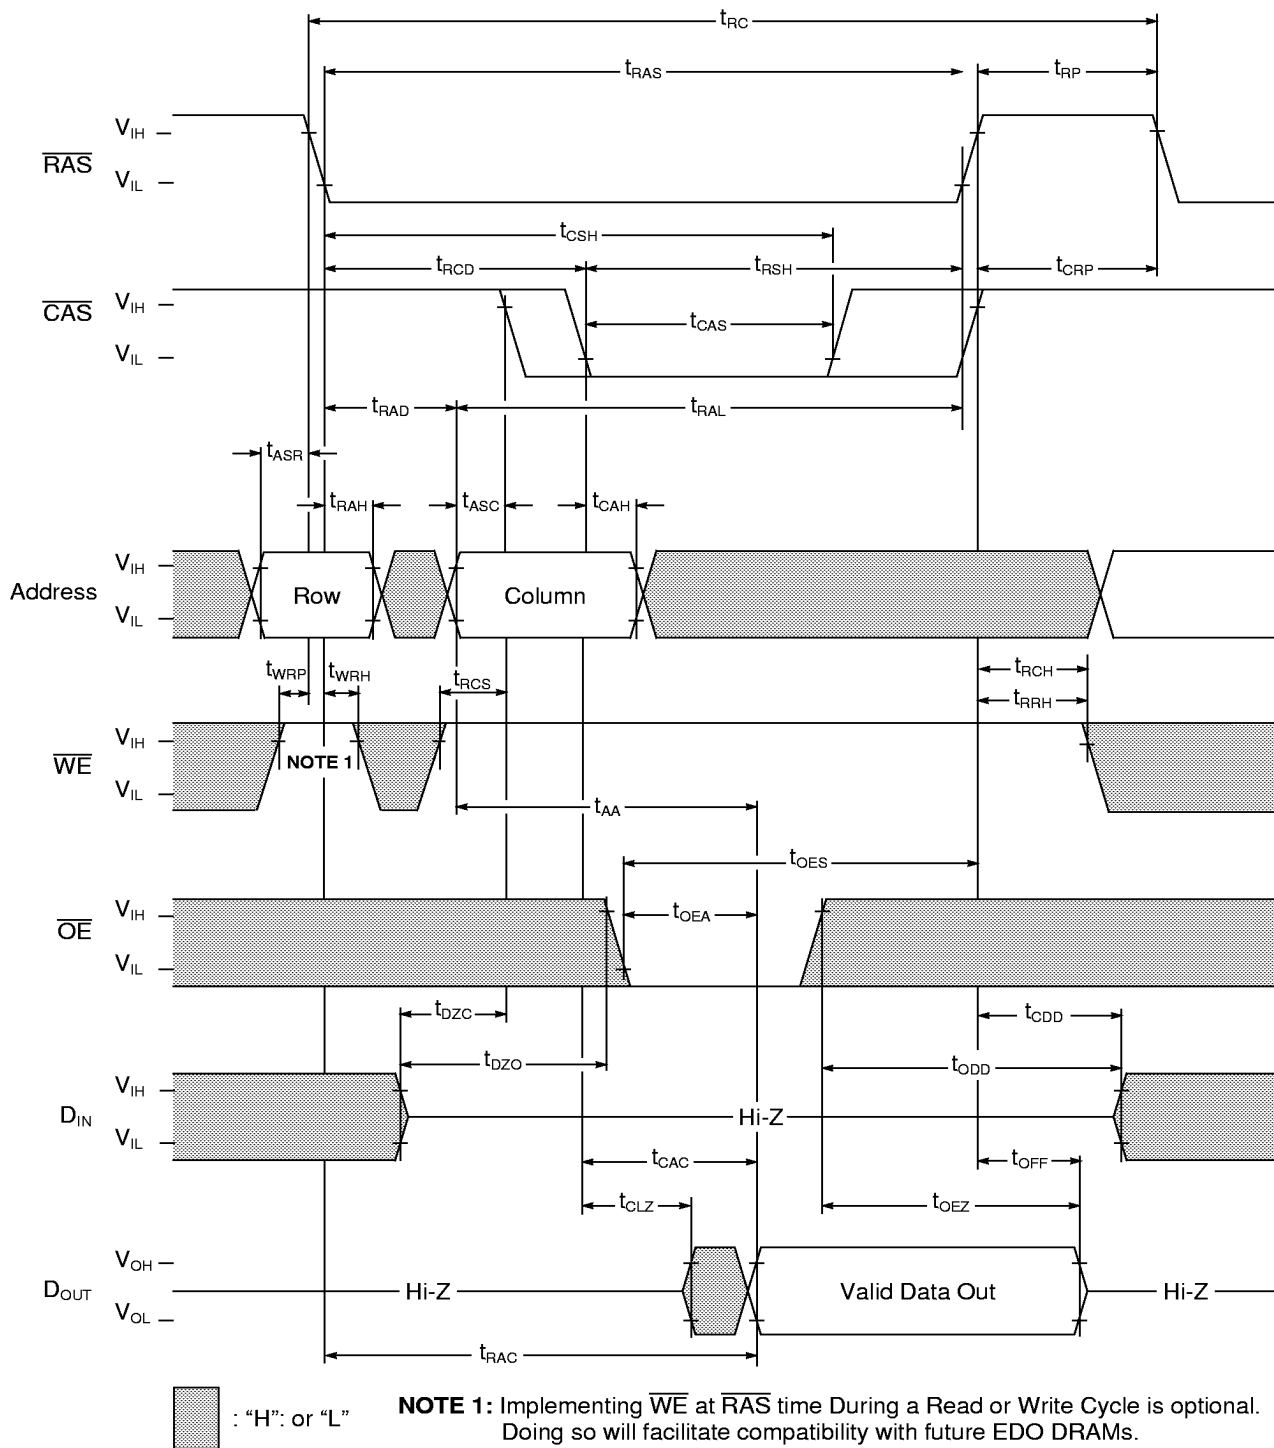


Write Cycle (Early Write)

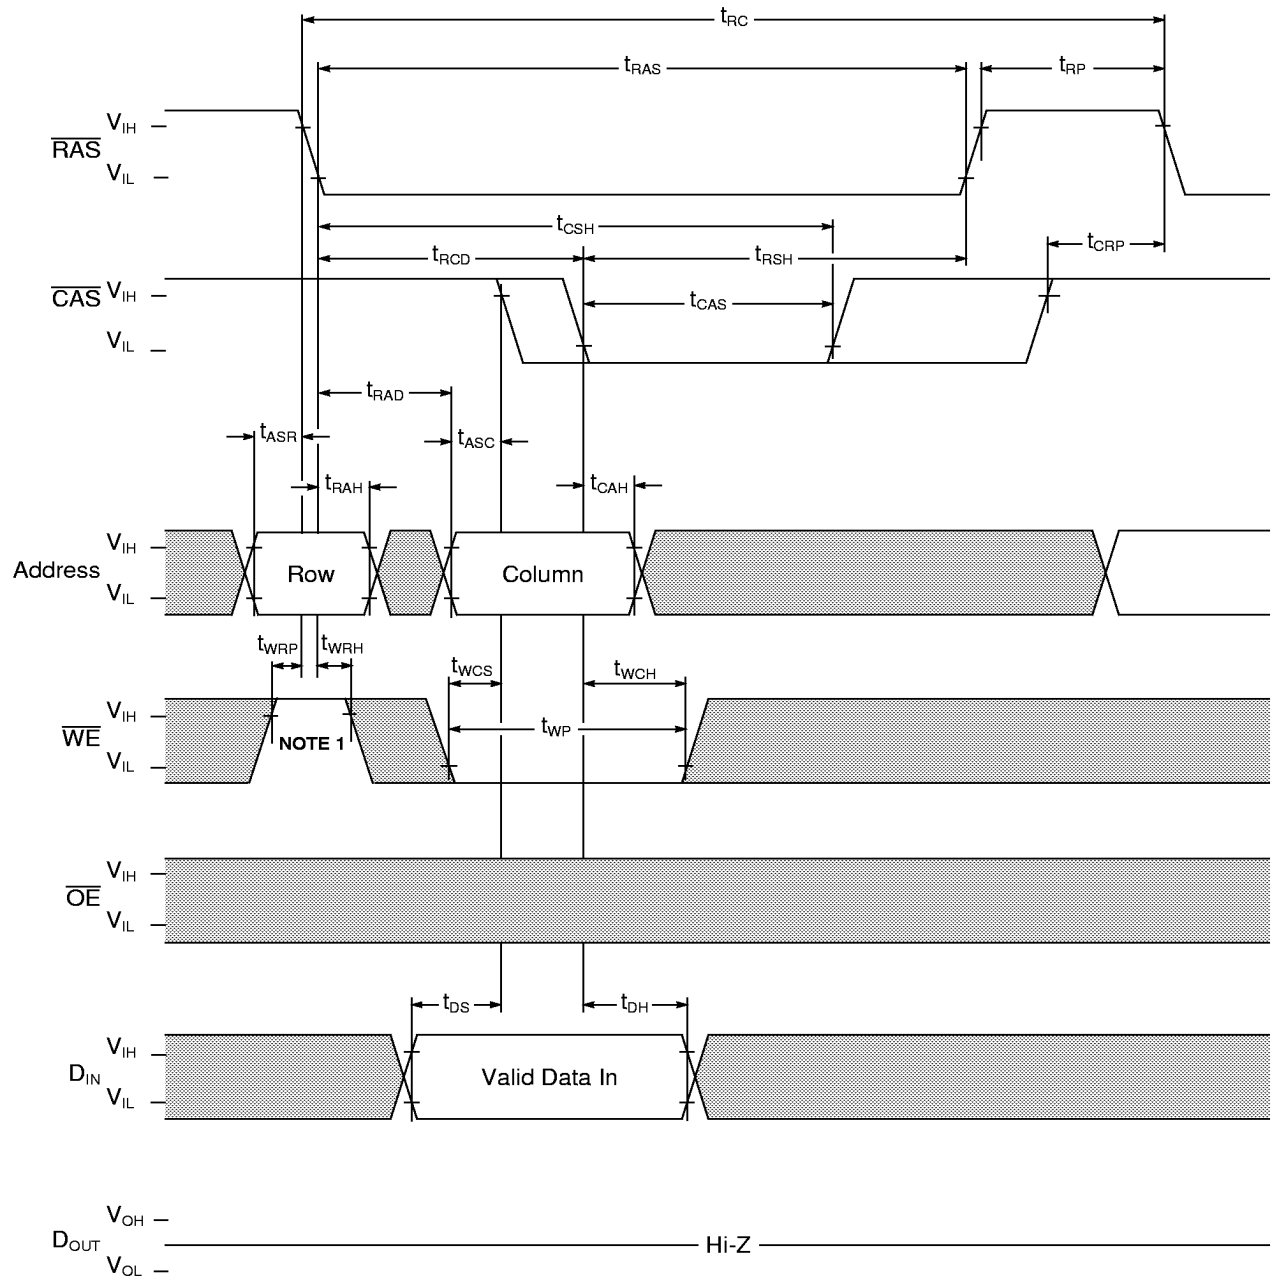


by ICminer.com Electronic-Library Service CopyRight 2003



Read-Modify-Write-Cycle

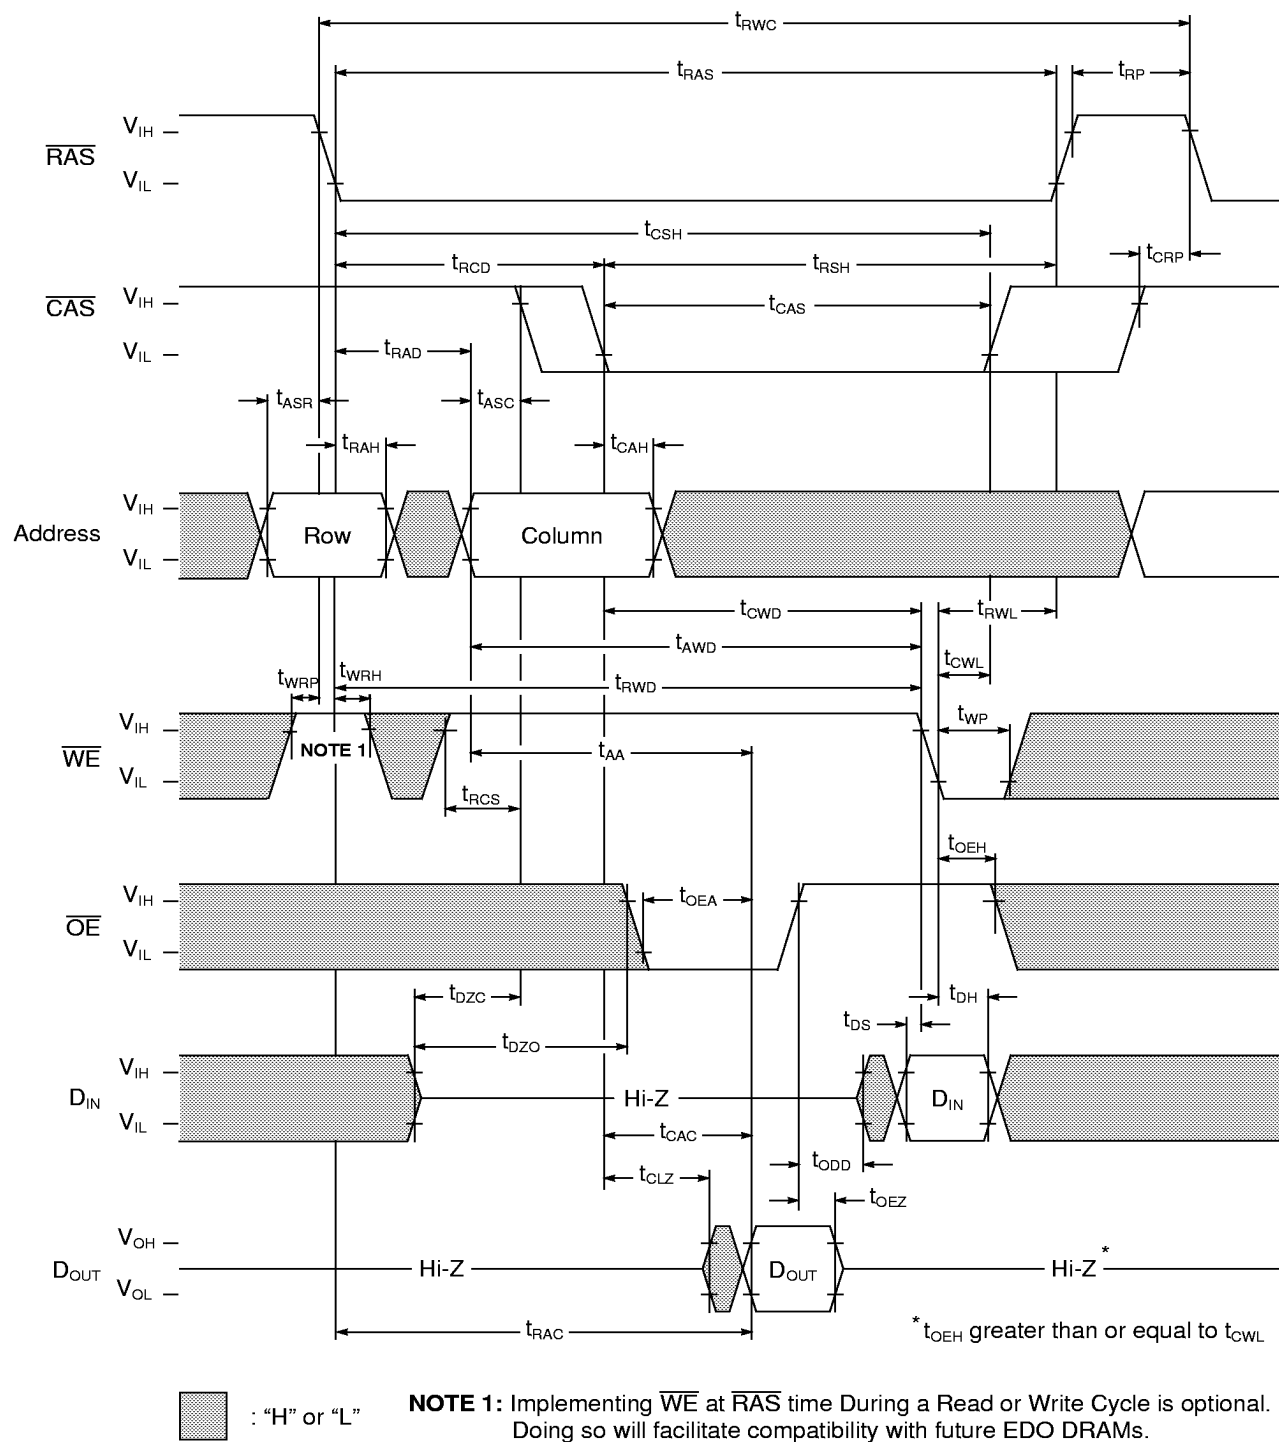


EDO Page Mode Read Cycle

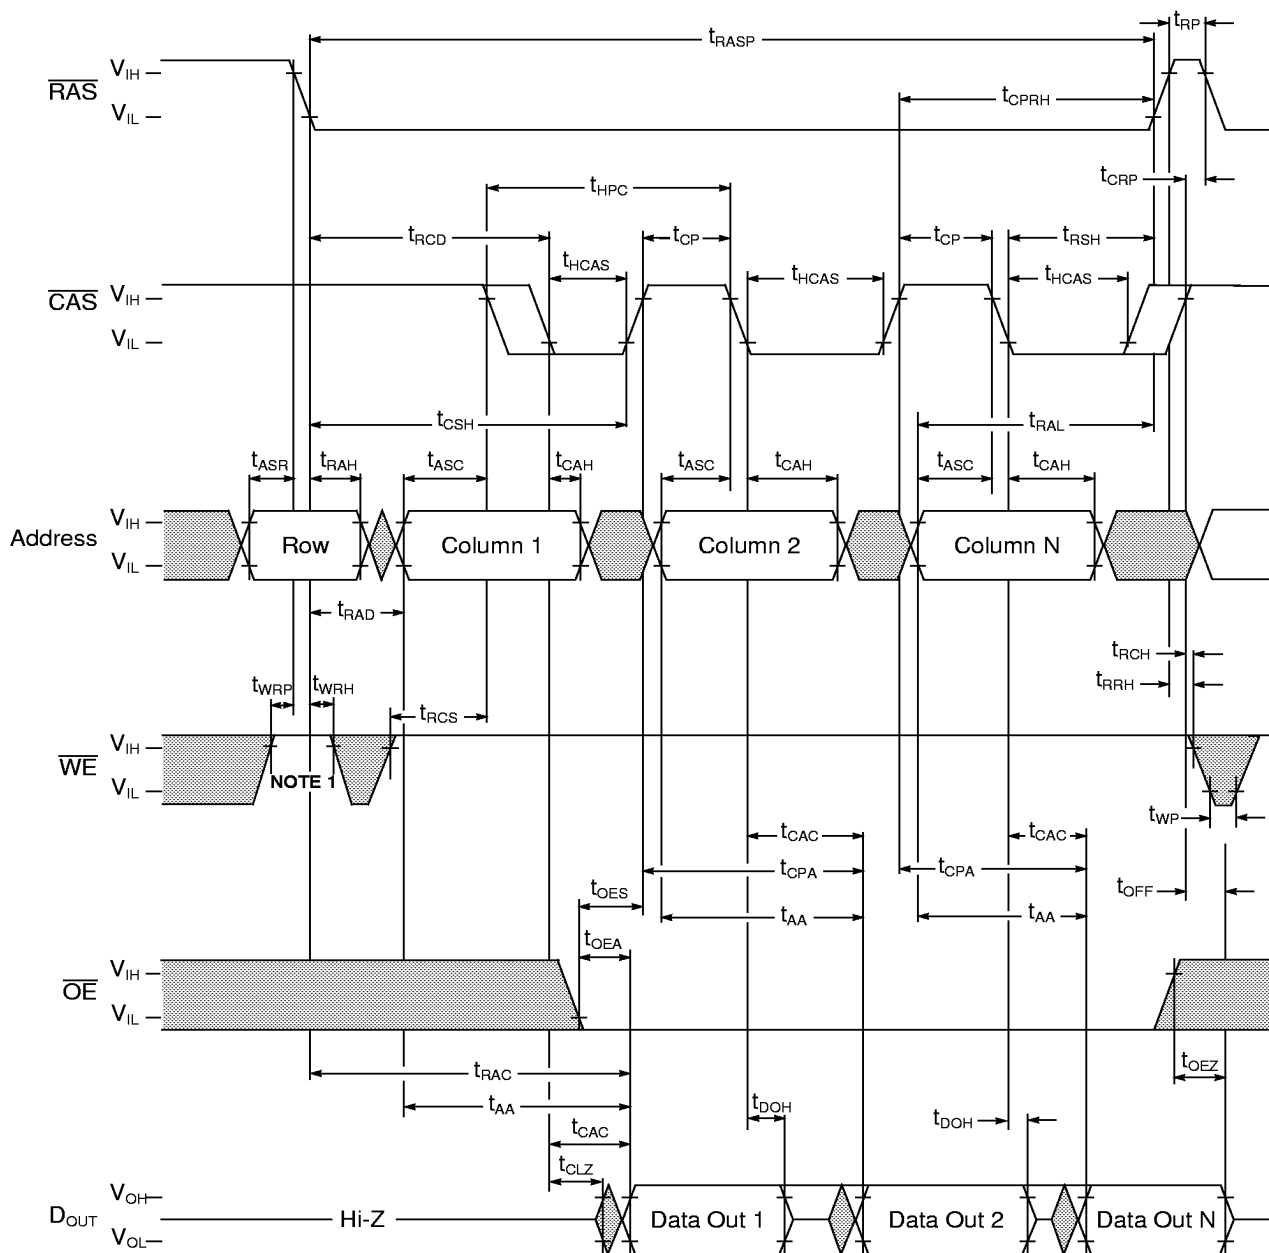


■ : "H" or "L"

NOTE 1: Implementing $\overline{WE}$ at $\overline{RAS}$ time During a Read or Write Cycle is optional. Doing so will facilitate compatibility with future EDO DRAMs.

50H4201
SA14-4616-04
Revised 12/96




EDO Page Mode Early Write Cycle

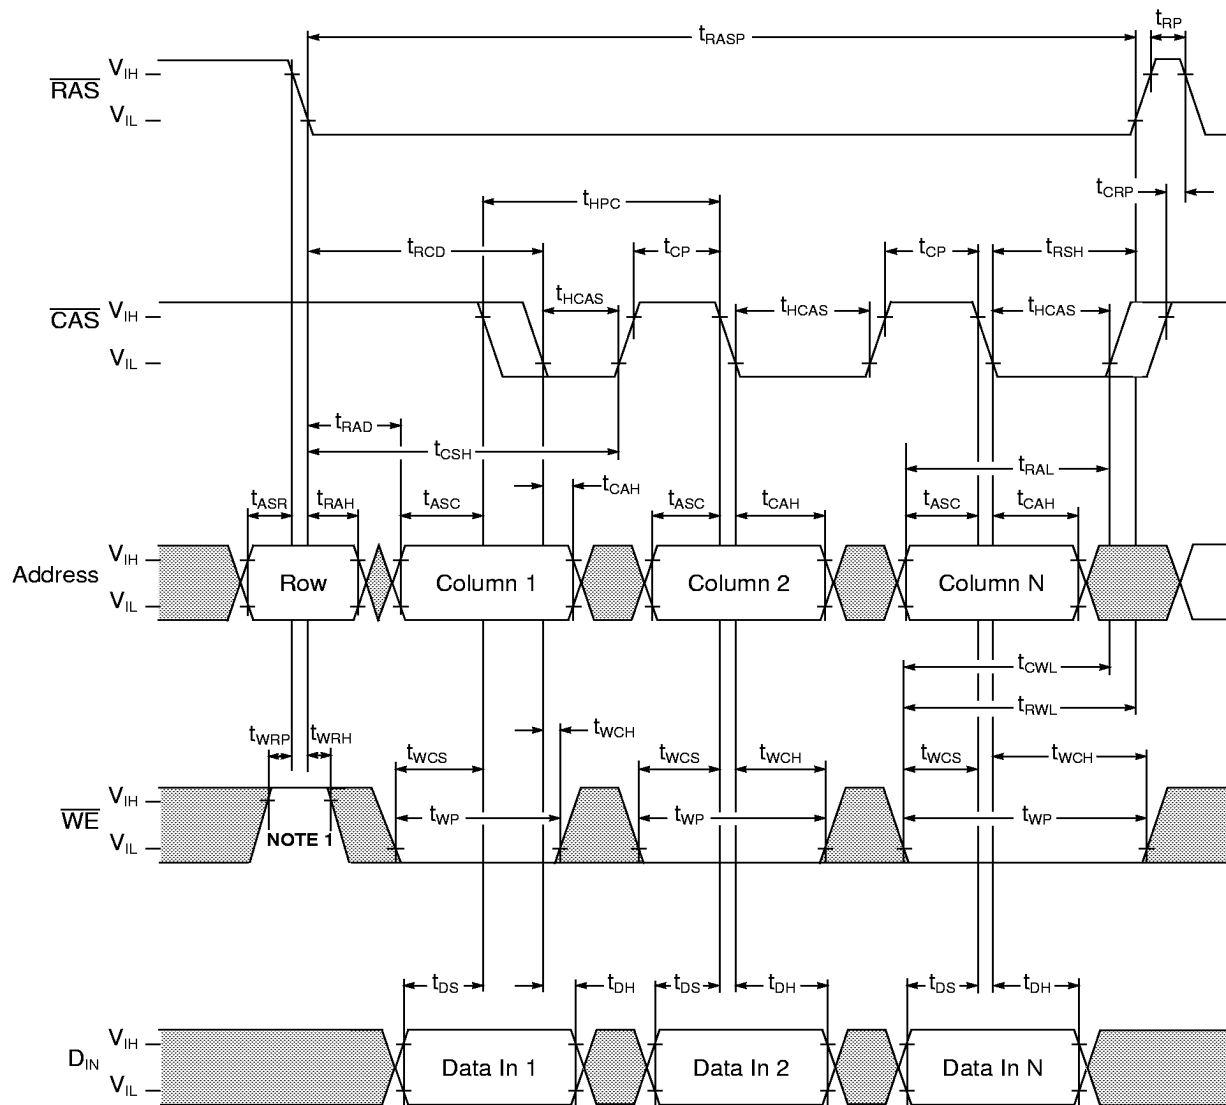


NOTE 1: Implementing $\overline{WE}$ at $\overline{RAS}$ time During a Read or Write Cycle is optional. Doing so will facilitate compatibility with future EDO DRAMs.

$\overline{OE}$ = Don't care

EDO Page Mode Late Write Cycle

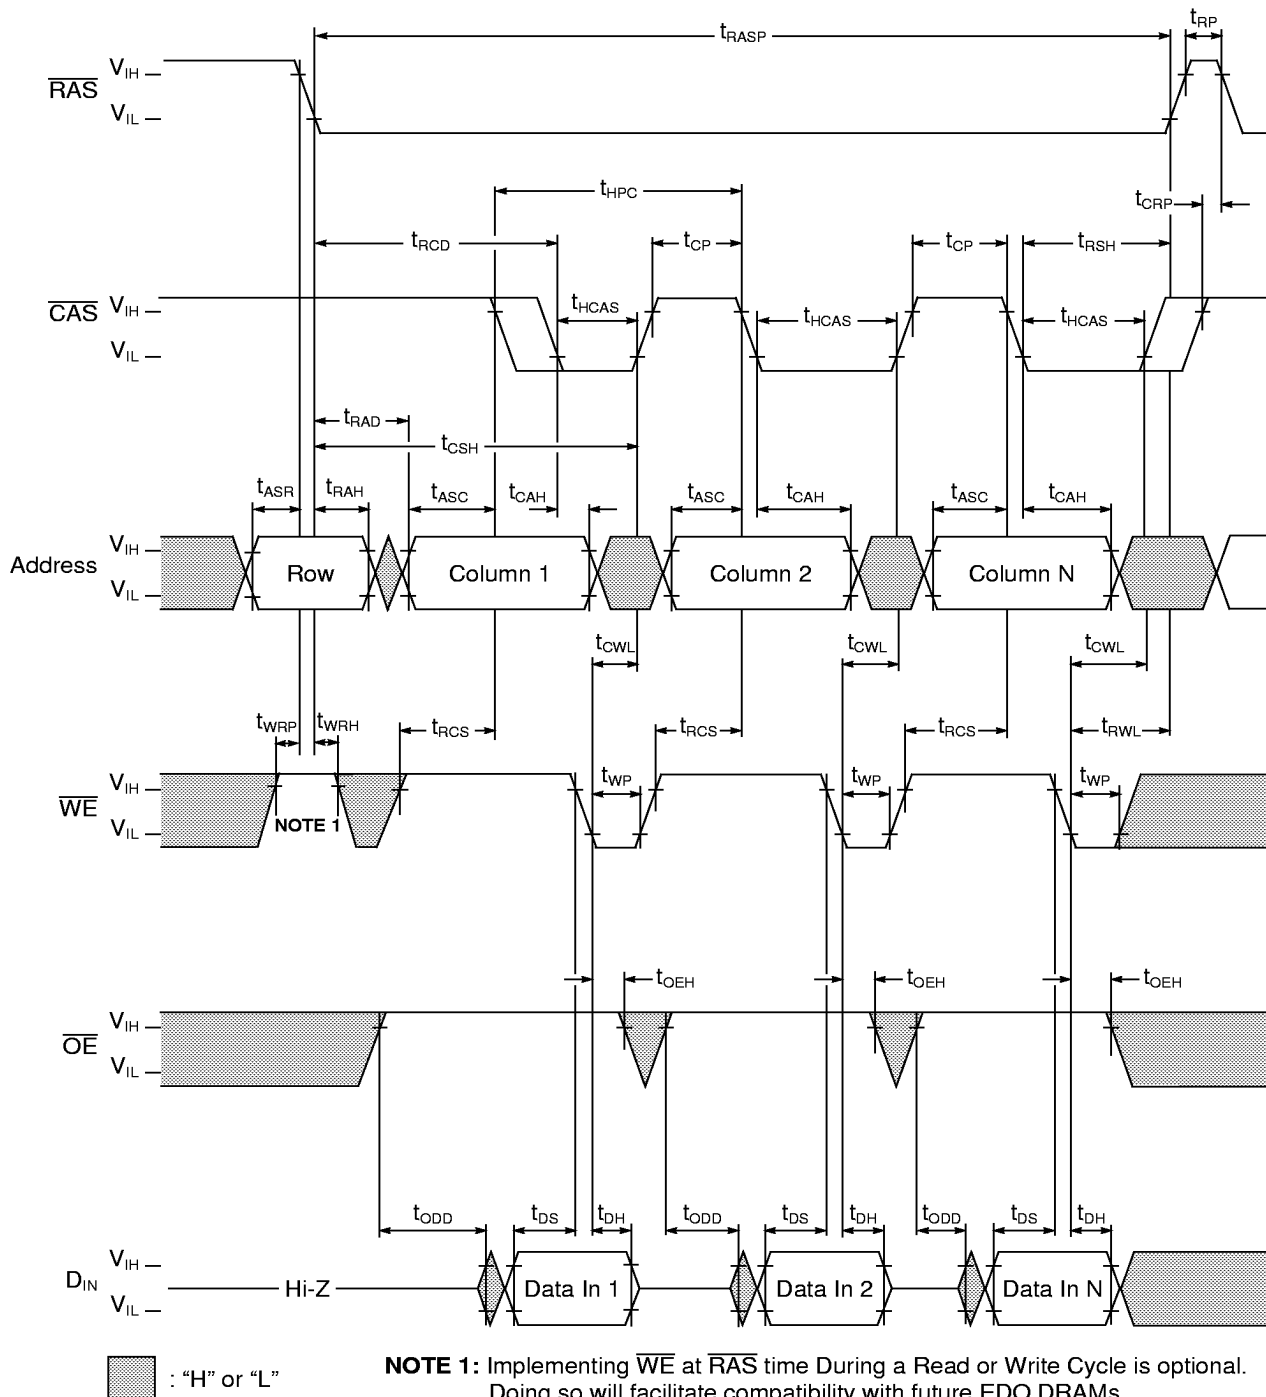


RAS Only Refresh Cycle

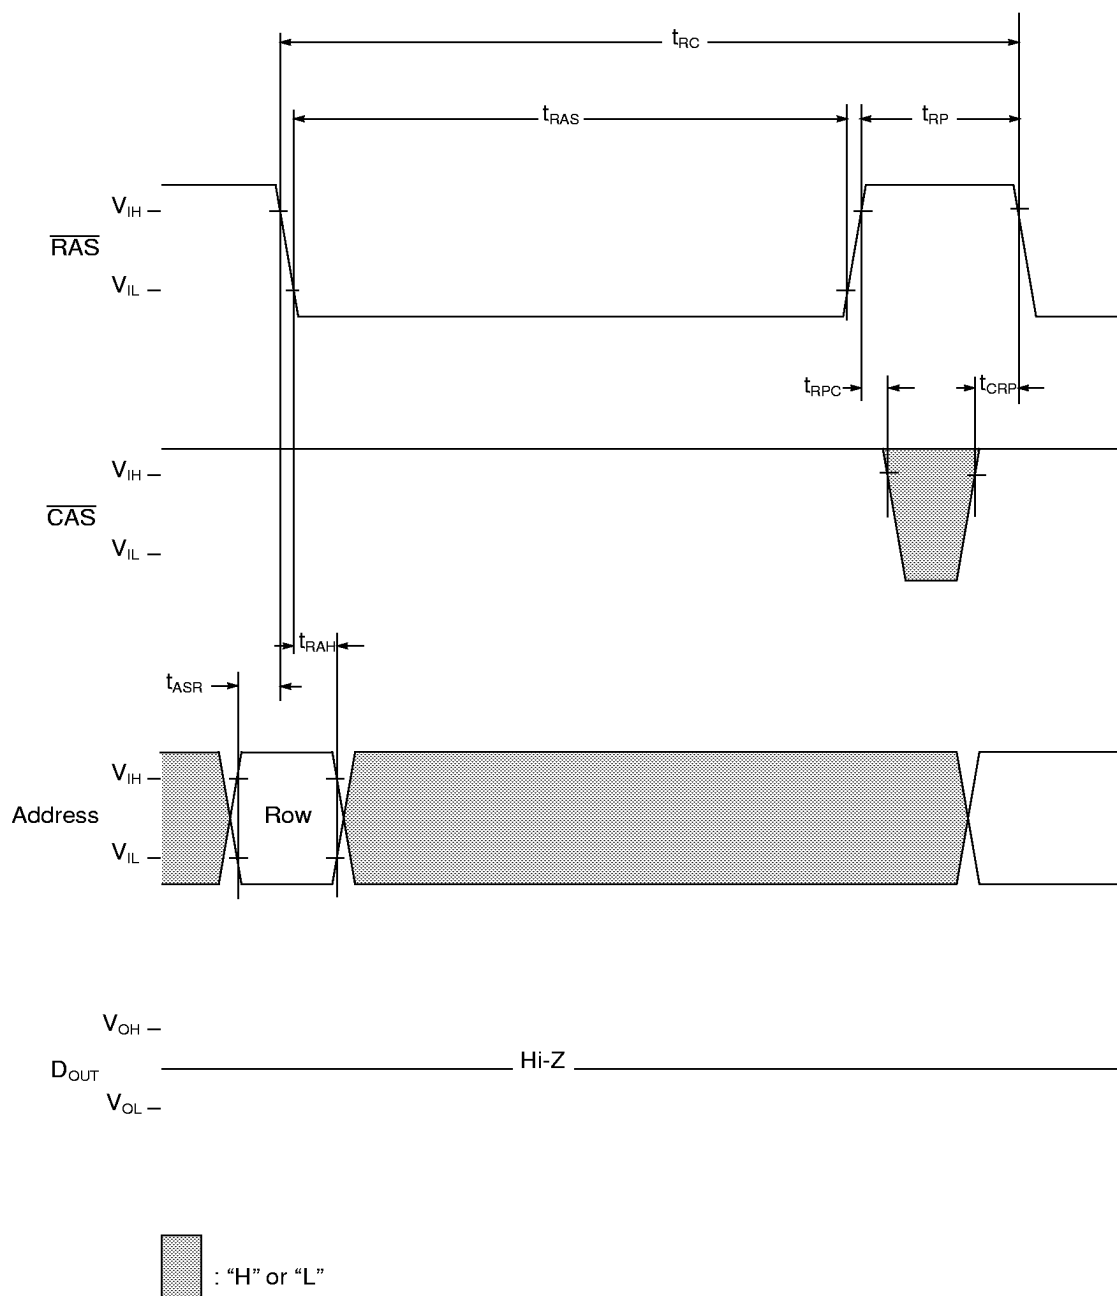


Note: $\overline{\text{WE}}$, $\overline{\text{OE}}$, D_{IN} are "H" or "L"

CAS Before RAS Refresh Cycle

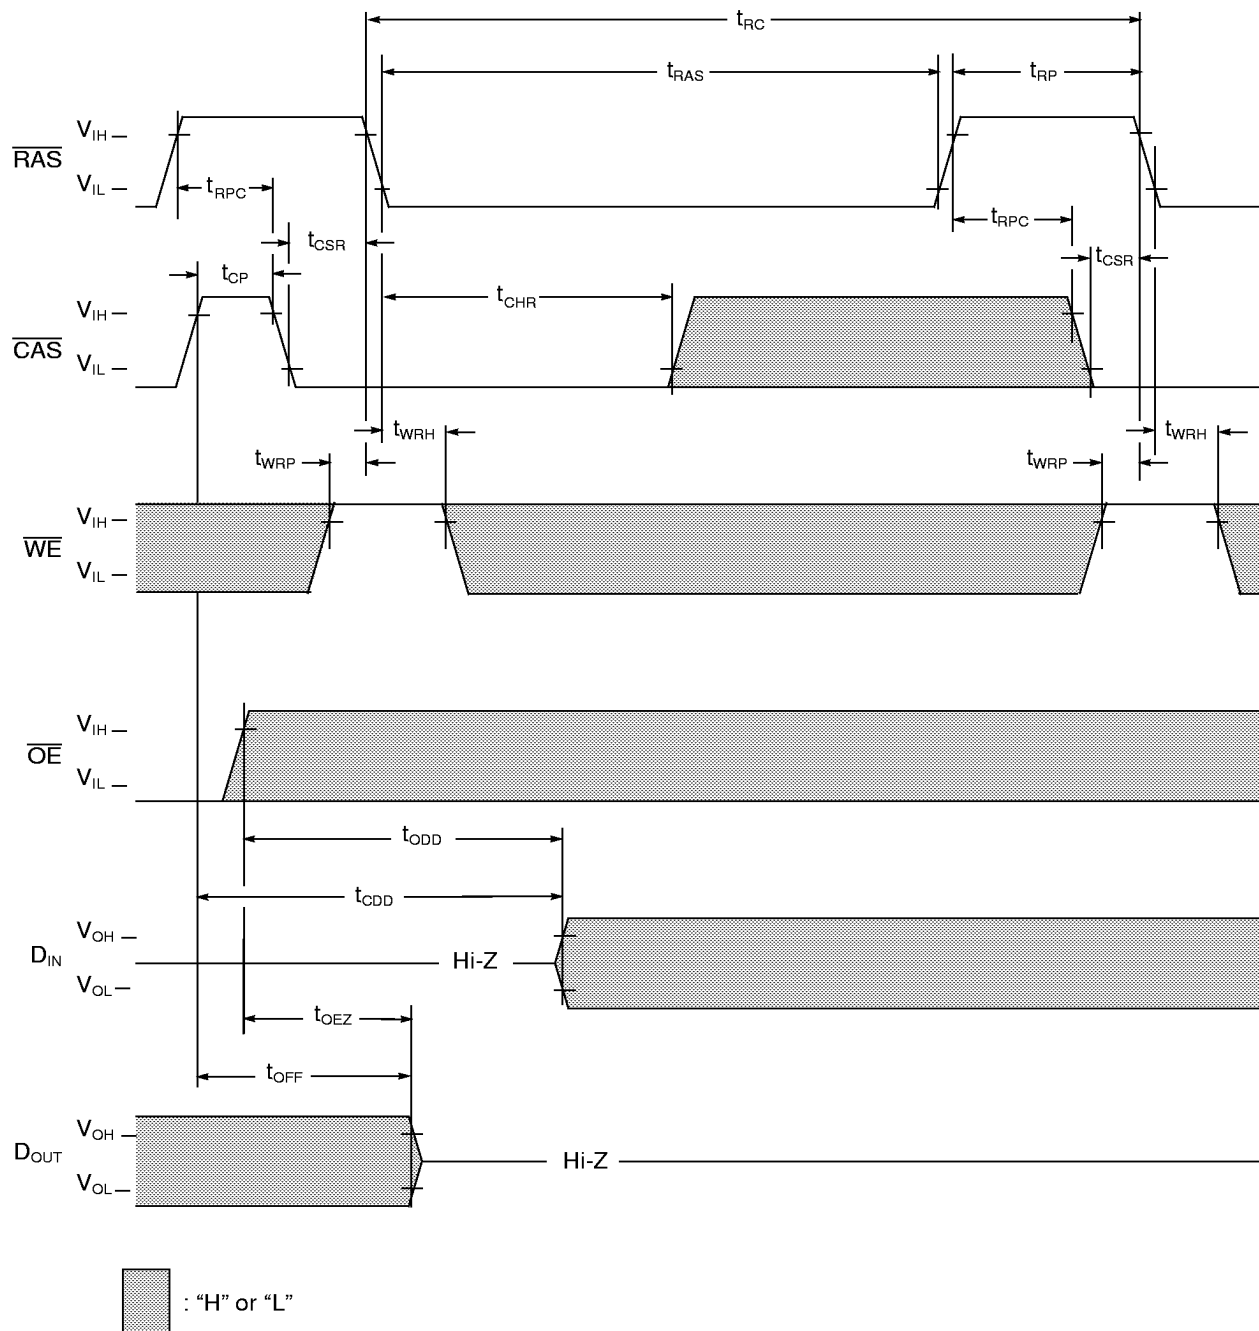


NOTE: Address is "H" or "L"


Hidden Refresh Cycle (Read)

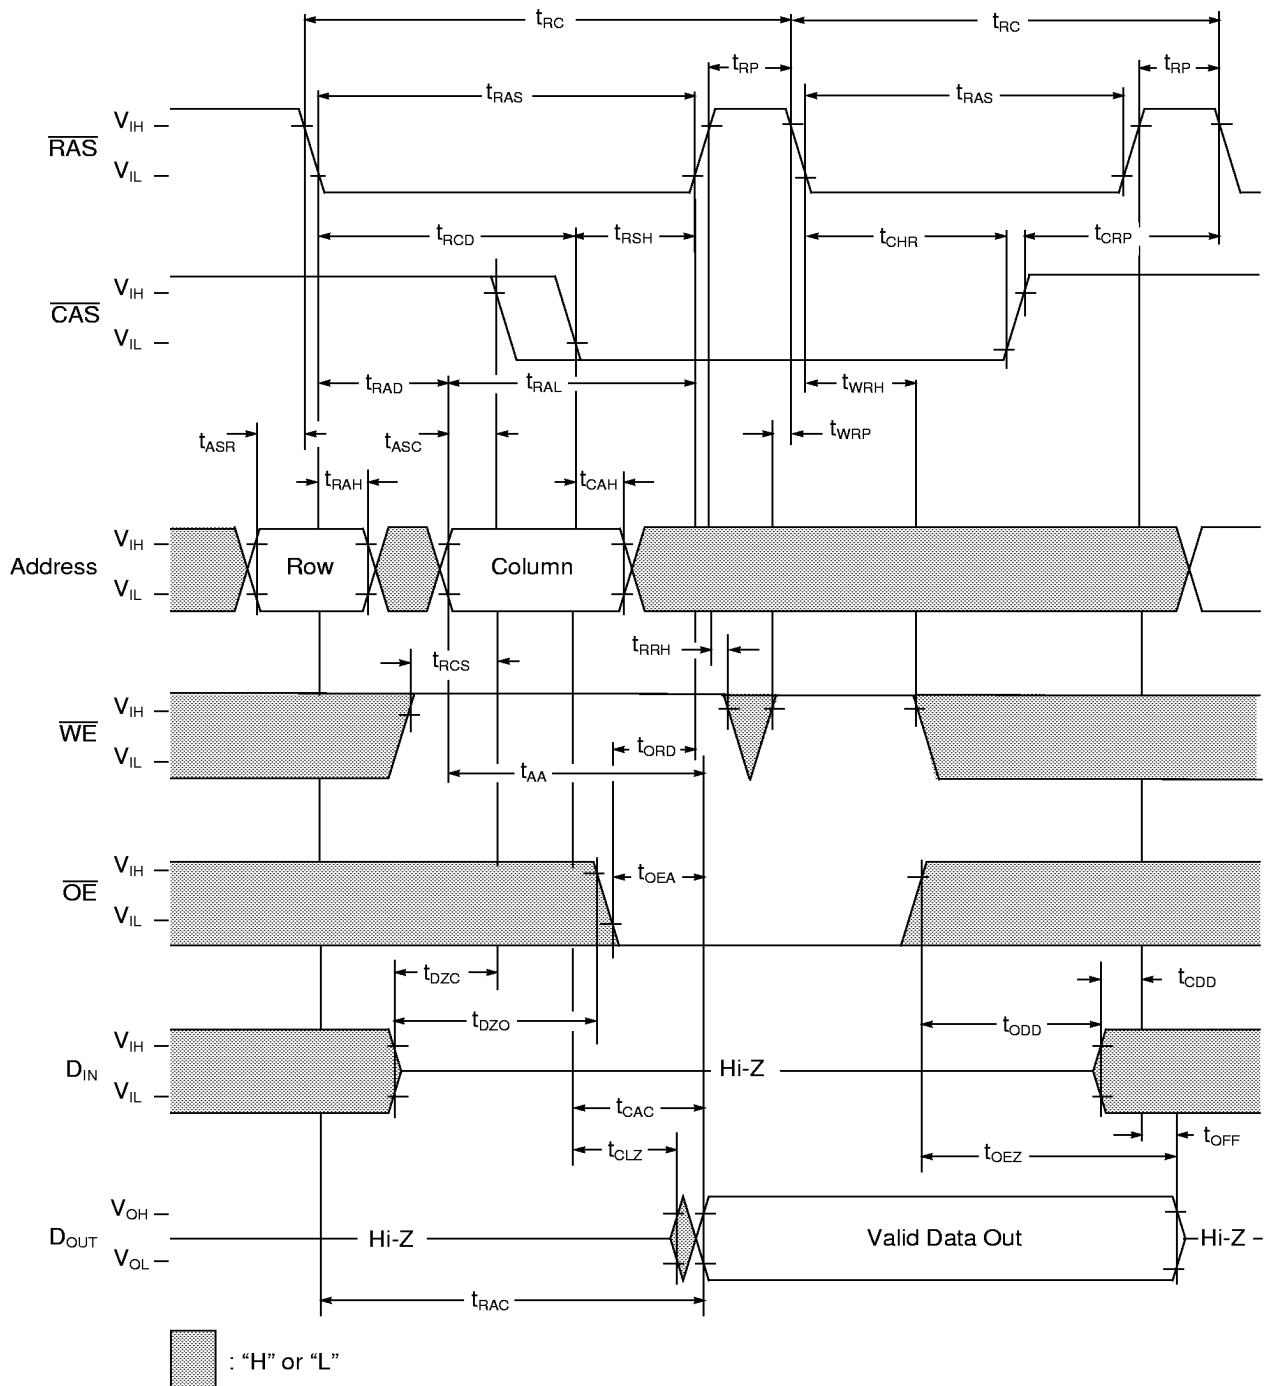

Hidden Refresh Cycle (Write)


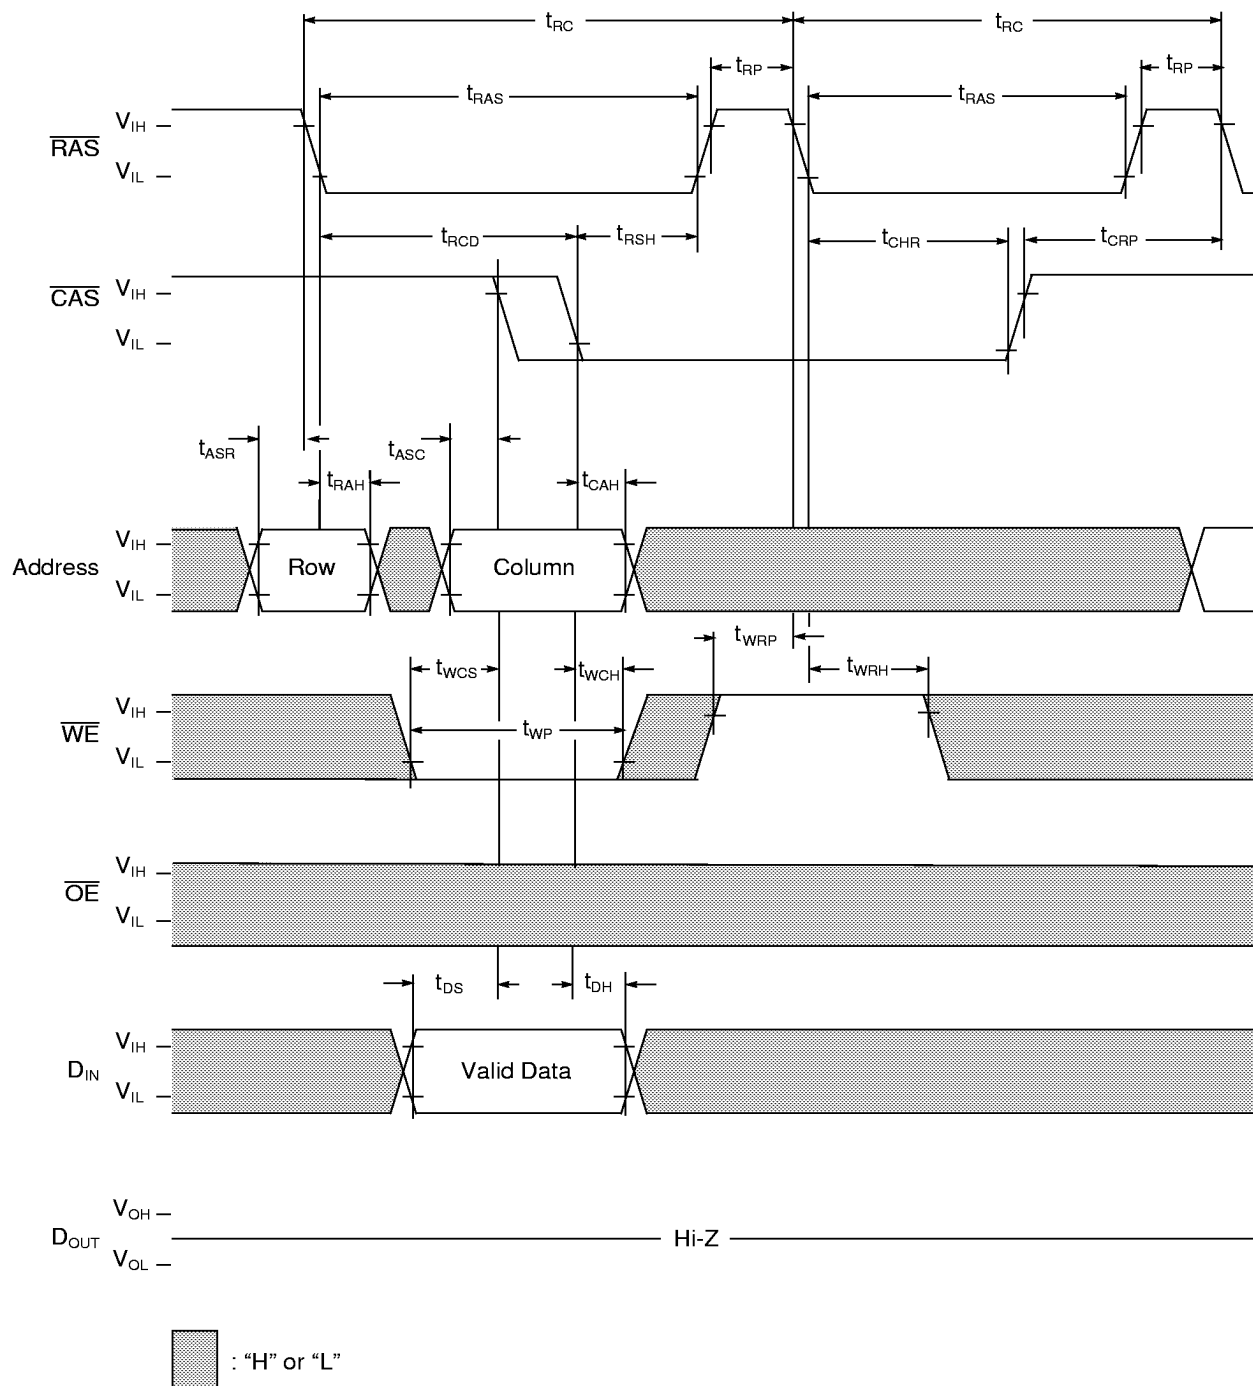


Presence Detect Read Cycle

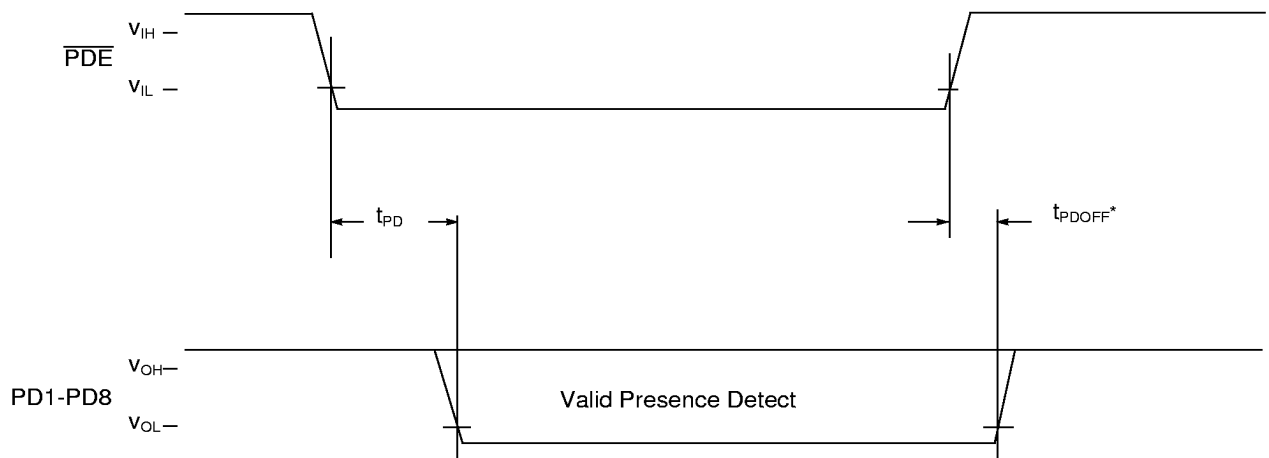

*PD pins must be pulled high at next level of assembly


Layout Drawing 3.3V/5.0V (DRAM in SOJ)

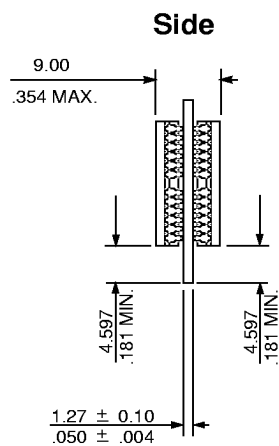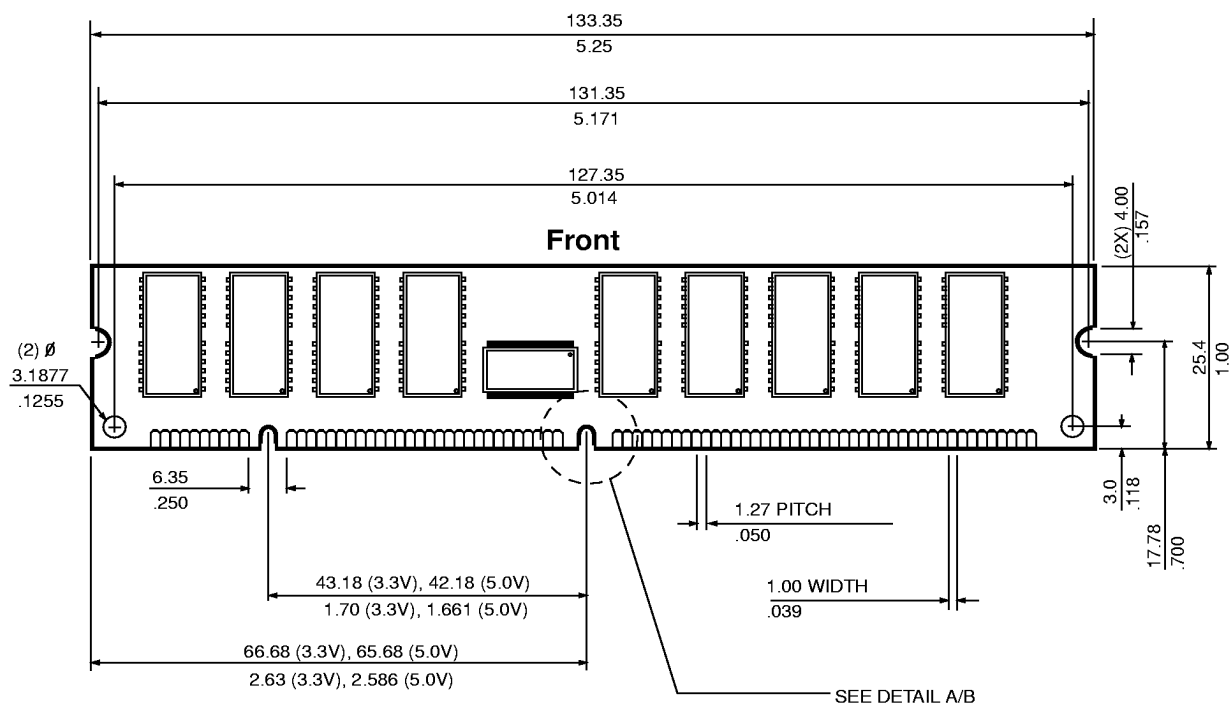

Detail A
3.3V Version

Detail B
5.0V Version

SCALE: 4/1

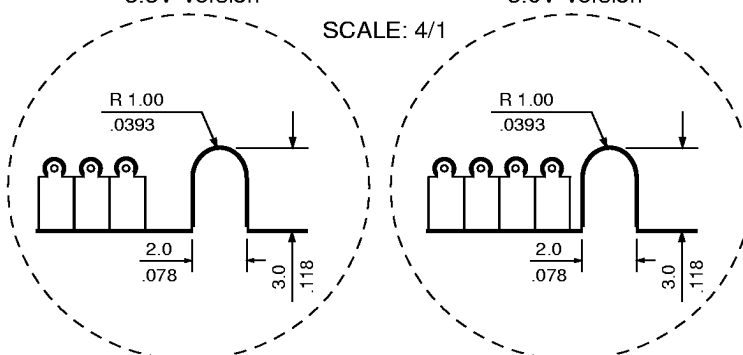

Note: All dimensions are typical unless otherwise stated. Millimeters
Inches

Revision Log

Rev	Contents of Modification
08/95	Initial Release.
3/96	Improved power dissipation Improved DC electrical characteristics: I_{CC1} , I_{CC3} , I_{CC4} , I_{CC6} Updated EDO timing notes. Increased timings: t_{OES} , t_{ORD} Improved timings: t_{CAH} , t_{CDD} , t_{OEZ} , t_{OFF} The CBR timing diagram was changed to allow $\overline{CAS}$ to remain low for back-to-back CBR cycles. Hidden Refresh Cycle (Read) timing diagram was changed to show data being turned off with $\overline{RAS}$ not $\overline{CAS}$
5/96	Updated ordering information.
8/96	Corrected assembly drawing
11/96	Added 50ns speed sort