

WSSCD102SH THRU WSSCD110SH

● **FEATURES**

- * Halogen-free type
- * Lead free product, compliance to RoHS
- * Lead less chip form, no lead damage
- * Lead-free solder joint, no wire bond & lead frame
- * Low power loss, High efficiency
- * High current capability, low VF
- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0

● **APPLICATION**

- * Switching mode power supply applications
- * Portable equipment battery applications
- * General rectification
- * DC / DC Converter
- * Telecommunication

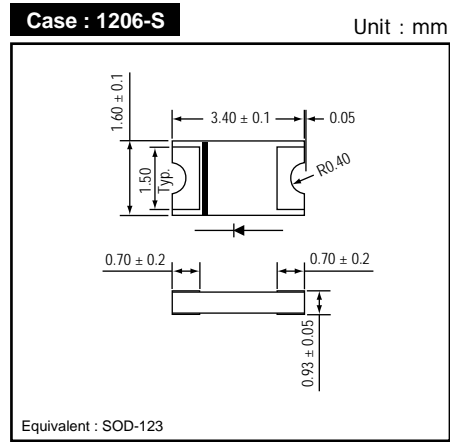
● **MECHANICAL DATA**

Case : Packed with FRP substrate and epoxy underfilled
Terminals : Pure Tin plated (Lead-Free), solderable per MIL-STD-750, Method 2026.
Polarity : Laser Cathode band marking
Weight : 0.012 gram


● **PACKING**

- * 3,000 pieces per 7" (178mm ± 2mm) reel
- * 4 reels per box
- * 6 boxes per carton

● **OUTLINE DIMENSIONS**



● **MARKING**

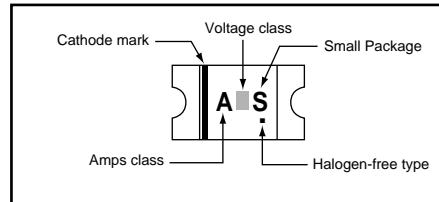





Absolute Maximum Ratings (Ta = 25 °C)

ITEM	Symbol	Conditions	SSCD				Unit
			W102SH	W104SH	W106SH	W110SH	
Repetitive peak reverse voltage	VRRM		20	40	60	100	V
Average forward current	IF(AV)		1.0				A
Peak forward surge current	IFSM	8.3ms single half sine-wave	20				A
Operating junction temperature Range	Tj		-55 to +125		-55 to +150		°C
Storage temperature Range	TSTG		-55 to +150				°C

Electrical characteristics (Ta = 25 °C)

ITEM	Symbol	Conditions	Type	Min.	Typ.	Max.	Unit
Forward voltage (NOTE 1)	VF	IF = 0.1A IF = 0.5A IF = 1.0A	WSSCD102SH / WSSCD104SH	- - -	0.32 0.40 0.46	- - 0.50	V
		IF = 0.1A IF = 0.5A IF = 1.0A	WSSCD106SH	- - -	0.35 0.48 0.62	- - 0.70	V
		IF = 0.1A IF = 0.5A IF = 1.0A	WSSCD110SH	- - -	0.45 0.66 0.76	- - 0.85	V
Repetitive peak reverse current (NOTE 1)	IRRM	VR = Max. VRRM , Ta = 25 °C		-	0.015	0.2	mA
Junction capacitance	Cj	VR = 4V, f = 1.0 MHz		-	110	-	pF
Thermal resistance	Rth(JA)	Junction to ambient (NOTE 2)		-	88	-	°C/W
	Rth(JL)	Junction to lead (NOTE 2)		-	28	-	°C/W

NOTES : (1) Pulse test width PW=300usec , 1% duty cycle.
(2) Mounted on P.C. board with 0.2 x 0.2"(5.0 x5.0mm) copper pad areas.

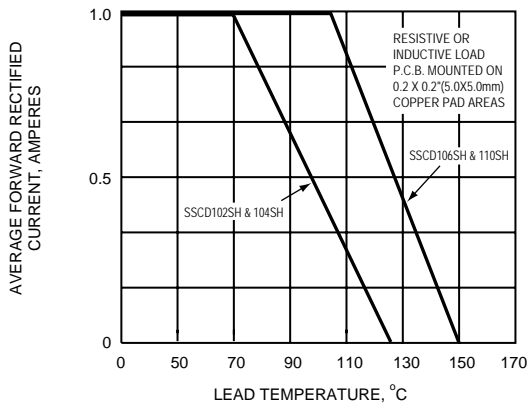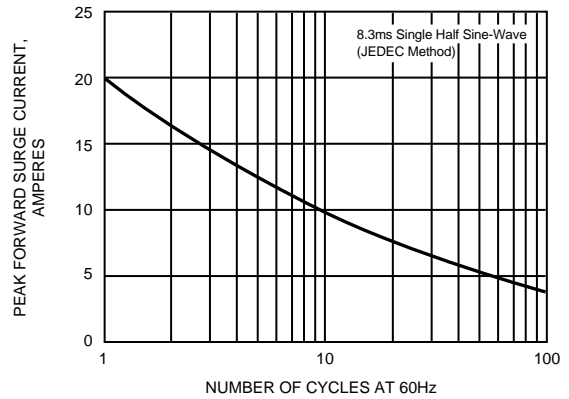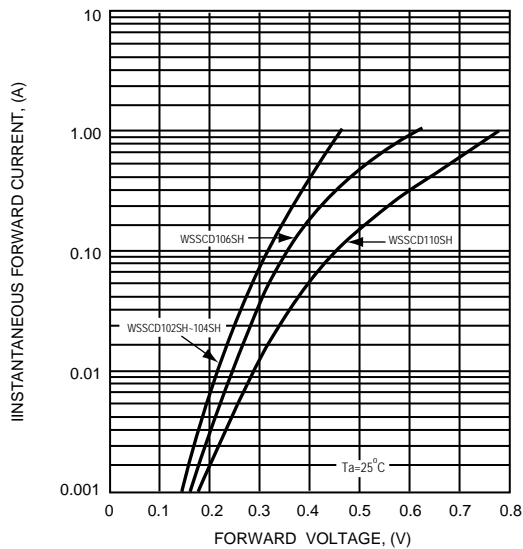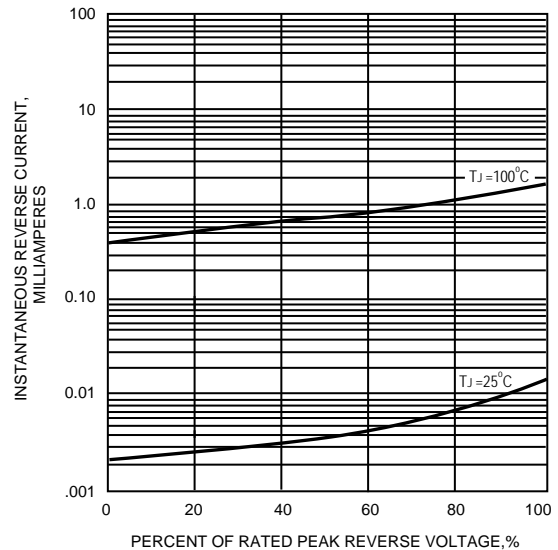FIG.1 - FORWARD CURRENT DERATING CURVE

FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

FIG.4 - TYPICAL REVERSE CHARACTERISTICS

FIG.5 - TYPICAL JUNCTION CAPACITANCE
