

**Specification Status: Released**

**Maximum Electrical Rating**  
**Operating Voltage: 12Vdc**  
**Interrupt Current: 100A**


Chip Size: 3.6 X 10mm

Leads: Nickel 1/4H  
0.125mm nominal thickness

Tape: None

Solder: Lead-Free

Marking: None

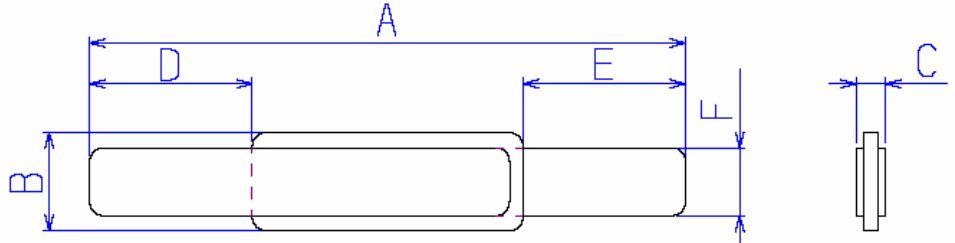

**TABLE I. DIMENSIONS:**

	A		B		C		D		E		F	
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX
mm:	20.8	23.2	3.5	3.7	---	0.7	5.3	6.7	5.3	6.7	2.4	2.6
in*:	(0.81)	(0.91)	(0.14)	(0.15)	--	(0.03)	(0.21)	(0.26)	(0.21)	(0.26)	(0.09)	(0.10)

\*Rounded off approximation

**TABLE II. PERFORMANCE RATINGS: As measured in Mueller Kelvin Clips model BU-75K.**

I HOLD	CURRENT TRIP LIMITS								TIME TO TRIP	REFERENCE RESISTANCE	ONE-HOUR POST-TRIP RESISTANCE	TRIPPED-STATE POWER DISSIPATION				
	AMPS 25°C HOLD		AMPS AT 0°C		AMPS AT 25°C		AMPS AT 60°C						AMPS AT --°C		OHMS AT 25°C	
1.7	2.4	5.6	1.7	4.1	0.7	1.9	---	---	---	5	0.018	0.032	0.018	0.064	---	1.4

Agency Recognitions:  
Reference Documents:  
Precedence:  
Effectivity:  
CAUTION:

UL, TUV, CSA  
PS300  
This specification takes precedence over documents referenced herein.  
Reference documents shall be the issue in effect on the date of invitation for bid.  
Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

**Materials Information:**

**ROHS Compliant**

Directive 2002/95/EC  
Compliant

**ELV Compliant**

Directive 2000/53/EC  
Compliant

**Pb-Free**

