


# PER-C30F

■ Mini-PCI Module With 3-port IEEE 1394a (Firewire)

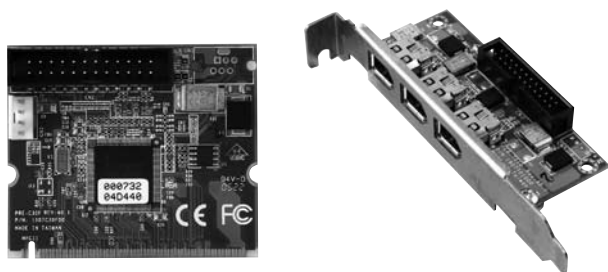

## Specifications

Form Factor	Mini-PCI Type III A 2" x 2.35" (50.8mm x 59.6mm)
IEEE1394a Chipset	TI TS843AB23
Power Requirement	+3.3V, +5V, +12V
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)

## Features

- Three IEEE 1394a Ports Up To 400Mbps
- TI Single Chip For IEEE 1394a Solution

## Packing List


- 1701240150  
Flat Cable
- 9697T01002  
PER-T010 daughter board
- Quick Installation Guide
- Utility CD
- PER-C30F

## Ordering Information

- TF-PER-C30F-A10  
Mini-PCI, 3-port IEEE 1394a Module, Rev. A1.0

# PER-V01B

■ DVI To TTL Mini-PCI Module



## Specifications

Form Factor	Mini-PCI Type III A 2" x 2.35" (50.8mm x 59.6mm)
Signal Conversion Chipset	Silicon Image™ Sil1161CTU
Power Requirement	+3.3V
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)

## Features

- DVI To TTL LCD Signal Conversion
- Resolution Up To 1024 x 768

## Packing List

- Quick Installation Guide
- PER-V01B

## Ordering Information

- TF-PER-V01B-A10  
Mini-PCI, DVI to TTL LCD, Signal Conversion Module, for 640x480 Panel, Rev. A1.0
- TF-PER-V01B-A10-01  
Mini-PCI, DVI to TTL LCD, Signal Conversion Module, for 800x600 Panel, Rev. A1.0
- TF-PER-V01B-A10-02  
Mini-PCI, DVI to TTL LCD, Signal Conversion Module, for 1024x768 Panel, Rev. A1.0

## Optional Accessories

- 1703200151  
20P-20P Terminal Cable