


The specifications for the **LT[®]1182** series have been revised to include an Industrial grade part. For complete specifications, typical performance curves and applications information, please see the **LT1182/LT1183/LT1184/LT1184F** data sheet.

 LTC and LT are registered trademarks of Linear Technology Corporation.

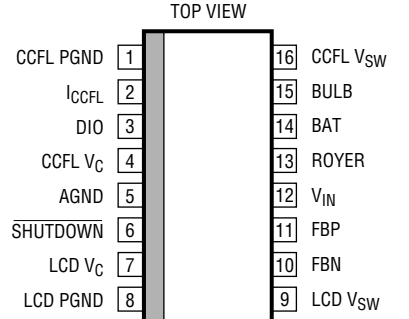
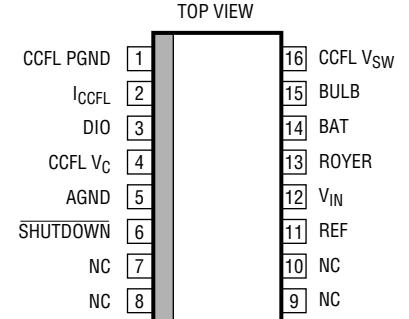
ABSOLUTE MAXIMUM RATINGS

Operating Junction Temperature Range

Commercial 0°C to 100°C

Industrial -40°C to 100°C

PACKAGE/ORDER INFORMATION

TOP VIEW	ORDER PART NUMBER	TOP VIEW	ORDER PART NUMBER
 <p>S PACKAGE 16-LEAD PLASTIC SO T_{JMAX} = 100°C, θ_{JA} = 100°C/W</p>	LT1182CS LT1182IS	 <p>S PACKAGE 16-LEAD PLASTIC SO T_{JMAX} = 100°C, θ_{JA} = 100°C/W</p>	LT1184FCS LT1184FIS

ELECTRICAL CHARACTERISTICS

T_A = 25°C, V_{IN} = 5V, BAT = Royer = Bulb = 12V, I_{CCFL} = SHUTDOWN = CCFL V_{SW} = Open, DIO = GND, CCFL V_C = 0.5V, (LT1182/LT1183) LCD V_C = 0.5V, LCD V_{SW} = Open, (LT1182) FBN = FBP = GND, (LT1183) FB = GND, (LT1183/LT1184/LT1184F) REF = Open, unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS	
	ΔCCFL V _C Source Current for ΔI _{CCFL} Programming Current	I _{CCFL} = 25μA, 50μA, 75μA, 100μA, CCFL V _C = 1.5V T _J < 0°C	●	4.70	4.95	5.20	μA/μA
			●	4.60		5.20	μA/μA
	CCFL High-Side Sense Servo Current	I _{CCFL} = 100μA, I _{V_C} = 0μA at CCFL V _C = 1.5V T _J < 0°C	●	0.93	1.00	1.07	A
			●	0.91		1.07	A

For further information regarding this specification notice contact:

Linear Technology Corporation
 1630 McCarthy Blvd.
 Milpitas, California 95035-7417
 Attn: Product Marketing Manager
 Phone: (408) 432-1900, Ext. 2456