

6

5

4

3

2

1

**MATERIAL AND FINISH:**

Insulator: Impact resistance Polypropylene, black,  
UL-94V-HB rated

PDSN-38-2A (wire leads): PVC, 26 AWG

Contact & terminals:


PDSN-38-2B: Brass, Nickel plated

PDSN-38-2C: Brass, Nickel plated


Spring: Spring Steel, Nickel plated imbedded in  
Polypropylene

**ENVIRONMENTAL:**




Operating temperature: -5°C to +83°C

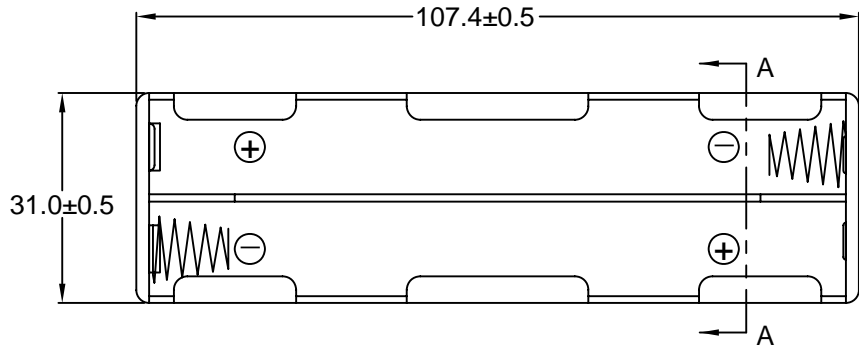


8X "AA"  
BATTERIES




SECTION A-A

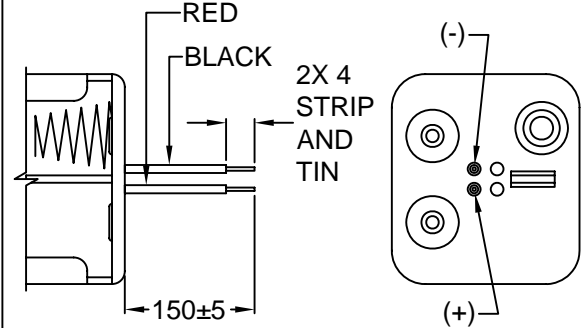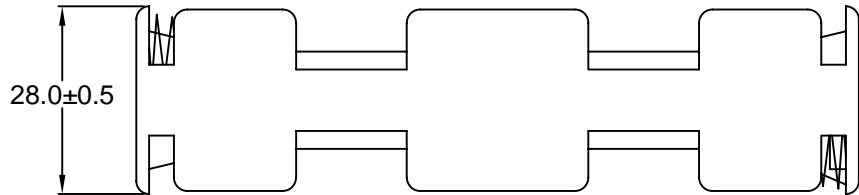

PDSN-38-2A WIRE LEADS

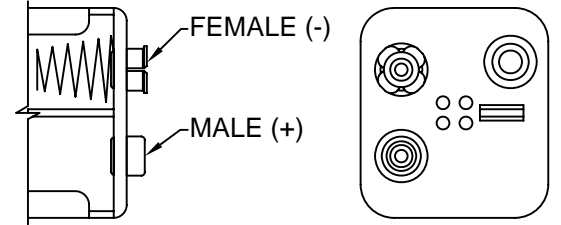

PDSN-38-2B SNAP TERMINAL

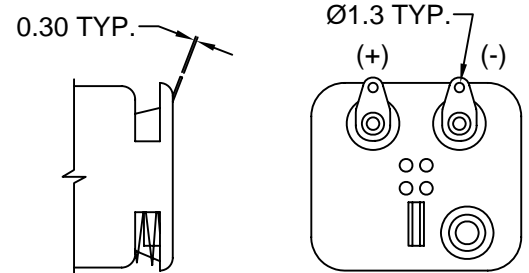

PDSN-38-2C SOLDER LUGS

REV	DATE	CHANGE	CHKG	CHECK	APPR

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.20

DRAWN BY	GQ	DATE:	04/19/02
CHECK BY	TD	DATE:	05/09/02
APPR BY	PB	DATE:	05/09/02

**Power Dynamics, Inc.**

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 8 CELL TYPE "AA" BATTERY HOLDER  
SIDE BY SIDE

PART #: PDSN-38-2X		SHEET 1 of 1
SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	REV:
SCALE: NTS		

6

5

4

3

2

1