


# PER-V02B

■ TTL To DVI Mini-PCI Module

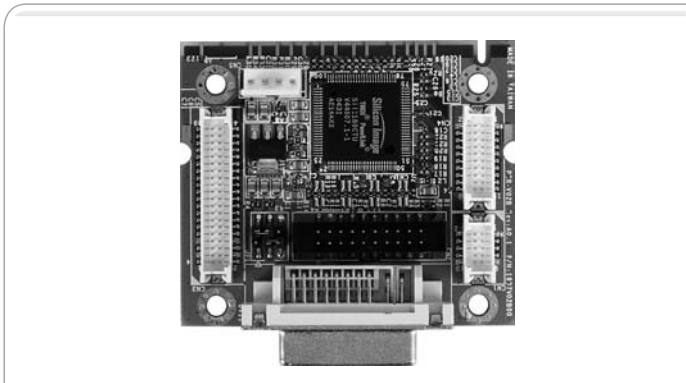

## Specifications

Form Factor	Mini-PCI Type III A 2" x 2.35" (50.8 mm x 59.6 mm)
Signal Conversion Chipset	Silicon Image™ SiI1160CTU
Power Requirement	+3.3V
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)

## Features

- TTL To DVI LCD Signal Conversion
- Resolution Up To 1600 x 1200

## Packing List

- 1703400207  
TTL LCD Cable
- Quick Installation Guide
- PER-V02B

## Ordering Information


- TF-PER-V02B-A10  
Mini-PCI, TTL to DVI LCD, Signal Conversion Module, Rev. A1.0

## Optional Accessories

- 1700200200  
DVI Cable
- 1703400207  
TTL Cable

# PER-V05V

■ Mini-PCI Video Module

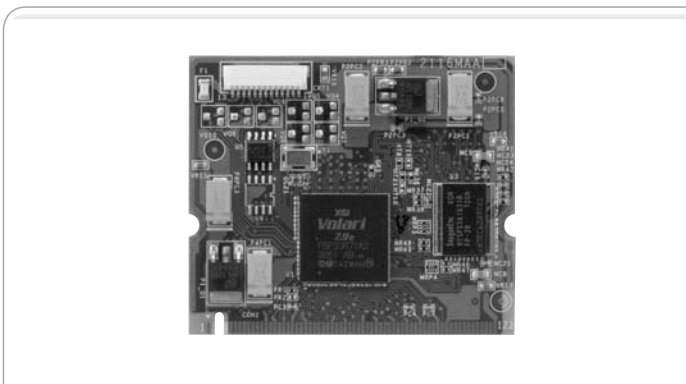

## Specifications

Form Factor	Mini-PCI Type III A 2" x 2.35" (50.8mm x 59.6mm)
Graphic Chipset	Volari™ Z9s (100 MHz)
Display	CRT output
Resolution	Up to 1600 x 1200 @ 85 MHz
Power Requirement	+3.3V
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)

## Features

- Mini-PCI Type III Interface
- One VGA Output, Resolution Up To 1600 x 1200 @ 85 Hz
- Memory Size 32M DDRII

## Packing List

- 1703150070  
D-Sub Cable
- Quick Installation Guide
- Utility CD
- PER-V05V

## Ordering Information

- TF-PER-V05V-A11  
Mini-PCI VGA Module, Rev. A1.1