



Micro Commercial Components



Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

1N3821A
THRU
1N3828A

1.0 Watt
Zener Diode
3.3 to 6.2 Volts

DO-41G

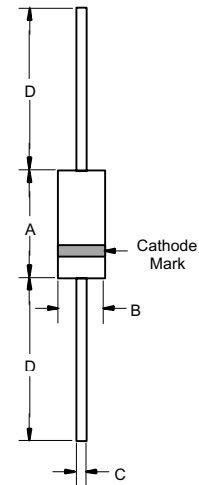


Table with 5 columns: DIM, INCHES (MIN, MAX), MM (MIN, MAX), and NOTE. It lists dimensions A, B, C, and D with their respective minimum and maximum values in inches and millimeters.

Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Table with 4 columns: Parameter, Symbol, Value, and Unit. It lists various electrical and thermal parameters such as Forward Voltage (VF), Power Dissipation (Ptot), Power Derating, Operating Temperature (Tj), and Storage Temperature Range (TSTG).

Note: 1. Lead in Glass Exemption Applied, see EU Directive Annex 5.

1N3821A THRU 1N3828A



ELECTRICAL CHARACTERISTICS @25°C


TYPE NUMBER	NOMINAL		MAXIMUM ZENER IMPEDANCE		MAX. DC	MAX. REVERSE	
	ZENER	TEST CURRENT			ZENER		
	VOLTAGE		CURRENT	LEAKAGE CURRENT			
	VZ @ IZT	IZT	IZM	IR @ VR			
(NOTE 1)	(NOTE 3)	(NOTE 2)					
	VOLTS	mA	OHMS	OHMS	mA	μ A	VOLTS
1N3821	3.3	76	10	400	276	100	1
1N3821A	3.3	76	10	400	276	100	1
1N3822	3.6	69	10	400	252	75	1
1N3822A	3.6	69	10	400	252	75	1
1N3823	3.9	64	9	400	238	25	1
1N3823A	3.9	64	9	400	238	25	1
1N3824	4.3	58	9	400	213	5	1
1N3824A	4.3	58	9	400	213	5	1
1N3825	4.7	53	8	500	194	5	1
1N3825A	4.7	53	8	500	194	5	1
1N3826	5.1	49	7	550	178	3	1
1N3826A	5.1	49	7	550	178	3	1
1N3827	5.6	45	5	600	162	3	2
1N3827A	5.6	45	5	600	162	3	2
1N3828	6.2	41	2	700	146	3	3
1N3828A	6.2	41	2	700	146	3	3

NOTE 1 No suffix = ± 10% tolerance on nominal Zener voltage, suffix "A" signifies ±5%, suffix "C" signifies ± 2%.

NOTE 2 Zener impedance is derived by superimposing on I_{ZT} A 60Hz rms a.c. current equal to 10% of I_{ZT} .

NOTE 3 Zener voltage is measured with the device junction in thermal equilibrium at an ambient temperature of 25°C ± 3°C.

FIGURE 1

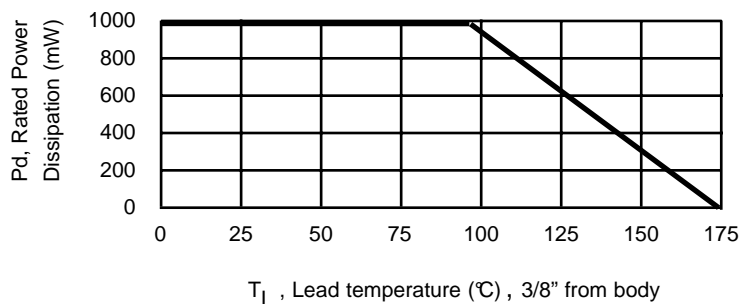

POWER DERATING CURVE

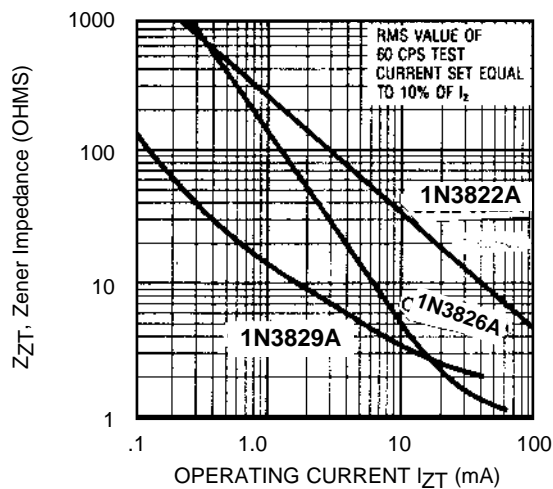


FIGURE 2
ZENER IMPEDANCE VS. OPERATING CURRENT



™

Micro Commercial Components

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel: 5Kpcs/Reel
Part Number-AP	Ammo Packing: 2.5Kpcs/Ammo Box
Part Number-BP	Bulk: 50Kpcs/Carton

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

CUSTOMER AWARENESS

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.