

# 2.54mm PITCH CENTER SINGLE ROW PIN WAFER BREAKABLE Right Angle Type




## 254201MR Series

Mates With SUYIN 254330, 254250, 254401 Series

### Specifications:

- 2~40 Circuits
- Insulator Material : P.B.T UL94V-0
- Operating Temp. Range : -40°C To +105°C
- Terminal Material : Brass
- Platings : Gold Or Tin Plated
- Max. Current Rating : 1.5A
- Max. Voltage Rating : 250V AC
- Dielectric Strength : 500V AC For 60 Seconds

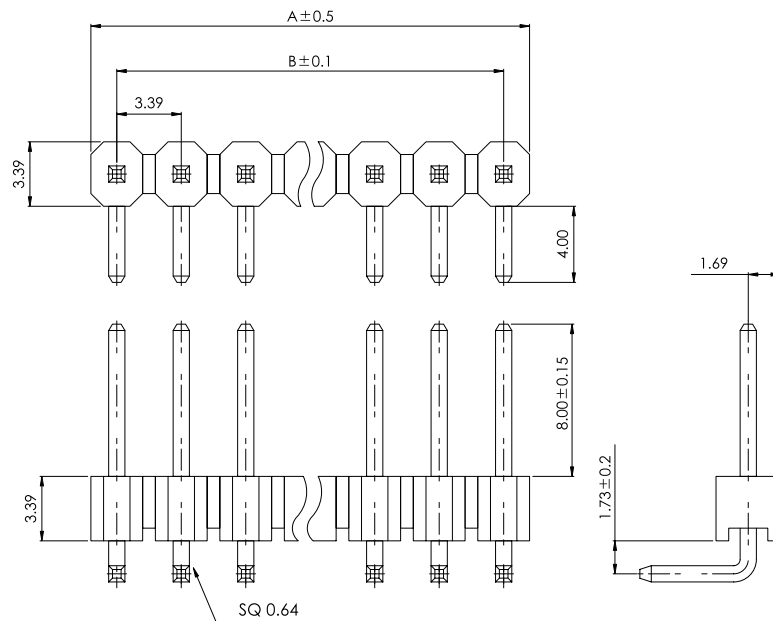

2.54  
mm

## Order Information


254201MR□□□□20ZO  
1 2 3 4 5

1. 'R' : Right Angle DIP Type
2. No. of Pins
3. Plating
4. Color 'Z' : Black
5. Package

'O' : Slim Box Without CAP

Reference Page 11

## Recommended P.C.B. Layout

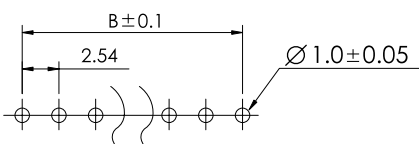

## Dimension Information

SUYIN P/NO.	DIM.A	DIM.B	SUYIN P/NO.	DIM.A	DIM.B
254201MR002□□20ZO	5.08	2.54	254201MR022□□20ZO	55.88	53.34
254201MR003□□20ZO	7.62	5.08	254201MR023□□20ZO	58.42	55.42
254201MR004□□20ZO	10.16	7.62	254201MR024□□20ZO	60.96	58.42
254201MR005□□20ZO	12.70	10.16	254201MR025□□20ZO	63.50	60.96
254201MR006□□20ZO	15.24	12.70	254201MR026□□20ZO	66.04	63.50
254201MR007□□20ZO	17.78	15.24	254201MR027□□20ZO	68.58	66.04
254201MR008□□20ZO	20.32	17.78	254201MR028□□20ZO	71.12	68.58
254201MR009□□20ZO	22.86	20.32	254201MR029□□20ZO	73.66	71.12
254201MR010□□20ZO	25.40	22.86	254201MR030□□20ZO	76.20	73.66
254201MR011□□20ZO	27.94	25.40	254201MR031□□20ZO	78.74	76.20
254201MR012□□20ZO	30.48	27.94	254201MR032□□20ZO	81.28	78.74
254201MR013□□20ZO	33.02	30.48	254201MR033□□20ZO	83.82	81.28
254201MR014□□20ZO	35.56	33.02	254201MR034□□20ZO	86.36	83.82
254201MR015□□20ZO	38.10	35.56	254201MR035□□20ZO	88.90	86.36
254201MR016□□20ZO	40.64	38.10	254201MR036□□20ZO	91.44	88.90
254201MR017□□20ZO	43.18	40.64	254201MR037□□20ZO	93.98	91.44
254201MR018□□20ZO	45.72	43.18	254201MR038□□20ZO	96.52	93.98
254201MR019□□20ZO	48.26	45.72	254201MR039□□20ZO	99.06	96.52
254201MR020□□20ZO	50.80	48.26	254201MR040□□20ZO	101.60	99.06
254201MR021□□20ZO	53.34	50.80			