


SMD Shielded type

▼ Shape & Dimensions / Recommended Solder Land Pattern

(Dimensions in mm)

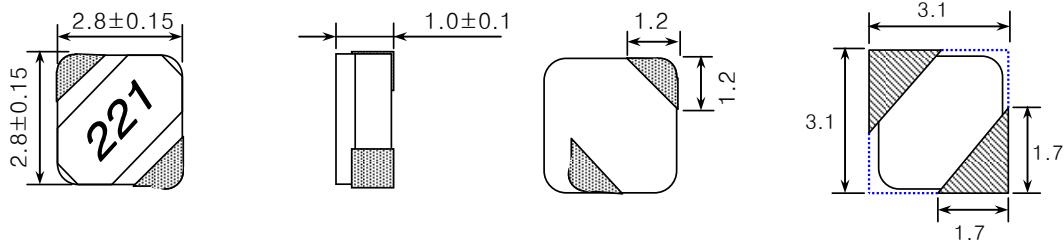

▼ Electrical Characteristics

Ordering Code	Inductance		Frequency (KHz)	DC Resistance(Ω) (Max.)	Rated DC current(A)	
	L (uH)	Tol. (%)			I _{dc1} (Max.)	I _{dc2} (Typ.)
LPF2810T-1R5M	1.5	±20	100	0.11	1.20	1.71
LPF2810T-2R2M	2.2			0.20	1.00	1.31
LPF2810T-4R7M	4.7			0.33	0.85	0.85
LPF2810T-6R8M	6.8			0.46	0.70	0.72
LPF2810T-100M	10	±20	100	0.59	0.55	0.63
LPF2810T-150M	15			0.95	0.44	0.43
LPF2810T-220M	22			2.00	0.35	0.38
LPF2810T-101M	100	±20	100	3.62	0.10	0.24
LPF2810T-151M	150			5.75	0.08	0.20
LPF2810T-221M	220			9.15	0.095	0.15
LPF2810T-331M	330			14.65	0.05	0.115

▼ Test Equipments

- . L : Agilent E4980A Precision LCR Meter
- . Rdc : HIOKI 3540 mΩ HiTESTER
- . I_{dc1} : Agilent 4284A LCR Meter + Agilent 42841A Bias Current Source
- . I_{dc2} : Yokogawa DR130 Hybrid Recorder + Agilent 6692A DC Power Supply

□ Packing style

T : Taping B : Bulk

▼ Test Condition

- . L(Frequency , Voltage) : F=100 (KHz) , V=0.5 (V)
- . I_{dc1}(The saturation current) : $\Delta L \leq 30\%$ reduction from nominal L value
- . I_{dc2}(The temperature rise) : $\Delta T = 40^\circ\text{C}$ typical at rated DC current
- * Rated DC current(I_{dc}) : The value of I_{dc1} or I_{dc2} , whichever is smaller

▼ Operating Temperature Range

-30 ~ +85°C (Including self-generated heat)