
# **ATS Extrusion Profiles**



#### ATS PART # ATS-EXL14-150-R0

## **Features & Benefits**


- » Aluminum extrusions are the most costeffective solution for the majority of electronic cooling applications
- » This extrusion profile has 12 fins
- » Extrusion type is straight fin, AL-6063
- » Surface area (in²/in) is 57.10

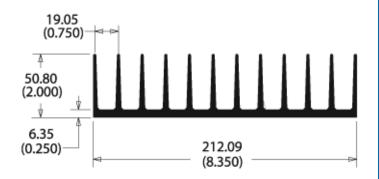

\*Image above is for illustration purposes only.

# **Thermal Performance**

#### HEAT SINK THERMAL RESISTANCE

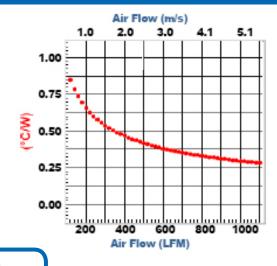

## **Product Details**

| LENGTH   | WIDTH     | HEIGHT  | FIN SPACING | BASE THICKNESS | FINISH |
|----------|-----------|---------|-------------|----------------|--------|
| 152.4 mm | 212.09 mm | 50.8 mm | 7.92 mm     | 6.35 mm        | NONE   |

#### NOTES:

- 1) Thermal curve based on 76 mm length.
- Thermal performance data are provided for reference only. Actual performance may vary by application.
- ATS reserves the right to update or change its products without notice to improve the design or performance.
- 4) Contact ATS to learn about custom options available.



For more information, to find a distributor or to place an order, visit www.Qats.com or call: 781.769.2800 (North America); +31 (0) 3569 84715 (Europe).