


Specifications


Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	121.6	121.8	122
Insertion Loss	dB	-	20	25
1.2 dB Bandwidth	MHz	25.1	25.8	-
3 dB Bandwidth	MHz	25.2	26.39	-
10 dB Bandwidth	MHz	-	27.46	-
20 dB Bandwidth	MHz	-	28.42	-
35 dB Bandwidth	MHz	-	29.84	31
40 dB Bandwidth	MHz	-	31.42	-
Passband Variation	dB	-	0.9	1.2
Absolute Delay	usec	-	1.15	1.5
Phase Linearity($f_0 \pm 12\text{MHz}$)	deg	-	7	10
Group Delay Variation($f_0 \pm 12\text{MHz}$)	nsec	-	50	200
Ultimate Rejection(Over $f_0 \pm 20\text{MHz}$)	dB	40	42	-
Material Temperature coefficient	KHz/°C	-11.45		
Ambient Temperature	°C	25		
Package Size	SMD13.3*6.5C			

Notes:


1. All specifications are based on the test circuit shown
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance show

Matching Configuration

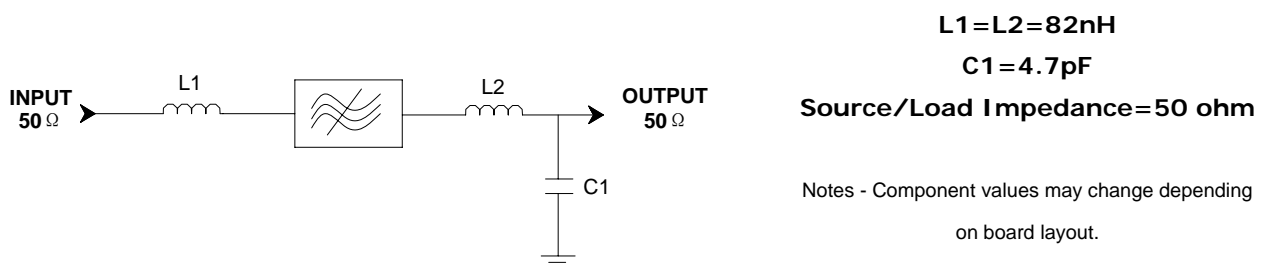

	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	LBN12205	
		Rev. Date	2007-04-23	
		Ver.	1.0	Page

Package Dimension

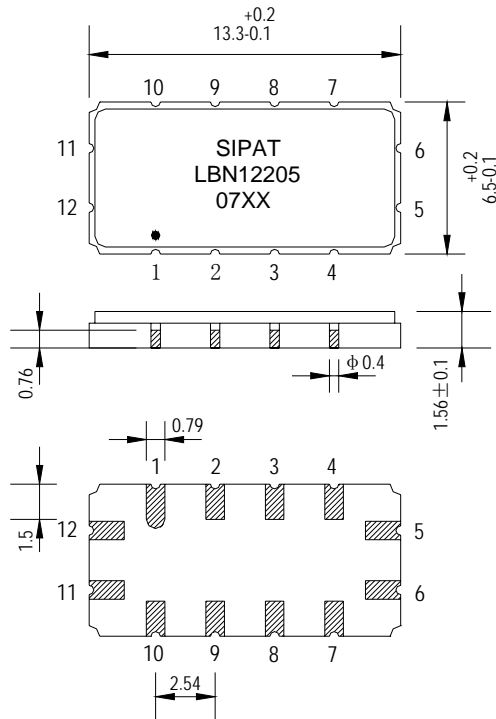

- 1) ∴ Pad Number 1 Index
- 2) SIPAT: Manufacturer name
- 3) LBN12205: Part Number
- 4) 07XX: Date Code

Input	11
Output	5
Ground	1,2,3,4,6, 7,8,9,10,12

Package: SMD13.3*6.5C

Unit: mm




SIPAT Co., Ltd.
(CETC No. 26 Research Institute)
Nanping Huayuan Road No. 14
Chongqing, China, 400060

Part Number	LBN12205	
Rev. Date	2007-04-23	
Ver.	1.0	Page 2/4


Typical Performance

Frequency Respond

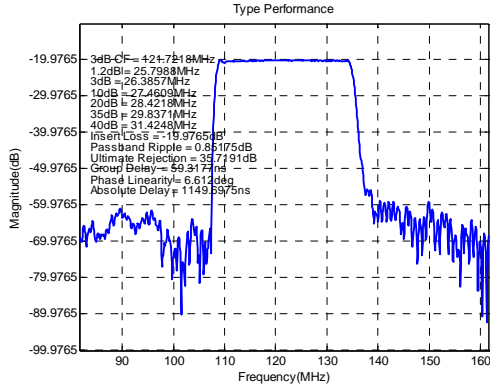


Horizontal: 10MHz/Div Vertical: 10dB/Div

Passband Respond

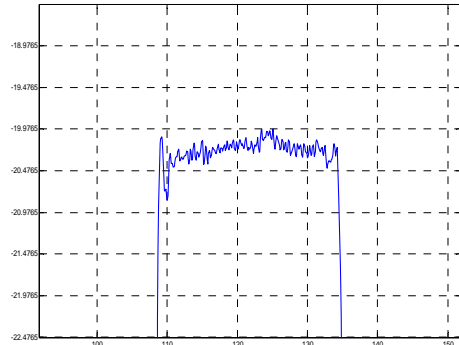


Horizontal: 10MHz/Div Vertical: 0.5dB/Div

Group Delay Variation($f_0 \pm 12$ MHz)

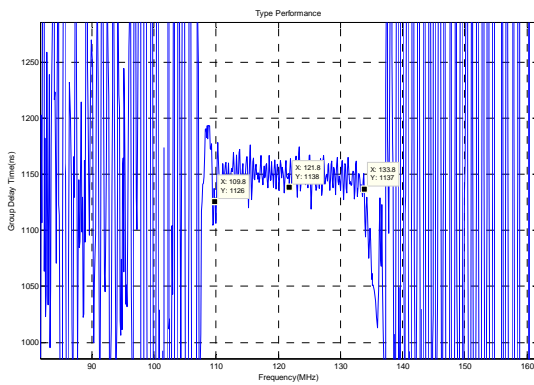


Horizontal: 10MHz/Div Vertical: 50ns/Div

Phase Linearity($f_0 \pm 12$ MHz)

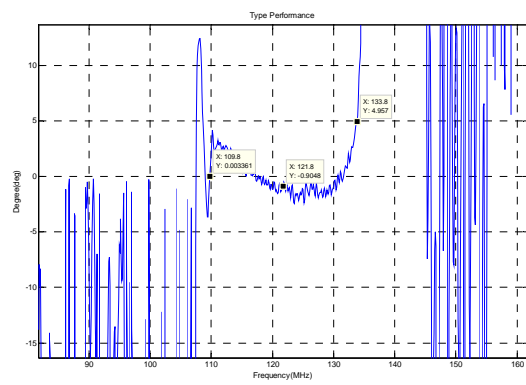


Horizontal: 10MHz/Div Vertical: 5deg/Div

Smith Chart S11

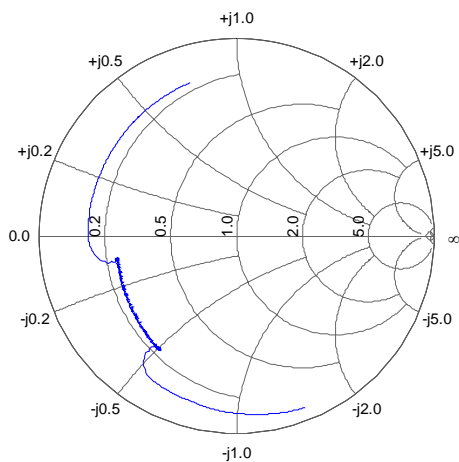

Smith Chart S22

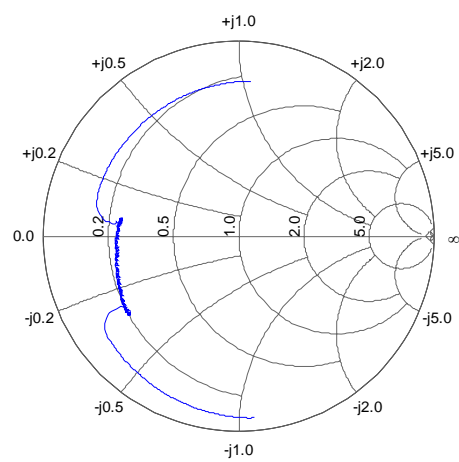

SIPAT Co., Ltd.
(CETC No. 26 Research Institute)
Nanping Huayuan Road No. 14
Chongqing, China, 400060

Part Number LBN12205

Rev. Date 2007-04-23

Ver. 1.0

Page 3/4

Maximum Ratings

Operating Temperature Range	°C	[-40°C;+85°C]
Storage Temperature Range	°C	[-40°C;+105°C]
DC Voltage	V	0
Input Power	dBm	10 max
ESD Class		1



SIPAT Co., Ltd.
(CETC No. 26 Research Institute)
Nanping Huayuan Road No. 14
Chongqing, China, 400060

Part Number	LBN12205		
Rev. Date	2007-04-23		
Ver.	1.0	Page	4/4