




## SKT - Surge Arresters

### 3-Electrode Ceramic Surge Arrester

■ COMMON DIMENSIONS




SKT-3R-A Type (  $\phi$  6x8 )


Electrical Characteristics										
Type	DC spark-over voltage (100V/s) V	Impulse spark-over voltage (1KV/us) V	Impulse discharge current (10/1000us 300times) A	Impulse discharge current (8/20us 10times) KA	AC discharge current (50Hz 1s 5 times) A	Holdover Voltage V	Insulation resistance $\Omega$	Capacitance pF	Transverse voltage durationns	
SKT-3R-75A	75±25%	≤600	50	5	5	/	≥10 <sup>10</sup>	<1.5	≤200	
SKT-3R-90A	90±25%	≤600	50	5	5	/	≥10 <sup>10</sup>	<1.5	≤200	
SKT-3R-105A	150±20%	≤700	100	5	5	80	≥10 <sup>10</sup>	<1	≤200	
SKT-3R-230A	230 <sup>+30</sup> -40	I	≤800	100	5	5	80	≥10 <sup>10</sup>	<1	≤200
		II	≤500	/						
SKT-3R-350A	350±20%	I	≤800	100	5	5	80	≥10 <sup>10</sup>	<1	≤200
		II	≤600	/						
SKT-3R-470A	470±20%	I	≤900	100	5	5	80	≥10 <sup>10</sup>	<1	≤200
		II	≤700	/						
SKT-3R-600A	600±20%	≤1200	100	5	5	80	≥10 <sup>10</sup>	<1	≤200	

Note: Specification are subject to change without notice.


■ COMMON DIMENSIONS

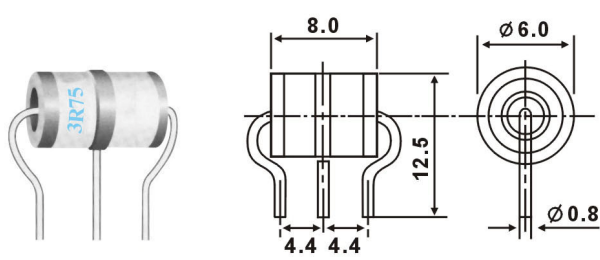


SKT-3R-AL<sub>1</sub> Type (Φ 6x8)

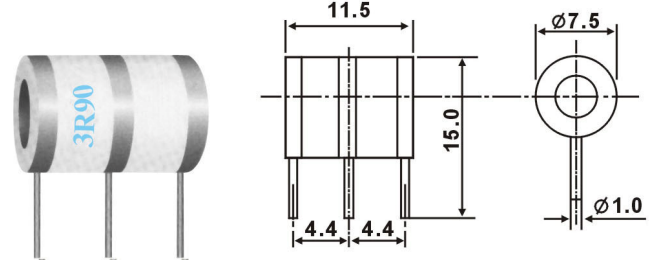

SKT-3R-AL<sub>2</sub> Type (Φ 7.5x11.5)

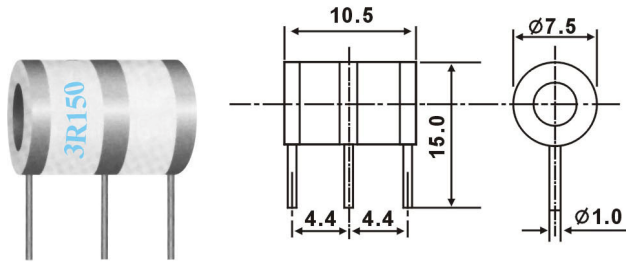

SKT-3R-AL<sub>3</sub> Type (Φ 7.5x10.5)

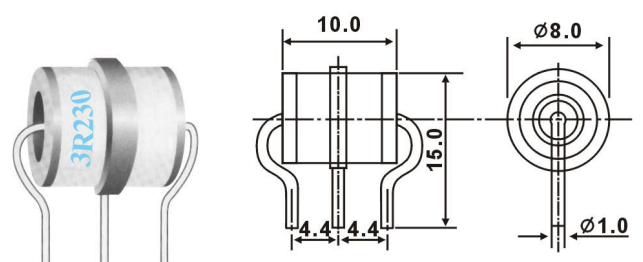


SKT-3R-AL<sub>4</sub> Type (Φ 8x10)

**Electrical Characteristics**

Type	DC spark over voltage (100V/s) V	Impulse spark over voltage (1KV/us) V	Impulse discharge current (10/1000us 300times) A	Impulse discharge current (8/20us 10times) KA	AC discharge current (50Hz 1s 5 times) A	Holdover Voltage V	Insulation resistance Ω	Capacitance pF	Transverse voltage durations
SKT-3R-75AL <sub>1</sub> SKT-3R-75AL <sub>2</sub> SKT-3R-75AL <sub>3</sub> SKT-3R-75AL <sub>4</sub>	75±25%	≤600	50	10	10	/	≥10 <sup>10</sup>	<1.5	≤200
SKT-3R-90AL <sub>1</sub> SKT-3R-90AL <sub>2</sub> SKT-3R-90AL <sub>3</sub> SKT-3R-90AL <sub>4</sub>	90±25%	≤600	50	10	10	/	≥10 <sup>10</sup>	<1.5	≤200
SKT-3R-150AL <sub>1</sub> SKT-3R-150AL <sub>2</sub> SKT-3R-150AL <sub>3</sub> SKT-3R-150AL <sub>4</sub>	150±20%	≤700	100	10	10	80	≥10 <sup>10</sup>	<1	≤200
SKT-3R-230AL <sub>1</sub> SKT-3R-230AL <sub>2</sub> SKT-3R-230AL <sub>3</sub> SKT-3R-230AL <sub>4</sub>	230	I	≤800	100	10	135	≥10 <sup>10</sup>	<1	≤200
		II	≤500	/					
SKT-3R-350AL <sub>1</sub> SKT-3R-350AL <sub>2</sub> SKT-3R-350AL <sub>3</sub> SKT-3R-350AL <sub>4</sub>	350±20%	I	≤800	100	10	135	≥10 <sup>10</sup>	<1	≤200
		II	≤600	/					
SKT-3R-470AL <sub>1</sub> SKT-3R-470AL <sub>2</sub> SKT-3R-470AL <sub>3</sub> SKT-3R-470AL <sub>4</sub>	470±20%	I	≤900	100	10	135	≥10 <sup>10</sup>	<1	≤200
		II	≤700	/					
SKT-3R-600AL <sub>1</sub> SKT-3R-600AL <sub>2</sub> SKT-3R-600AL <sub>3</sub> SKT-3R-600AL <sub>4</sub>	600±20%	≤1200	100	10	10	135	≥10 <sup>10</sup>	<1	≤200


Note: Specification are subject to change without notice.

■ COMMON DIMENSIONS

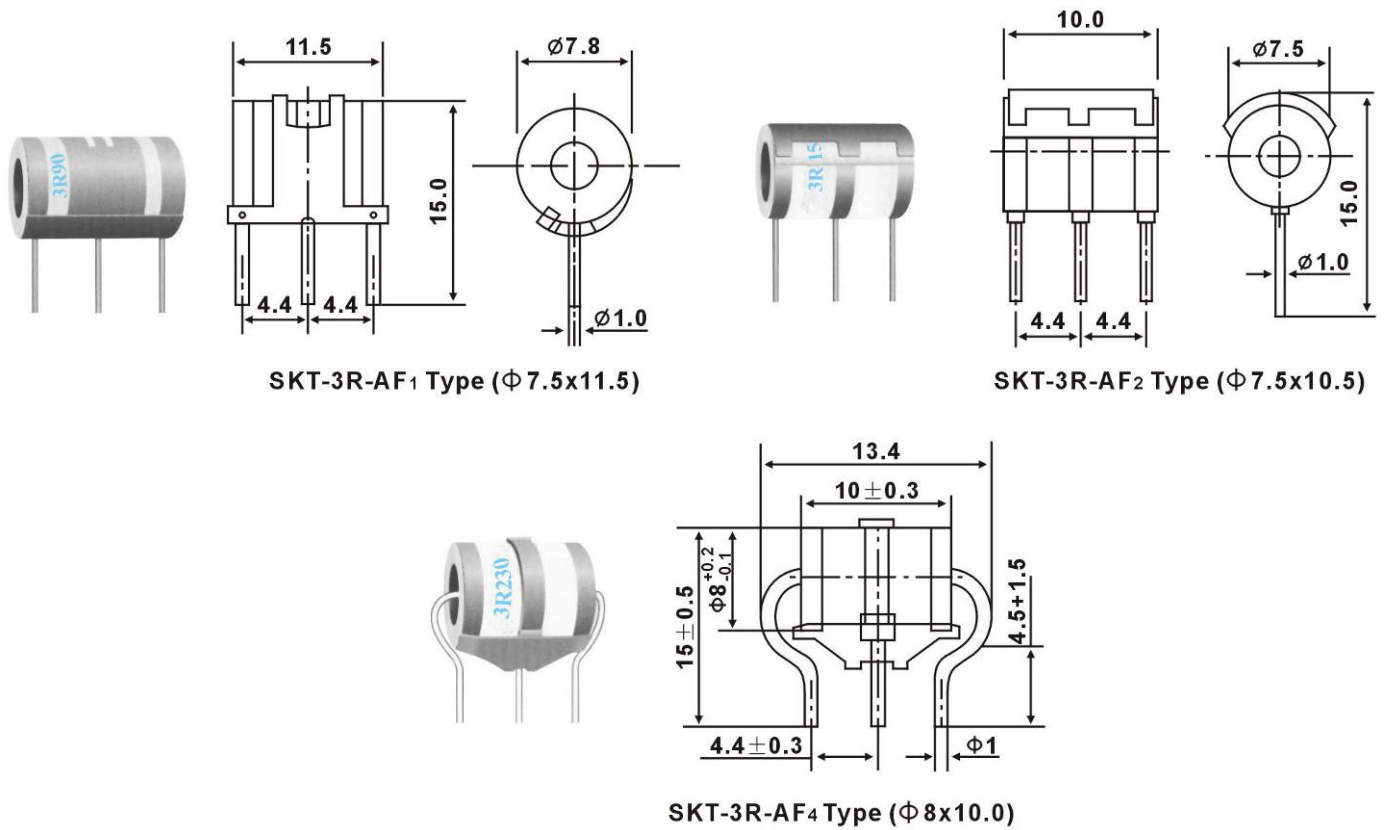

Electrical Characteristics										
Type	DC spark over voltage (100V/s) V	Impulse spark over voltage (1KV/us) V		Impulse discharge current (10/1000us 300times) A	Impulse discharge current (8/20us 10times) KA	AC discharge current (50Hz 1s 5 times) A	Holdover Voltage V	Insulation resistance Ω	Capacitance pF	Transverse voltage durationns
SKT-3R-75AF <sub>1</sub> SKT-3R-75AF <sub>2</sub> SKT-3R-75AF <sub>4</sub>	75±25%	≤600		50	10	10	/	≥10	<1.5	≤200
SKT-3R-90AF <sub>1</sub> SKT-3R-90AF <sub>2</sub> SKT-3R-90AF <sub>4</sub>	90±25%	≤600		50	10	10	/	≥10	<1.5	≤200
SKT-3R-150AF <sub>1</sub> SKT-3R-150AF <sub>2</sub> SKT-3R-150AF <sub>4</sub>	150±20%	≤700		100	10	10	80	≥10	<1	≤200
SKT-3R-230AF <sub>1</sub> SKT-3R-230AF <sub>2</sub> SKT-3R-230AF <sub>4</sub>	230	I	≤800	100	10	10	135	≥10	<1	≤200
		II	≤500	/						
SKT-3R-350AF <sub>1</sub> SKT-3R-350AF <sub>2</sub> SKT-3R-350AF <sub>4</sub>	350±20%	I	≤800	100	10	10	135	≥10	<1	≤200
		II	≤600	/						
SKT-3R-470AF <sub>1</sub> SKT-3R-470AF <sub>2</sub> SKT-3R-470AF <sub>4</sub>	470±20%	I	≤900	100	10	10	135	≥10	<1	≤200
		II	≤700	/						
SKT-3R-600AF <sub>1</sub> SKT-3R-600AF <sub>2</sub> SKT-3R-600AF <sub>4</sub>	600±20%	≤1200		100	10	10	135	≥10	<1	≤200

Note: Specification are subject to change without notice.

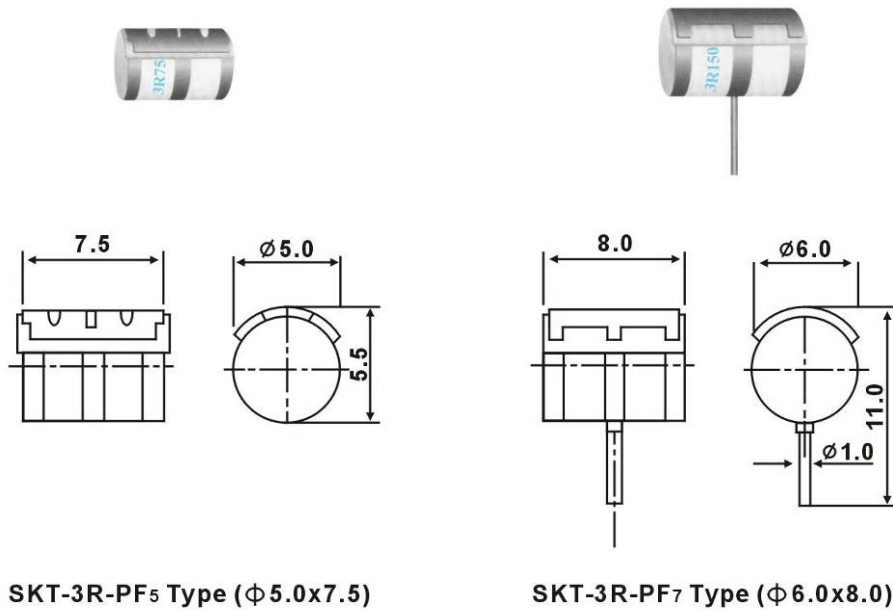**COMMON DIMENSIONS**

**SKT-3R-PF<sub>5</sub> Type (φ 5.0x7.5)**
**SKT-3R-PF<sub>7</sub> Type (φ 6.0x8.0)**
**Electrical Characteristics**

Type	DC spark-over voltage (100V/s) V	Impulse spark-over voltage (1KV/us) V	Impulse discharge current (10/1000us 300times) A	Impulse discharge current (8/20us 10times) KA	AC discharge current (50Hz 1s 5 times) A	Holdover Voltage V	Insulation resistance Ω	Capacitance pF	Transverse voltage durationns
SKT 3R-75PF <sub>5</sub> SKT 3R-75PF <sub>7</sub>	75±25%	≤600	50	10	10	/	≥10 <sup>10</sup>	<1.5	≤200
SKT 3R-90PF <sub>5</sub> SKT 3R-90PF <sub>7</sub>	90±25%	≤600	50	10	10	/	≥10 <sup>10</sup>	<1.5	≤200
SKT 3R-150PF <sub>5</sub> SKT 3R-150PF <sub>7</sub>	150±20%	≤700	100	10	10	80	≥10 <sup>10</sup>	<1	≤200
SKT 3R-230PF <sub>5</sub> SKT 3R-230PF <sub>7</sub>	230	I	≤800	100	10	135	≥10 <sup>10</sup>	<1	≤200
		II	≤500	/					
SKT 3R-350PF <sub>5</sub> SKT 3R-350PF <sub>7</sub>	350±20%	I	≤800	100	10	135	≥10 <sup>10</sup>	<1	≤200
		II	≤600	/					
SKT 3R-470PF <sub>5</sub> SKT 3R-470PF <sub>7</sub>	470±20%	I	≤900	100	10	135	≥10 <sup>10</sup>	<1	≤200
		II	≤700	/					
SKT 3R-600PF <sub>5</sub> SKT 3R-600PF <sub>7</sub>	600±20%	≤1200	100	10	10	135	≥10 <sup>10</sup>	<1	≤200

Note: Specification are subject to change without notice.