



# Major League Electronics .039 cl Socket Strips - Surface Mount

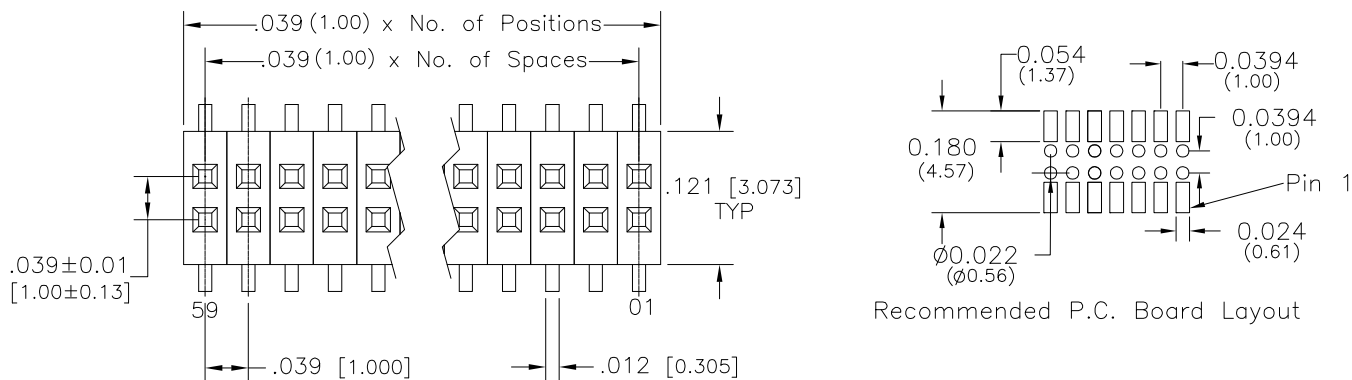

Tails may be clipped to achieve desired pin length

## Ordering Information

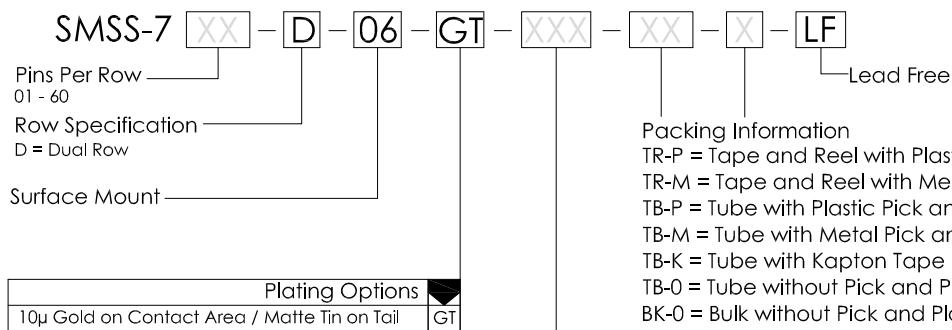

## Specifications

- Current Rating: 0.5 Ampere
- Insulation Resistance: 500MΩ Min.
- Dielectric Withstanding: 200V AC
- Contact Resistance: 20 mΩ Max.
- Operating Temperature: -40°C to +105°C
- Max. Process Temperature:
  - Peak: 260°C up to 10 secs.
  - Process: 230°C up to 60 secs.
  - Wave: 260°C up to 6 secs.
  - Reflow: 260°C up to 10 secs.
  - Manual Solder: 350°C up to 5 secs.

## Materials

- Contact Material: Phosphor Bronze
- Insulator Material: Nylon 6T

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice

SMSS-7-D-06 SERIES

.039 cl Dual Row - Surface Mount  
Socket Strips - Top Entry

06 MAR 07

Scale  
NTS

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS IN INCHES (MM)  
TOLERANCES ARE:

ONE PLACE DECIMALS ±.100  
TWO PLACE DECIMALS ±.010  
THREE PLACE DECIMALS ±.005  
FOUR PLACE DECIMALS ±.0020  
ANGLES  
±5°



4235 Earnings Way, New Albany, Indiana, 47150, USA  
 1-800-782-3486 (USA/Canada/Mexico)  
 Tel: 812-944-7244  
 Fax: 812-944-7268  
 E-mail: mle@mlelectronics.com  
 Web: www.mlelectronics.com

Edition  
1

Sheet  
1/1