


KST...AR-N/...

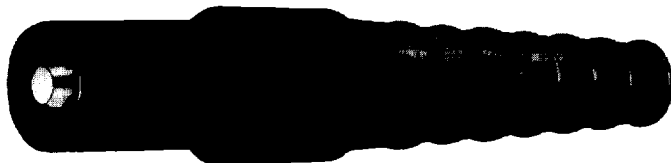

Plugs KST...AR-N/... with locking feature and crimp sleeve

Plugs with locking feature and for crimping onto highly flexible copper conductor with cross-sections of 25 mm² to 120 mm². Insulator made of black neoprene. Internal insulator sleeve made of black polyamide.

Available as individual parts.


Type	Part #	Conductor cross-section copper	Nominal dia. pin/socket	Weight	Rated current (80°C)	Rated voltage	Test voltage 50 Hz 1 min ²
		mm ²	mm	kg	A	V	kV
KST10AR-N/25	15.0011	25	10	0.151	130	500	2.5
KST10AR-N/35	15.0012	35	10	0.158	150	500	2.5
KST10AR-N/50	15.0013	50	10	0.159	180	500	2.5
KST14AR-N/50	15.0021	50	14	0.224	200	500	2.5
KST14AR-N/70	15.0022	70	14	0.229	240	500	2.5
KST14AR-N/95	15.0023	95	14	0.241	280	500	2.5
KST14AR-N/120	15.0024	120	14	0.241	300	500	2.5

Dimensions	øA	B	øD	øE	øF
KST10AR-N/25	10	~ 171	34	8	11
KST10AR-N/35	10	~ 158	34	9	13
KST10AR-N/50	10	~ 145	34	11	14.5
KST14AR-N/50	14	~ 197	38	11	14.5
KST14AR-N/70	14	~ 184	38	13	17
KST14AR-N/95	14	~ 171	38	15	20
KST14AR-N/120	14	~ 158	38	17	22

Please state color for masking tape: 0 - 9

Before mounting, cut sleeve according to conductor diameter.


Dimensions

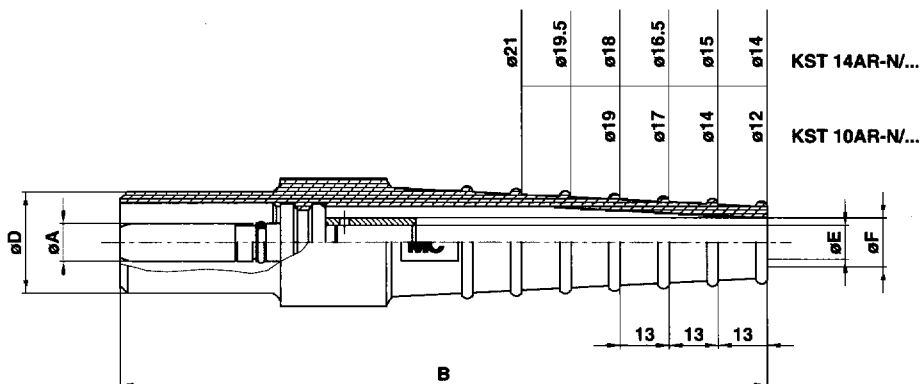

Individual parts

Item	Type	Part #	Diameter (mm)	Description	Colors
1	SP10AR-N/25	05.0203	10	Plug insert for 25 mm ²	
	SP10AR-N/35	05.0204	10	Plug insert for 35 mm ²	
	SP10AR-N/50	05.0205	10	Plug insert for 50 mm ²	
	SP14AR-N/50	05.0206	14	Plug insert for 50 mm ²	
	SP14AR-N/70	05.0207	14	Plug insert for 70 mm ²	
	SP14AR-N/95	05.0208	14	Plug insert for 95 mm ²	
	SP14AR-N/120	05.0209	14	Plug insert for 120 mm ²	
2	T10S	15.5011	10	Neoprene sleeve	
	T14S	15.5021	14	Neoprene sleeve	4

Individual Parts

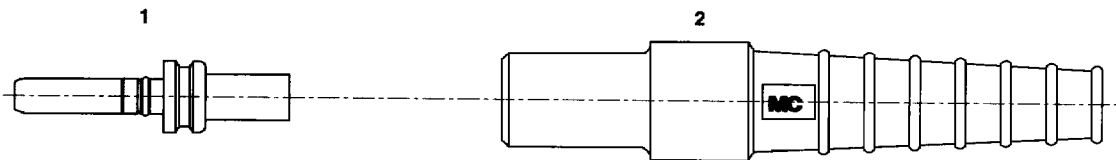

2) In mated condition only.

0 - green/yellow 1 - red 2 - blue 3 - white 4 - black 5 - yellow 6 - green 7 - brown 8 - gray 9 - violet