


75914-XXX-XX

- NUMBER OF POSITIONS
- PIN LENGTH
- PLATING
- BASIC PART NUMBER

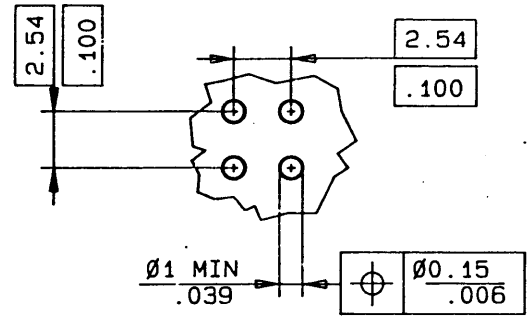

RECOMMENDED HOLE PATTERN

NOTES:

1. MATERIAL PIN :  
PHOSPHOR BRONZE A.S.T.M.  
B 159 ALLOY C 51000 H0 3
2. MATERIAL BODY :  
POLAMID, 30% GLASS FILLED FLAME RETARDANT  
PER U.L. 94 V-0 COLOUR BLACK
3. DIM. 1.27 +0.03 -0.13 FOR MOULDED SIDE(S) ONLY.  
IF SIDE(S) ARE BROKEN DIM 1.02 MIN TO  
1.70 MAX APPLIES.
4. PIN PUSH-OUT FORCE = 15N MIN

**CONTROLLED  
DOCUMENT**

**CUSTOMER COPY FOR REFERENCE ONLY**




stamp part no/rev ltr in area indicated by X		date		name		set1 code		SEE NOTES 1 & 2	
dr 881129		881129		I.BYE		scale		5:1	
chr 881129		881129		D.GREEN		finish		SEE SHEET 2	
appd 881129		881129		H.VAN.OYK		product no		75914-XXX-XX	
release no.						title		HEADER, STR, DOUBLE ROW, POST PLT PIN, 2.54mm	
D 11146		881129		IJB		dwg no		75914	
rev/scr no		date		dr		rev		sheet	
						D		213	
								1 of 2	



1			2			3			4			5			6																																																								
PRODUCT NUMBER	PRODUCT DIMENSIONS			PRODUCT NUMBER	PRODUCT DIMENSIONS			PRODUCT NUMBER	PRODUCT DIMENSIONS			PRODUCT NUMBER	PRODUCT DIMENSIONS			PRODUCT NUMBER	PRODUCT DIMENSIONS																																																						
	"A" ±0.2 .008	"B" ±0.25 .010	("L") REF		"A" ±0.2 .008	"B" ±0.25 .010	("L") REF		"A" ±0.2 .008	"B" ±0.25 .010	("L") REF		"A" ±0.2 .008	"B" ±0.25 .010	("L") REF		"A" ±0.2 .008	"B" ±0.25 .010	("L") REF																																																				
75914-X01-XX	5.72 .225	2.54 .100	10.8 .425	75914-X20-XX	15.37 .605	3.05 .120	20.96 .825	75914-X21-XX	20.45 .805	3.05 .120	26.04 1.025	75914-X22-XX	7.75 .305	3.05 .120	13.34 .525	75914-X23-XX	5.84 .230	4.95 .195	13.34 .525	75914-X24-XX	7.24 .284	3.05 .120	12.8 .504	75914-X25-XX	8.51 .335	3.18 .125	14.22 .560	75914-X26-XX	15.57 .613	2.84 .112	20.96 .825	75914-X27-XX	6.6 .260	2.67 .105	11.81 .465	75914-X28-XX	6.6 .260	4.19 .165	13.34 .525	75914-X29-XX	17.53 .690	3.43 .135	23.5 .925	75914-X30-XX	22.61 .890	3.43 .135	28.58 1.125	75914-X31-XX	8.2 .323	2.84 .112	13.59 .535																				
75914-X02-XX	5.84 .230	3.43 .135	11.81 .465	75914-X03-XX	5.72 .225	5.08 .200	13.34 .525	75914-X04-XX	5.72 .225	7.62 .300	15.88 .625	75914-X05-XX	5.72 .225	10.16 .400	18.42 .725	75914-X06-XX	5.72 .225	12.7 .500	20.96 .825	75914-X07-XX	5.72 .225	15.24 .600	23.5 .925	75914-X08-XX	5.72 .225	17.78 .700	26.04 1.025	75914-X09-XX	5.72 .225	20.32 .800	28.58 1.125	75914-X10-XX	5.72 .225	22.86 .900	31.12 1.225	75914-X11-XX	5.72 .225	5.97 .235	14.22 .560	75914-X12-XX	5.72 .225	8.51 .335	16.76 .660	75914-X13-XX	5.72 .225	11.05 .435	19.3 .760	75914-X14-XX	5.72 .225	16.13 .635	24.38 .960	75914-X15-XX	8.51 .335	2.54 .100	13.59 .535	75914-X16-XX	8.51 .335	5.51 .217	16.56 .652	75914-X17-XX	8.51 .335	10.59 .417	21.64 .852	75914-X18-XX	5.72 .225	3.05 .120	11.3 .445	75914-X19-XX	12.83 .505	3.05 .120	18.42 .725

CONTROLLED  
DOCUMENT

**CUSTOMER COPY FOR REFERENCE ONLY**

75914-4XX	1.27µm 50u Au OVER	2.03µm 80u Ni	75914-9XX	2.03µm 80u Au OVER	1.27µm 50u Ni	 stamp part no/rev ltr in area indicated by X	 scale 5: 1	matl code SEE SHEET 1
75914-3XX			75914-8XX	1.27µm 50u Au OVER	3µm 118u Ni		finish SEE TABLE	
75914-2XX	1.27µm 50u Au OVER	1.27µm 50u Ni	75914-7XX	3µm 118u Au OVER	1.27µm 50u Ni		product no 75914-XXX-XX	
75914-1XX	0.76µm 30u Au OVER	1.27µm 50u Ni	75914-6XX	5.08µm 200u Au OVER	1.27µm 50u Ni		title HEADER, STR, DOUBLE ROW, POST PLT PIN, 2.54mm	
75914-0XX			75914-5XX	2.03µm 80u Au OVER	2.03µm 80u Ni		date 881129 name I.BYE chr 881129 D.GREEN appd 881129 H.VAN.DYK release no.	
PLATING CODE	MINIMUM PLATING THICKNESS		PLATING CODE	MINIMUM PLATING THICKNESS			dwg no 75914 rev D sheet 213 2 of 2	
CAD PRODUCED			SEE SHEET 1					

CAD PRODUCED

A3