


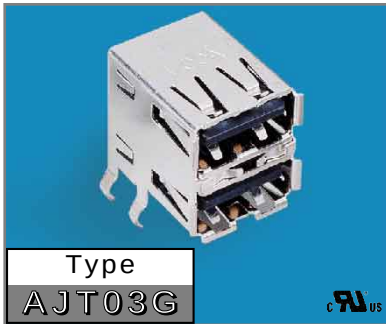


- USB A
- Stacked
- Enhanced Shielding
- 4 Positions

Technical Data


Shield: Copper Alloy (t=0.3mm) 120u" Tin-Lead min over 50u" Nickel or 100u"~120u" Ni over 30u" Cu
Contact: C5191 Phosphor Bronze hard (t=0.25mm) Tails-150u" Tin-Lead min over 50u" Nickel
Plating: Shield-selective plating. Contact-area-selective plating
Housing: PBT+30% G.F. UL94V-0. Standard color Black

For electrical specifications see page 4

Dimensions (mm)

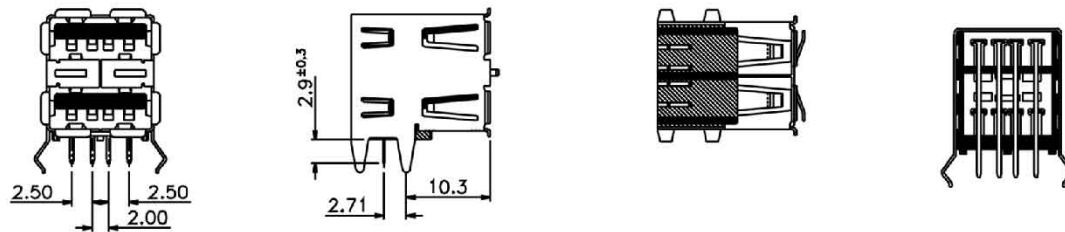

PC Board Layout



Ordering Information

A	J	T	0	3	G	4	4	1	3	- 001
Type	Style	Positions	Contacts	Ports	Plating	Shield				
					3=30u" 4=50u"	001=100u" ~120u" nickel over 30u" Copper 002=120u" tin lead over 50u" Nickel				

Ports	Order No.
1	AJT03G4413-001 100u"~120u" nickel over 30u" Copper
1	AJT03G4413-002 120u" tin lead over 50u" Nickel

Standard color: black