

3-Leiter-Filter


3-Line Filters


Umrichter/Leistungselektronik B84143-A*-R

- Für 3-Phasen-Systeme
- Metallgehäuse
- Berührungssichere Reihen-
klemmen

Bemessungs-
spannung U_R : 440/250 V~,
50/60 Hz

Klimakategorie: 25/100/21

Approbationen:  in Vorbereitung

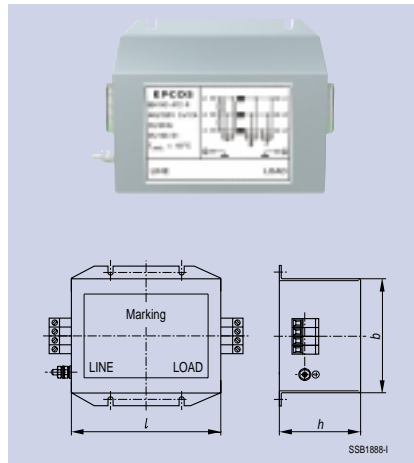


Converters/power electronics B84143-A*-R

- For 3-phase systems
- Metal case
- Safe-to-touch terminal blocks

Rated voltage V_R : 440/250 V~,
50/60 Hz

Climatic category: 25/100/21

Approvals:  pending

I_R A	I_{Abl} I_{leak} mA	R_{typ} mΩ	Maße Dimensions l x b x h (mm)	Bestellnummer Ordering code	Approbationen Approvals 
8	< 3,5	40	141 x 86 x 81	B84143-A8-R	x
12	< 3,5	20	141 x 86 x 81	B84143-A12-R	x
16	< 3,5	15	141 x 86 x 81	B84143-A16-R	x
25	< 3,5	8	166 x 126 x 91	B84143-A25-R	x
36	< 3,5	3,8	166 x 126 x 91	B84143-A36-R	x
50	< 6	2,0	166 x 126 x 91	B84143-A50-R	x
80	< 6	1,0	221 x 141 x 141	B84143-A80-R	x
120	< 6	0,75	261 x 141 x 141	B84143-A120-R	x
150	< 6	0,4	261 x 141 x 141	B84143-A150-R	x
180	< 6	0,4	301 x 141 x 141	B84143-A180-R	x


Filter für höhere Ströme siehe B84143-B*-S20, Seite 36. / For filters for higher currents see B84143-B*-S20, page 36.

Footprintfilter B84143-A*-R206

- Für 3-Phasen-Systeme
- Metallgehäuse
- Berührungssichere
Reihen-klemmen/Litzen

Bemessungs-
spannung U_R : 480/275 V~,
50/60 Hz

Klimakategorie: 25/100/21

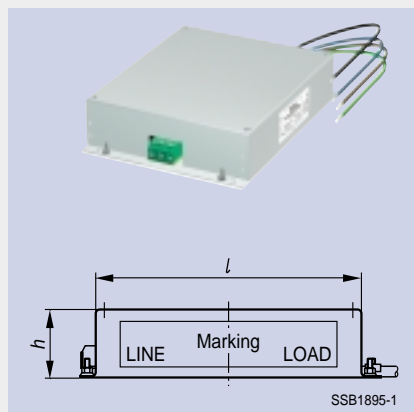

Footprint filter B84143-A*-R206

- For 3-phase systems
- Metal case
- Safe-to-touch terminal blocks/
litz wires

Rated voltage V_R : 480/275 V~,
50/60 Hz

Climatic category: 25/100/21

I_R A	I_{Abl} I_{leak} mA	R_{typ} mΩ	Maße (mm) Dimensions (mm)		Bestellnummer Ordering code
			l x h	Breite / Width	
6	< 3,5	72	174 x 43,5	73	B84143-A6-R206
12	< 3,5	21	187 x 43,0	149	B84143-A12-R206
25	< 6	8,5	219 x 55,0	185	B84143-A25-R206