

SPECIFICATIONS

Mechanical

Coupling Torque: 0.7 N.m ~ 1.1 N.m
Durability: 500 Cycles

Electrical


Impedance: 50 W (Nominal)
Frequency Range: 0~11 GHz
VSWR: 1.20 max. (0~4 GHz), 1.35 max. (4~11 GHz)
Voltage Rating: 1000 V
Dielectrical Withstanding Voltage: 2500 V
Insulation Resistance: 5000 MW min.

Physical


Body: Brass
Insulator: PTFE
Contact: Brass
Plating: See "ORDERING INFORMATION"
Operating Temperature: -65 to +165

RF Coaxial Connector

N Series
R/A Plug
Clamp Cable



DRAWING

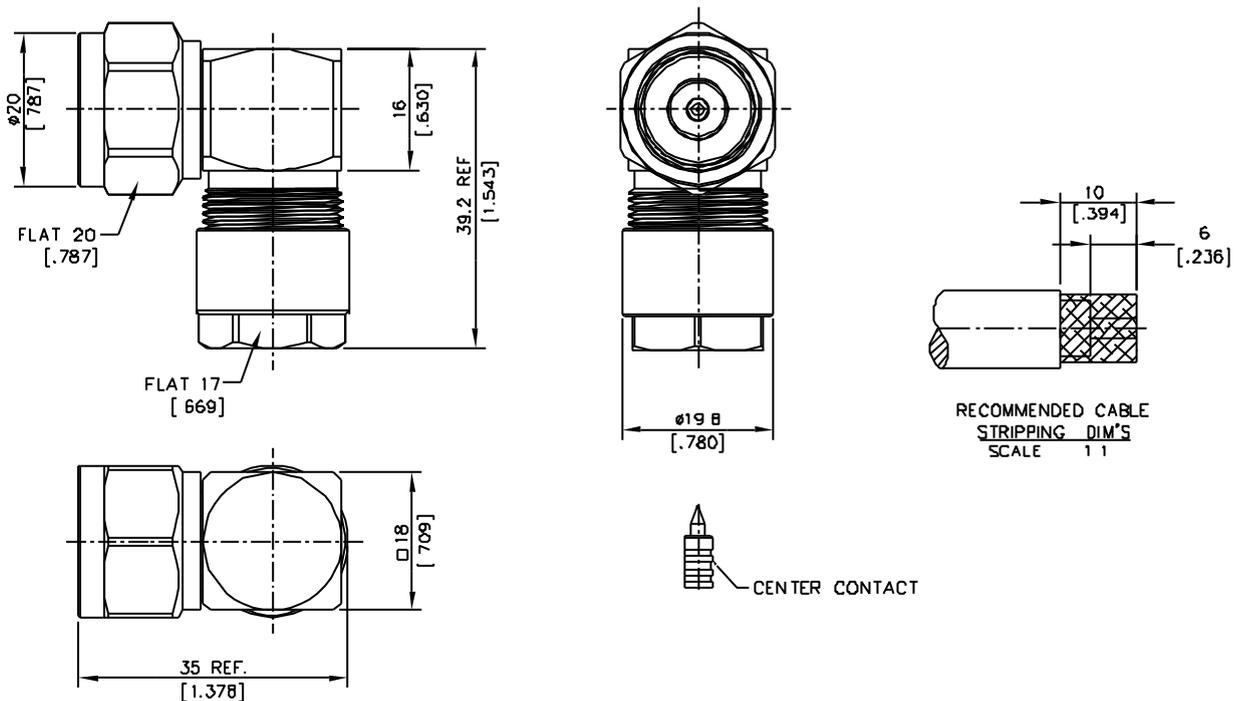

ORDERING INFORMATION

PRODUCT NO.: KFN1C05-Q001-EF

